

產品內容

除了本『快速上手指南』外，此產品內容還包括以下這些配件：




MDCL-705i



RS-232 纜線
(CA-0910)



螺絲起子



歐式壓著端子
x 32

技術支援


service@icpdas.com

www.icpdas.com

技術資源

如何在 ICP DAS 網站上搜索 driver、手冊和規格

- 行動版網站

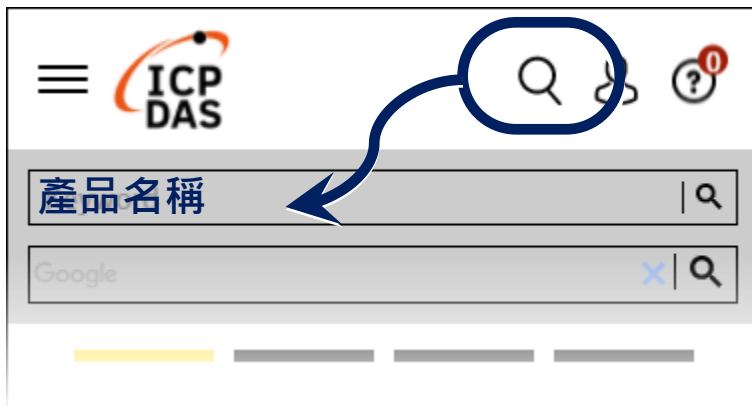


- 一般網站

1 連接主機、網路及電源

Step1. 將 MDCL-705i 的乙太網路埠連到與 PC 同一個網域的交換器。

Step2. 連接 +10 ~ +48 VDC 電源供應器。

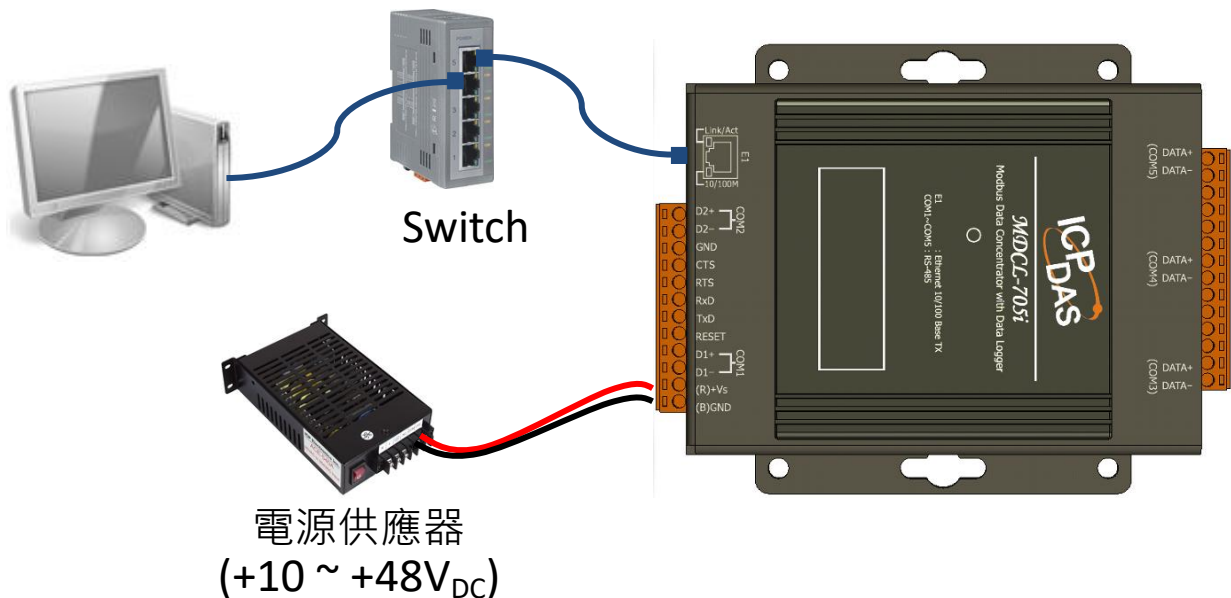

2 建立使用者帳號

第一次登入時，需建立使用者帳號。開始設定之前，請先確認 MDCL-705i 模組已開機且連接到您的網路。請記得記下 PC 原本的 IP 設定，並在稍後回復這些設定。

MDCL-705i 的 IP 預設值如下：

項目	預設值
IP 位址	192.168.255.1
子網路遮罩 (Subnet mask)	255.255.0.0
通訊閘 (Gateway)	192.168.0.1

Step1. 從 192.168.255.2 到 192.168.255.253 的範圍之間找一個未被使用的 IP 位址, 設定到電腦中。

NOTE: 修改電腦 IP 位址的設定方式與您所使用的作業系統有關, 請查詢作業系統的使用說明進行 IP 位址的設定。

Step2. 在網頁瀏覽器的網址列輸入 MDCL-705i 的預設 IP 位址 (http://192.168.255.1), 並按下 Enter 鍵。

Step3. 建立使用者帳號與密碼 (僅第一次登入時需建立)。

帳號與密碼須為 4 個字元以上的英文(大小寫視為不同字元), 數字以及特殊符號 dot(.), dash (-), underline (_)與 at (@).

The screenshot shows a web form titled "Create Your Account". Below the title is a sub-header: "To log in for the first time you will need to create an administrator account." The form contains three input fields: "USERNAME", "PASSWORD", and "CONFIRM PASSWORD". At the bottom of the form is a blue button labeled "CREATE ACCOUNT". To the right of the form, a yellow box contains four numbered instructions with arrows pointing to the corresponding form elements: 1. 輸入管理者帳號 (points to USERNAME), 2. 輸入密碼 (points to PASSWORD), 3. 再次輸入密碼 (points to CONFIRM PASSWORD), and 4. 點擊 **CREATE ACCOUNT** (points to the button). At the bottom of the form, the text "MDC-705i-DL Ver 1.00.001" is visible.

Step4. 輸入使用者帳號與密碼, 登入模組。

The screenshot shows a web form titled "Account Created". Below the title is a sub-header: "Use your username and password to access your administrator account." The form contains two input fields: "USERNAME" and "PASSWORD". At the bottom of the form is a blue button labeled "LOGIN". To the right of the form, a yellow box contains three numbered instructions with arrows pointing to the corresponding form elements: 1. 輸入帳號 (points to USERNAME), 2. 輸入密碼 (points to PASSWORD), and 3. 點擊 **LOGIN** (points to the button). At the bottom of the form, the text "MDC-705i-DL Ver 1.00.001" is visible.

3 設定 IP 位址

Step1. 選擇 GENERAL SETTINGS 的 NETWORK SETTINGS 頁籤，輸入有效的 IP/Subnet Mask 與 Gateway 位址，再點擊 SAVE 按鈕。

GENERAL SETTINGS

1 General Settings

NETWORK SETTINGS USER MANAGEMENT DATE/TIME FTP SERVER FILE MANAGER

IP Address Subnet Mask Default Gateway

10.1.112.10 255.255.0.0 10.1.0.254

DNS Server 1 DNS Server 2

10.0.0.6 10.0.0.9

HTTP Port Modbus TCP Port

80 502

CANCEL SAVE 3

Step2. 選擇 Restart Now 立即重啟模組。

HTTP Port Modbus TCP Port

80 502

CANCEL SAVE

✓ New settings are properly configured.
Restart the device for the changes to take effect? Restart Now | Restart Later

立即重啟

Step3. 將電腦的 IP 改回原來的設定，在瀏覽器的網址列輸入 MDCL-705i 新的 IP 位址後，按下 Enter 鍵進入網頁界面進行其他設定。