

產品內容

除了本『快速上手指南』外，此產品內容還包括以下這些配件：



CAN-2060C/D



螺絲起子

技術資源


技術支援

service@icpdas.com


www.icpdas.com

如何在 ICP DAS 網站上搜索 driver、手冊和規格

- 行動版網站

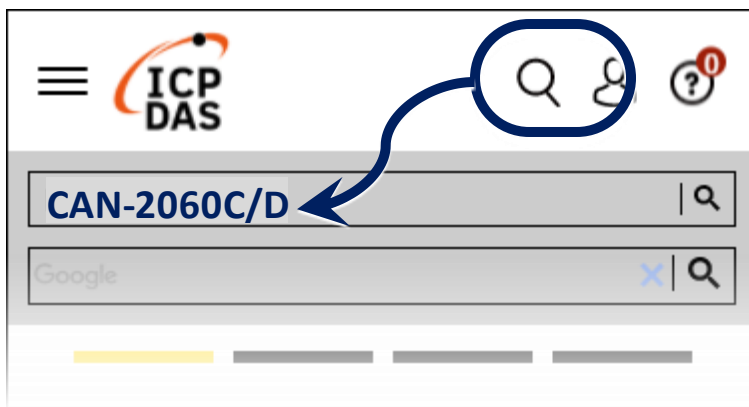


- 一般網站

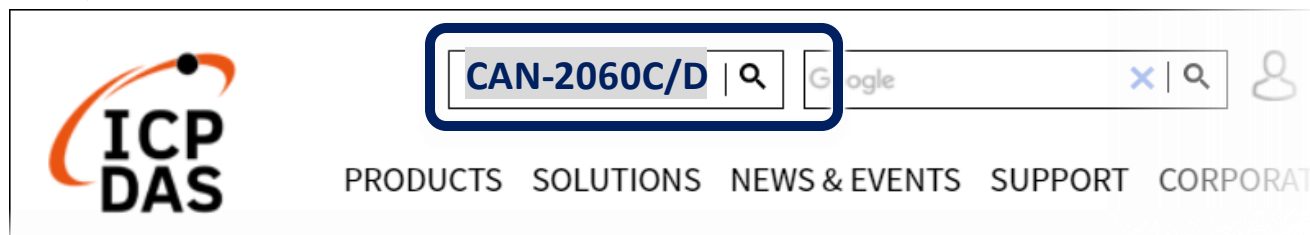

1 調整站號、通訊速率及終端電阻

依使用者對於 CANopen/DeviceNet 網路的需求，設定本模組在 CANopen/DeviceNet 網路上的站號以及共同通訊速率，如果本模組位於網路的終端，根據標準 CANopen/DeviceNet 網路規範，本模組須啟用終端電阻。

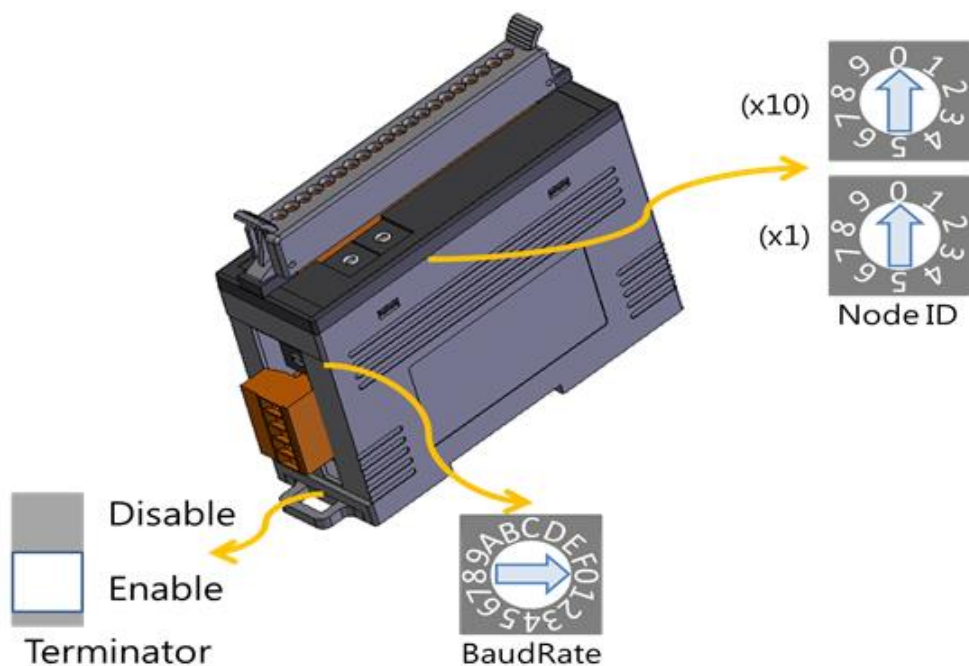

CAN-2060C

BaudRate Rotary Switch	BaudRate (k bps)
0	10
1	20
2	50
3	125
4	250
5	500
6	800
7	1000

CAN-2060D

BaudRate Rotary Switch	BaudRate (k bps)
0	125
1	250
2	500

2 I/O 點接線方式


Input Type Dry Contact	ON State LED ON	OFF State LED OFF
Relay Contact	Relay ON 	Relay Off
TTL/CMOS Logic	Voltage < 1V Logic Level Low 	Voltage > 3.5V Logic Level High
Open Collector	Open Collector On 	Open Collector Off

Input Type Dry Contact	ON State LED ON	OFF State LED OFF
Relay Contact	Relay ON 	Relay Off
TTL/CMOS Logic	Voltage > 3.5V Logic Power Logic Level Low 	Voltage < 1V Logic Power Logic Level High
NPN Output	Open Collector On 	Open Collector Off
PNP Output	Open Collector On 	Open Collector Off


Output Type	ON State LED ON	OFF State LED OFF
Relay	Relay ON 	Relay Off

3 CAN 通訊埠接線方式

兩線式接線

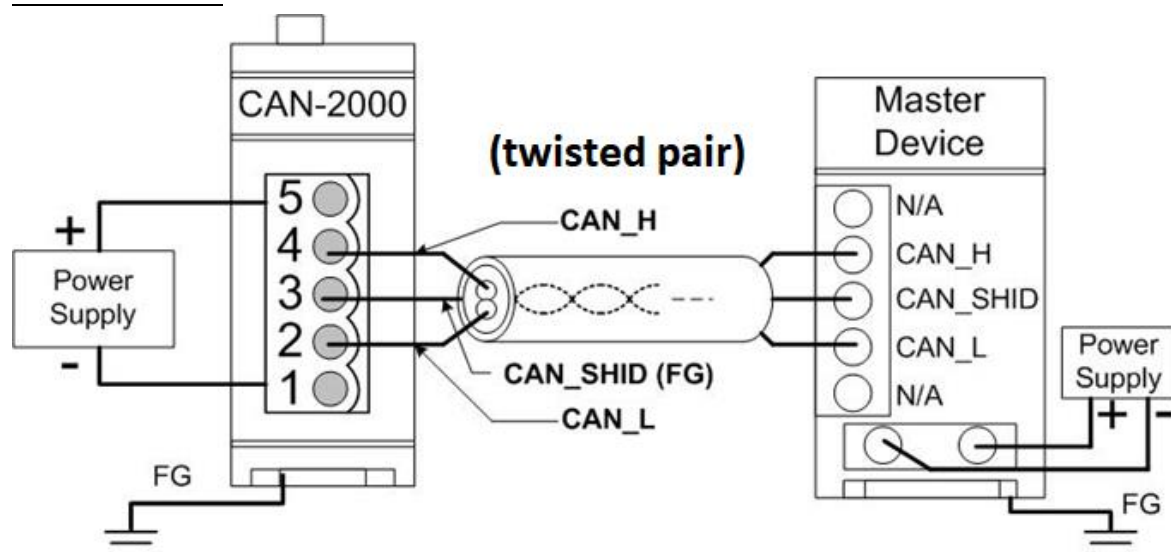

三線式接線

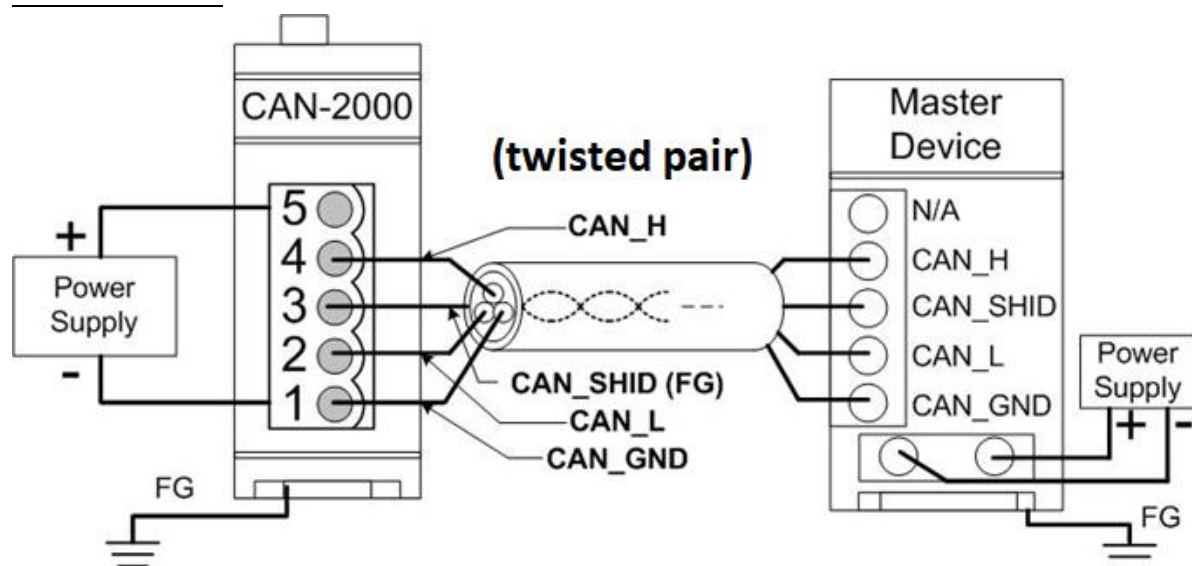

四線式接線

