



80188-40/80CPU
 SRAM: 512K
 Flash Memory: 512K
 Real Time Clock
 Watch Dog Timer

I-8000 Series

COM 4: RS-232

LED Indicator

COM 3: RS-232/485

COM 1: RS-232

DC Power Input +10V ~ 30V

I/O Modules:

- Digital Input/Output
- Analog Input/Output
- Counter/frequency
- Motion Control
- RS-232/422/485
- MMC CARD



Ethernet







Operation Temp.:
 -25°C ~ +75°C

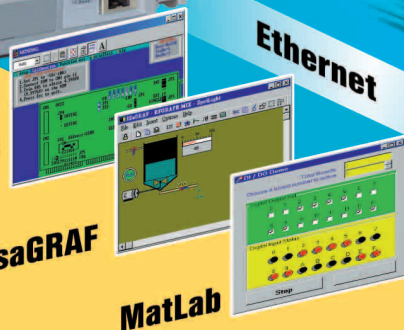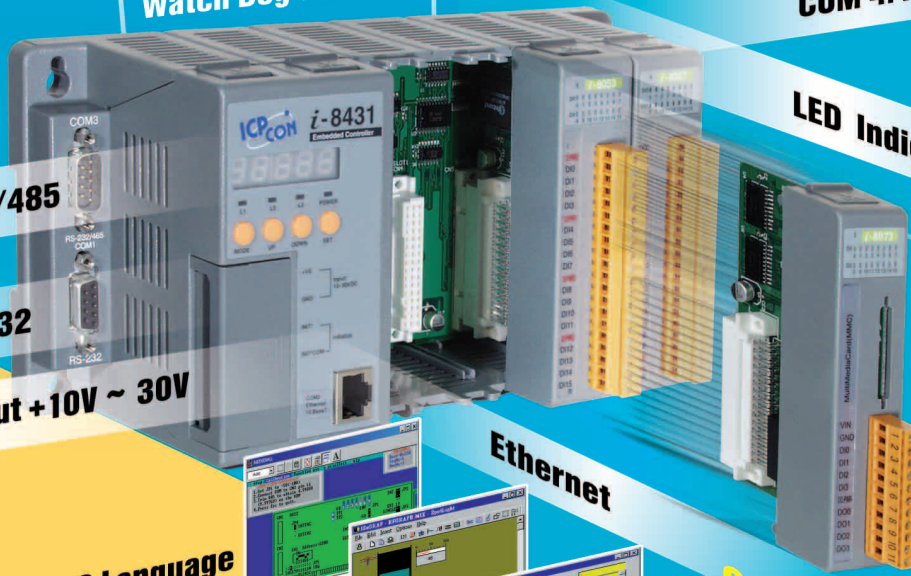





C Language

IsaGRAF

MatLab



Embedded Controller		4 Slot Economical Type	4 Slot StandardType	8 Slot Economical Type	8 Slot StandardType
Operation System	Spec.	Flash: 256K SRAM: 128K COM1: RS-485 COM3: RS232/485	Flash: 512K SRAM: 512K COM1: RS-485 COM3: RS232/485 COM4: RS-232	Flash: 256K SRAM: 128K COM1: RS-485 COM3: RS232/485 COM4: RS-232	Flash: 512K SRAM: 512K COM1: RS-485 COM3: RS232/485 COM4: RS-232
MiniOS7	COM2: RS-485	 I-8410	 I-8411	 I-8810	 I-8811
IsaGRAF Driver Inside	COM2: RS-485		 I-8417		 I-8817

Embedded Internet/Ethernet Controller		4 Slot Economical Type	4 Slot StandardType	8 Slot Economical Type	8 Slot StandardType
Operation System	Spec.	Flash: 256K SRAM: 128K COM1: RS-485 COM2: RS-485 COM3: RS232/485	Flash: 512K SRAM: 512K COM1: RS-485 COM2: RS-485 COM3: RS232/485 COM4: RS-232	Flash: 256K SRAM: 128K COM1: RS-485 COM2: RS-485 COM3: RS232/485 COM4: RS-232	Flash: 512K SRAM: 512K COM1: RS-485 COM2: RS-485 COM3: RS232/485 COM4: RS-232
MiniOS7	10M Ethernet	 I-8430	 I-8431	 I-8830	 I-8831
IsaGRAF Driver Inside	10M Ethernet		 I-8437		 I-8837

Expansion Unit	4 Slot	5 Slot	8 Slot	9 Slot
• RS-485 Interface • Support Serial Module Only	 I-87K4	 I-87K5	 I-87K8	 I-87K9

Web Site: <http://www.icpdas-usa.com>