

CAN-2053C Quick Start

v1.30, Nov 2021

Packing List

In addition to this guide, the package includes the following items:







CAN-2053C

Screw Driver


Quick Start

Resources

Technical Support

service@icpdas.com www.icpdas.com How to search for drivers, manuals and spec information on ICP DAS website.

• For Mobile Web

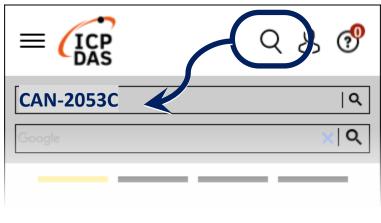


• For Desktop Web





1 Node ID, baud rate and terminal resistance

According to the user's requirements for CANopen network, set the node ID and CAN baud rate of this module on the CANopen network. If the module is located at the terminal of the network, according to the standard CANopen network specification, this module must enable the terminal resistance.

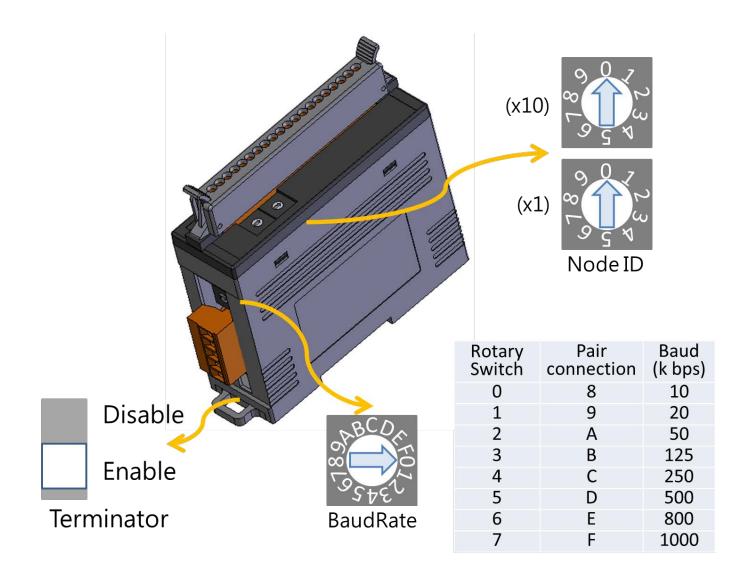

2 I/O channel connection

Input Type	ON State LED ON Readback as 1	OFF State LED OFF Readback as 0
Relay Contact	Relay On	Relay Off
	+ DI.COM	+ DI.COM
TTL/CMOS Logic	Voltage > 3.5 V	Voltage < 1 V
	Logic Power	Logic Power
NPN Output	Open Collector On	Open Collector Off
PNP Output	Open Collector On	Open Collector Off

3 CAN port connection

