

Packing List

In addition to this guide, the package includes the following items:



iP-8417/iP-8817/
iP-8447/ iP-8847



D-SUB Cable
(CA-0915)



Screw Driver



7000/8000 DVD

The default IP settings for Ethernet PAC are as follows:


IP Address : 192.168.255.1
Mask : 255.255.0.0
Gateway : 192.168.0.1

- For Mobile Web

Resources

How to search for drivers, manuals and spec information on ICP DAS website.

- For Desktop Web

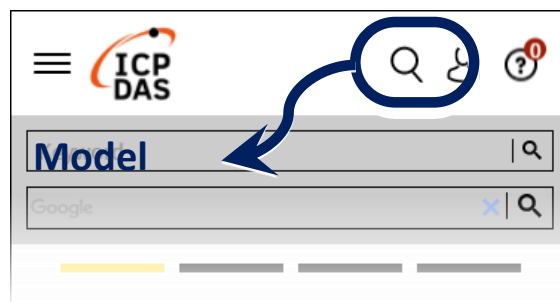

Connect to the power supply

Technical Support

service@icpdas.com
www.icpdas.com

