

i-7188 **Palm-size Embedded Controller** SERIES

**I-7188/I-7188D/I-7188XA/I-7188XAD
I-7188XB/I-7188XBD, I-7188XC/I-7188XCD**



Introduction

The I-7188 series controllers are designed for Palm-size embedded systems that require high reliability, PC-compatibility, and compactness at a reasonable price. The controllers can be integrated into an OEM product as a processor core component. By building your product around an I-7188 series controller, you reduce the time from design to market introduction, cut development costs, minimize technical risks, and deliver a more reliable product. I-7188 is a first generation product while the I-7188XA, I-7188XB and I-7188XC are all second-generation products. The major differences are communication ports, digital I/O port, and user defined I/O pins. Except I-7188, all I-7188XA/XB/XC support an I/O expansion bus.

I/O Expansion Bus and Expansion Board

The I-7188XA, I-7188XB and I-7188XC support an I/O expansion bus. The I/O expansion bus can be used to implement various I/O functions such as D/I, D/O, A/D, D/A, Timer/Counter, UART, flash memory, battery backup SRAM, AsicKey & other I/O functions. Nearly all kinds of I/O functions can be implemented by this bus. Our I/O expansion boards offer features in addition to those provided by the I-7188XA/XB/XC embedded controller. Expansion board can increase controller's I/Os and memory storage capabilities. The integrated modular design of the expansion board allows a fast, easy, and flexible way of upgrading our controller's capability. Each I/O expansion bus supports one expansion board.

i-7188 *Palm-size Embedded Controller*

SERIES

Embedded Controller Selection Guide

Model Number	I-7188 I-7188D	I-7188XA I-7188XAD	I-7188XB I-7188XBD	I-7188XC I-7188XCD
CPU (80188)	40M Hz	40M Hz	40M Hz/80MHz(NEW)	20.2752 MHz
SRAM	256K	512K	256K* (can be up to 512K for OEM version, see Note1)	128K
Battery backup SRAM Board (128K Bytes or 512K Bytes)	No	X607: 128K Bytes memory expansion board X608: 512K Bytes memory expansion board	X607: 128K Bytes memory expansion board X608: 512K Bytes memory expansion board	X607: 128K Bytes memory expansion board X608: 512K Bytes memory expansion board
Flash	256K/512K	512K	512K	256K (can be up to 512K for OEM version; see Note1)
COM Port	4	4	2 (Note3)	2
Program download	Yes, COM4 (Note 4)	Yes, COM4 (Note 4)	Yes, COM1 (Note 4)	Yes, COM1 (Note 4)
Modem Control	COM1	COM1	No	No
COM2	Non-isolated	3000V Isolation	Non-isolated (OEM version can be isolated, see Note1)	Non-isolated (OEM version can be isolated, see Note1)
Self-Tuner on RS-485	No	COM1 & COM2	COM1 & COM2	COM1 & COM2
Real Time Clock	Yes	Yes	Yes	No (OEM version can be available, Note1)
EEPROM	2K bytes	2K bytes (Can be up to 128K Bytes for OEM customers)	2K bytes (Can be up to 128K Bytes for OEM customers)	2K bytes (Can be up to 128K Bytes for OEM customers)
I/O expansion Bus	No	Yes	Yes	Yes
User Defined Pins	No	No	14	3
D/I (3.5V~30V)	No	2 channels+INIT*	1 channel+INIT*	2 channels+INIT*
D/O (100mA, 30V)	No	2 channels	1 channel	3 channels
Support 64-bit hardware unique serial number	No	Yes	Yes	No
7-segment Display	7188D only	7188XAD only	7188XBD only	7188XCD only
Operating system	MiniOS7	MiniOS7	MiniOS7	MiniOS7
programming Language	TC/MSC	TC/MSC	TC/MSC	TC/MSC
Power consumption	2.0W (7188) 3.0W (7188D)	2.0W (7188XA) 3.0W (7188XAD)	2.0W (7188XB) 3.0W (7188XBD)	2.0W (7188XC) 3.0W (7188XCD)

Note1: Call manufacturer or distributor for detail information

Note2: Can choose appropriate I/O expansion board to add DI/O.

Note3: COM1 can be used as 5-wire RS-232 port or 2-wire RS-485 port

Note4: Can be update:can be set to any com port (MiniOS7 2.0 or later)

i-7188 *Palm-size Embedded Controller*

SERIES



Features

- 80188-40 embedded CPU
- Built-in RTC, NVRAM, EEPROM
- Built-in COM port: COM1, COM2, COM3, COM4
- Built-in watchdog timer
- Built-in power protection circuit
- Built-in RS-485 network protection circuit
- BIOS support RTC time & date
- Built-in MiniOS7
- Program download port: COM4

Applications

- Factory Automation
- Protocol Converter
- Building Automation

Ordering Information

- **I-7188/512:**
Embedded Controller with 512K flash
- **I-7188D/512:**
I-7188/512 with Display
- **I-7188/256:**
Embedded Controller with 256K flash
- **I-7188D/256:**
I-7188/256 with Display

Options

- **PWR-24/110:**
Wall-plug Power Adaptor/110VAC/
60Hz/3.6W
- **PWR-24/220:**
Wall-plug Power Adaptor/220VAC/
50Hz/3.6W
- **PWR-24/230:**
Wall-plug Power Adaptor/230VAC/
50Hz/3.6W

Specifications

- CPU: 80188-40 compatible
- SRAM: 256K bytes
- Flash Memory: 256/512K bytes
- NVSRAM: 31 bytes
- EEPROM: 2048 bytes
- Real Time Clock
- COM1: RS-232 (9 pins) or RS-485
- COM2: RS-485
- COM3: RS-232 (3 pins)
- COM4: RS-232 (3 pins)
- Operating Temp.: -25°C to +75°C
- Storage Temp.: -40°C to +80°C
- Power requirement: Unregulated
10~30 VDC power
- Power Consumption:
2.0W for I-7188/512; 3.0W for
I-7188D/512
- Dimensions:
123mm x 72mm x 33mm

i-7188XA *Expandable Embedded Controller*

SERIES



Ordering Information

- **I-7188XA:**
Embedded Controller
- **I-7188XAD:**
I-7188XA with Display
- Options**
- **PWR-24/110:**
Wall-plug Power Adaptor/110VAC/
60Hz/3.6W
- **PWR-24/220:**
Wall-plug Power Adaptor/220VAC/
50Hz/3.6W
- **PWR-24/230:**
Wall-plug Power Adaptor/230VAC/
50Hz/3.6W
- **X600:**
4 mega bytes Flash memory board
- **X601:**
8 mega bytes Flash memory board
- **X607:**
128K bytes SRAM board
- **X608:**
512K bytes SRAM board

Features

- 80188-40 Compatible
- Built-in RTC, NVRAM, EEPROM
- Built-in COM port: COM1, COM2, COM3, COM4
- 3000V Isolation voltage on RS-485 port
- Support I/O expansion bus interface
- Two digital input Channels
- Two Open-collector output Channels
- Built-in self-tuner ASIC chip for RS-485 port
- Built-in MiniOS7
- Program download port: COM4

Specifications

- CPU: 80188-40
- SRAM: 512K bytes
- Flash Memory: 512K bytes
- NVSRAM: 31 bytes
- EEPROM: 2048 bytes
- Real Time Clock
- COM1: RS-232 (9 pins) or RS-485 Jumper Select
- COM2: RS-485
- COM3: RS-232 (3 pins)
- COM4: RS-232 (3 pins)
- Digital Input channels: 2
- Digital Output channels: 2
- Operating Temp.: -25°C to +75°C
- Storage Temp.: -40°C to +80°C
- Power requirement: Unregulated 10~30 VDC power
- Power Consumption:
2.0W for I-7188XA;
3.0W for I-7188XAD
- Dimensions:
123mm x 72mm x 33mm

i-7188XB *Expandable Embedded Controller*

SERIES



Ordering Information

- **I-7188XB:**
Embedded Controller with 512K Flash and 256K SRAM
- **I-7188XBD:**
I-7188XB-256 with Display
- **OEM Version**
- **I-7188XB/512:**
Embedded Controller with 512K Flash and 512K SDRAM
- **I-7188XBD/512:**
I-7188XB-512 with Display
- **Options**
- **PWR-24/110:**
Wall-plug Power Adaptor/110VAC/ 60Hz/3.6W
- **PWR-24/220:**
Wall-plug Power Adaptor/220VAC/ 50Hz/3.6W
- **PWR-24/230:**
Wall-plug Power Adaptor/230VAC/ 50Hz/3.6W
- **X600:**
4 mega bytes Flash memory board
- **X601:**
8 mega bytes Flash memory board
- **X607:**
128K bytes SRAM board
- **X608:**
512K bytes SRAM board

Features

- 64-bit hardware unique serial number inside
- User defined D/I/O
- COM driver support interrupt & 1K QUEUE input buffer
- COM port: COM1, COM2
- Built-in RTC, NVRAM, EEPROM
- One DI and one DO channel
- Built-in I/O expansion bus interface
- Can add on one expansion board
- Built-in self-tuner ASIC chip for RS-485 port
- Optional 7-segment LED display
- Built-in ICP DAS's MiniOS7
- Program download port: COM1

Specifications

- CPU: 80188-40 Compatible
- SRAM: 256K bytes (for I-7188XB)
- 512K bytes (for I-7188XB/512)
- Flash Memory: 512K bytes
- NVSRAM: 31 bytes
- EEPROM: 2048 bytes
- Real Time Clock
- COM1: RS-232 (5 pins) / RS-485
- COM2: RS-485
- Digital Input channel: 1
- Digital Output channel: 1
- User defined I/O pins: X1~X14
- Operating Temp.: -25°C to +75°C
- Storage Temp.: -40°C to +80°C
- Power requirement: Unregulated 10~30 VDC power
- Power Consumption:
2.0W for I-7188XB;
3.0W for I-7188XBD
- Dimensions:
123mm x 72mm x 33mm

i-7188XG *Expandable ISaGRAF Embedded Controller*

SERIES



Ordering Information

- **I-7188XG:**
ISaGRAF Embedded Controller
- **I-7188XGD:**
ISaGRAF Embedded Controller with Display
- Options**
- **PWR-24/110:**
Wall-plug Power Adaptor/110VAC/
60Hz/3.6W
- **PWR-24/220:**
Wall-plug Power Adaptor/220VAC/
50Hz/3.6W
- **PWR-24/230:**
Wall-plug Power Adaptor/230VAC/
50Hz/3.6W
- **X600:**
4 mega bytes Flash memory board
- **X601:**
8 mega bytes Flash memory board
- **X607:**
128K bytes SRAM board
- **X608:**
512K bytes SRAM board
- **ISaGRAF-256:**
ISaGRAF Workbench Software
up to 256 I/O Tags.

Features

- Include features of I-7188XB
- Built-in ISaGRAF driver & License
- Programming Languages:
IEC61131-3: LD, ST, FBD, SFC, IL
Flow Chart.
- Modbus RTU (RS232/RS485)
protocol to integrate to SCADA
softwares and HMI.
- Modbus Master protocol (RS485) to
link to other devices which support
Modbus RTU protocol.
- All I-7000 & I-87K series I/O modules
can be integrated as remote I/O modules.
- Controller to Controller Data Exchange
via RS485.
- Support ICP DAS's MMICON - Man
Machine Interface
- Data log: data, date & time can be
stored at X607/X608, and then PC
can load these data via RS232/RS485.
- SMS: When integrating with a GSM Modem,
Short Message Service is available.

Specifications

- CPU: 80188-40 Compatible
- SRAM: 512K bytes
- Flash Memory: 512K bytes
- NVSRAM: 31 bytes
- EEPROM: 2048 bytes
- Real Time Clock
- COM1: RS-232 (5 pins) / RS-485
- COM2: RS-485
- Digital Input channel: 1
- Digital Output channel: 1
- User defined I/O pins: X1~X14
- Operating Temp.: -25°C to +75°C
- Storage Temp.: -40°C to +80°C
- Power requirement: Unregulated
10~30 VDC power
- Power Consumption:
2.0W for I-7188XG;
3.0W for I-7188XGD
- Dimensions:
123mm x 72mm x 33mm

i-7188XC *Expandable Embedded Controller*

SERIES



Ordering Information

- **I-7188XC:**
Embedded Controller
- **I-7188XCD:**
I-7188XC with Display
- Options**
- **PWR-24/110:**
Wall-plug Power Adaptor/110VAC/
60Hz/3.6W
- **PWR-24/220:**
Wall-plug Power Adaptor/220VAC/
50Hz/3.6W
- **PWR-24/230:**
Wall-plug Power Adaptor/230VAC/
50Hz/3.6W
- **X600:**
4 mega bytes Flash memory board
- **X601:**
8 mega bytes Flash memory board
- **X607:**
128K bytes SRAM board
- **X608:**
512K bytes SRAM board

Features

- 80188-20 embedded CPU
(will be upgraded to 40MHz)
- Cost-effective version of I-7188 series
- User defined D/I/O
- COM driver support interrupt & 1K QUEUE input buffer
- COM port: COM1, COM2
- Built-in EEPROM
- Built-in I/O expansion bus
- Can add on one expansion board
- Built-in self-tuner ASIC chip for RS-485 port
- Optional 7-segment LED display
- Built-in ICP DAS's MiniOS7
- Program download port: COM1

Specifications

- CPU: 80188-20™ or compatible
- SRAM: 128K bytes
- Flash Memory: 256K bytes
- EEPROM: 2048 bytes
- COM1: RS-232 (5 pins) / RS-485
- COM2: RS-485
- Digital Input Channels: 3
Logic low level: 0V~1V
Logic high level: 3.5V~30V
- Digital Output Channels: 3
Open collector to 30V Max.
Output current: 100mA
- Operating Temp.: -25°C to +75°C
- Storage Temp.: -40°C to +80°C
- Power requirement: Unregulated 10~30 VDC power
- Power Consumption:
2.0W for I-7188XC;
3.0W for I-7188XCD
- Dimensions:
119mm x 72mm x 33mm



Ordering Information

- IVIEW-100-ISaGRAF:
- IVIEW-100 Handheld Embedded Controller (without ISaGRAF Driver)

Options

- PWR-24/110:
Wall-plug Power Adaptor/110VAC/
60Hz/3.6W
- PWR-24/220:
Wall-plug Power Adaptor/220VAC/
50Hz/3.6W
- PWR-24/230:
Wall-plug Power Adaptor/230VAC/
50Hz/3.6W
- S256:
256K bytes battery backup ram
- S512:
512K bytes battery backup ram
- ISaGRAF-256:
ISaGRAF Workbench Software
up to 256 I/O Tags.

Handheld Embedded Controller

Features


- Include features of I-7188XC.
- Built-in ISaGRAF driver & License
- Programming Languages:
IEC61131-3: LD, ST, FBD, SFC, IL
Flow Chart.
- Modbus RTU(RS232) protocol to integrate to SCADA software and HMI.
- Modbus Master protocol (RS232/RS485) to link to other devices which support Modbus RTU protocol.
- All I-7000 & I-87K series I/O modules can be integrated as remote I/O modules.
- Keypad: Input parameters - Boolean, Number, Real, String, function key are available.
- LCD Display: Text, Number, Real & Boolean Icon can be shown on the LCD.
- Data log: data, alarm, date & time can be stored at S256/S512, and then PC can load these data via RS232
- SMS: When integrating with a GSM Modem, Short Message Service is available.
- Bitmap Background: user can use bitmap files to be backgrounds of the LCD.

Common Specifications

- CPU: 80188-40 Compatible
- SRAM: 512K bytes
- Flash Memory: 512K bytes
- NVSRAM: 31 bytes
- EEPROM: 2048 bytes
- Real Time Clock
- COM1: RS-232 (5 pins)
- COM2: RS-232 (5 pins) / RS-485
- Digital Input Channel: 4
- Digital Output Channel:
2 relay output. (Default) or
4 open collector output (Jumper Selected)
- Display: 128*64 dots, STN, YellowGreen Backlight LCD.
- Full numeric membrane keypad
- One buzzer inside
- Operating Temp.: -25°C to +75°C
- Storage Temp.: -40°C to +80°C
- Power requirement: Unregulated 10~30 VDC power
- Power Consumption: 3.0W
- Dimensions:
181mm X 116mm X 42mm

i-752N Intelligent Communication Controller SERIES

**I-7521/I-7521D/I-7522/I-7522D/I-7522A/I-7522AD/
I-7523/I-7523D/I-7524/I-7524D/I-7527/I-7527D**

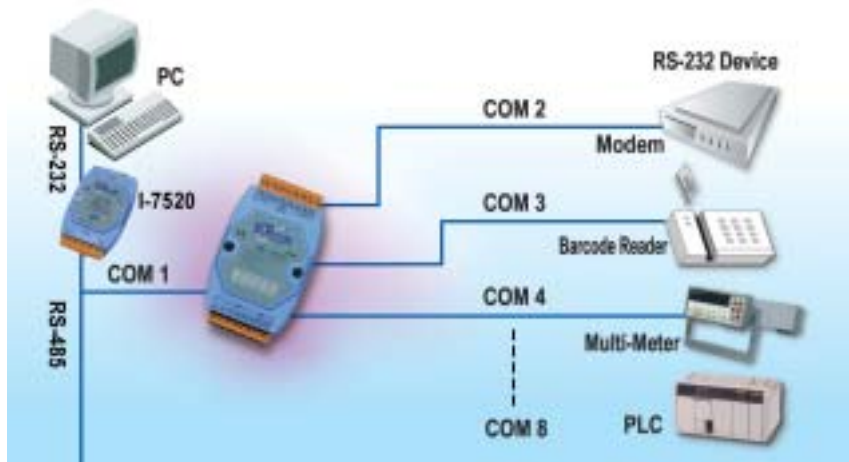

Introduction

There are many RS-232 devices in industry applications. Nowadays it becomes important to link all those RS-232 devices together for automation & information. Usually those RS-232 devices are far away from the host-PC & widely distributed in the factory. So it is not a good idea to use multi-serial cards to connect all these RS-232 devices together. Our I-752N series products can be used to link multiple RS-232 devices using a single RS-485 network. The RS-485 is famous for its easy maintenance, simple cabling, reliability and low cost. When the user wants to connect RS-232 devices to 10BASE T, our I-7188EN series products can meet this demand.

Can be used as an Addressable RS-485 to RS-232 Converter

Basically our I-752N products are Master-type converters. The I-752N uses our R.O.C. Patent 086674. Other competitor's converter are Slave-type and can't work independently without a host-PC. In real industrial application, the demand is different case by case and customers are not satisfied with Slave-type devices. The I-752N is very powerful and can analyse the local RS-232 device, D/I or D/O without a host-PC.

Can be used as an Embedded Controller

Can be used as RS-485 to RS-232 Device Server

The Device Server is an appliance that network enables any device with a serial communication port. Our Intelligent Communication Controllers allow those devices to become connected to the RS-485 network.

Intelligent Communication Controller SERIES

Features

- COM1 of the I-7521, I-7522, I-7522A, I-7523, I-7524 and I-7527 can be used as RS-232 port or RS-485 port
- COM1 can be used to download programs.
- Built-in "Addressable RS-485 to RS-232 Converter" firmware
- Support Dual-Watchdog commands
- Support Power-up value & safe value for D/O
- I-7521 support one RS-232 device
- I-7522 support two RS-232 devices
- I-7522A support one RS-232 and one RS-422 device
- I-7523 support three RS-232 devices
- I-7524 support four RS-232 devices
- I-7527 support seven RS-232 devices
- Watchdog timer provides fault tolerance and recovery
- R.O.C. Invention Patent No. 086674, No. 103060, No. 132457

Specifications

- CPU: 80188; 20MHz; for I-7521/7522/7523
40MHz; for I-7522A/7524/7527
- SRAM: 128K bytes for I-7521/7522/7523
256K bytes for I-7522A/7524/7527
- Flash ROM: 512K bytes for I-7522A/7524/7527
256K bytes for I-7521/7522/7523
- EEPROM: 2048 bytes
- Communication speed: 115.2K bps max.
- RS-232 interface connector: Male DB-9
- RS-485 interface connector for I-7521/7522/7523: 13-pin screw terminal block (accept 16~26 AWG wires); 3.81mm pitch
- D/I: 3.5V~30V
- D/O: 100mA/30V
- Operating temperature: -25°C to +75°C
- Storage temperature: -40°C to +80°C
- Dimensions: 123mm x 72mm x 33mm
- Power requirement: Unregulated 10~30 VDC power
- Power consumption: 2W (without display)/3W (with display)

Applications

- Factory Automation
- Building Automation
- Home Automation

i-752N Intelligent Communication Controller

SERIES

I-752N Communication Controller Selection Guide

Model Number	I-7521/ 7521D	I-7522/ 7522D	I-7522A/ 7522AD	I-7523/ 7523D	I-7524/ 7524D	I-7527/ 7527D
CPU (80188)	20M	20M	40M	20M	40M	40M
SRAM	128K	128K	256K	128K	256K	256K
Flash	256K	256K	512K	256K	512K	512K
COM1 Port Program Download	RS-232/ RS-485 (Note1)	RS-232/ RS-485 (Note1)	RS-232/ RS-485 (Note2)	RS-232/ RS-485 (Note1)	RS-232/ RS-485 (Note2)	RS-232/ RS-485 (Note2)
COM2 Port	RS-485 (Note3)	RS-485 (Note3)	RS-485 (Note3)	RS-485 (Note3)	RS-485 (Note3)	RS-485 (Note3)
COM3 Port	—	RS-232 (Note4)	RS-422 (Note6)	RS-232 (Note4)	RS-232 (Note4)	RS-232 (Note5)
COM4 Port	—	—	—	RS-232 (Note5)	RS-232 (Note4)	RS-232 (Note5)
COM5 Port	—	—	—	—	RS-232 (Note4)	RS-232 (Note5)
COM6 Port	—	—	—	—	—	RS-232 (Note5)
COM7 Port	—	—	—	—	—	RS-232 (Note5)
COM8 Port	—	—	—	—	—	RS-232 (Note5)
D/O	3	1	5	2	1	1
D/I	3	3	5	—	1	1
user Defined I/O	3	—	—	—	—	—
Real Timer Clock	—	—	Y	—	Y	Y
Embedded O.S.	MiniOS7	MiniOS7	MiniOS7	MiniOS7	MiniOS7	MiniOS7
Note1: RS-232/RS-485 RS-485: D1+, D1-; Self-tuner inside RS-232: TXD, RXD, RTS, CTS, GND DB-9 male connector			Note3: RS-485 (D2+, D2-; Self-tuner inside); 3000V isolation Note4: RS-232 (TXD, RXD, RTS, CTS, GND) Note5: RS-232 (TXD, RXD, GND) Note6: RS-422 (RXD3+, RXD3-, TXD3+, TXD3-, GND)			
Note2: RS-232/RS-485 RS-485: D1+, D1-; Self-tuner inside RS-232: TXD, RXD, RTS, CTS, GND						

Ordering Information

- **I-7521:** Intelligent Communication Controller
- **I-7521D:** I-7521 with display
- **I-7522:** Intelligent Communication Controller
- **I-7522D:** I-7522 with display
- **I-7522A:** Intelligent Communication Controller
- **I-7522AD:** I-7522 with display
- **I-7523:** Intelligent Communication Controller
- **I-7523D:** I-7523 with display
- **I-7524:** Intelligent Communication Controller
- **I-7524D:** I-7524 with display
- **I-7527:** Intelligent Communication Controller
- **I-7527D:** I-7527 with display

Options

- **PWR-24/110:** Wall-plug Power Adaptor/110VAC, 60Hz, 3.6W
- **PWR-24/220:** Wall-plug Power Adaptor/220VAC, 50Hz, 3.6W
- **PWR-24/230:** Wall-plug Power Adaptor/230VAC, 50Hz, 3.6W

Palm-size Embedded Internet/ Ethernet Controller

i-7188EX SERIES

I-7188EX/I-7188EXD



Why! Ethernet Solutions

"Embedded Internet" and "Embedded Ethernet" are hot topics today. Nowadays Ethernet protocol has become the de-facto standard for local area networks. Via the Internet, connectivity is occurring everywhere, from home appliances to vending machines to testing equipment to UPS...etc. Many embedded designers now face the dilemma of adding Ethernet interfaces to their products, either for use with local networks or for connecting to the Internet. Solutions to this problem include both hardware and software. Connecting via Ethernet requires a software protocol called TCP/IP. The installed base of Ethernet networks is huge and growing. Most office building, factories, and new homes have installed Ethernet networks. With Ethernet, the network is always available. Using Ethernet for networks in industrial area is appealing because the required cabling is already installed.

Introduction

The I-7188EX is powered by an 80188-40/80186-80(New) processor with 512K bytes of static RAM, and 512K bytes of Flash memory. One serial RS-232 port and one RS-485 port are provided. Ethernet support is provided by a NE-2000 compatible controller with 16K bytes of on-chip buffer memory and 10Base-T media interface. The I-7188EX also provides 14 user defined I/O lines. A cost-effective I/O expansion board with A/D, D/A, relays drivers and protected inputs are available. The I-7188EX also supports battery back-up SRAM board and Flash-Rom board, providing non-volatile mass storage from 128K bytes to 64 megabytes. The 10BASE-T port is equipped with a RJ-45 connector. The 10BASE-T interface supports max. 100-meter Cable length between I-7188EX and the network hub.

TCP/IP Library

The software library supports TCP/IP protocols & web server. Support the following protocols,

- TCP, Transmission Control Protocol
- UDP, User Datagram Protocol
- IP, Internet Protocol
- ICMP, Internet Control Message Protocol
- ARP, Address Resolution Protocol

Features

- 80188-40 embedded CPU
- Supports a variety of TCP/IP features, including TCP, UDP, IP, ICMP, ARP,
- 10BASE-T NE2000 compatible Ethernet Controller
- Reloadable Operating Software
- Remote Configuration, Diagnostics
- 64-bit hardware unique serial number inside
- COM driver support interrupt & 1K QUEUE input buffer
- COM port: COM1, COM2
- Built-in RTC, NVRAM, EEPROM
- User defined I/O lines: 14
- Built-in I/O expansion bus interface
- Built-in self-tuner ASIC chip for RS-485 port
- Built-in MiniOS7
- Program download port: COM1 or Ethernet Port (Available soon)
- **Support Vxcomm technique & Xserver**


Specifications

of I-7188EX & I-7188EXD

- RDC 8820 (40MHz)
- SRAM: 512K bytes (7188EX); 256K bytes (7188EX/256)
- Flash Memory: 512K bytes
- NVSRAM: 31 bytes
- EEPROM: 2048 bytes
- Real Time Clock
- Ethernet port: 10Base-T
- COM1: RS-232—TXD, RXD, RTS, CTS, GND
- COM2: RS-485—D1+, D1-, self-tuner ASIC inside
- User defined I/O pins: 14
- Power requirement: 10 to 30VDC (non-regulated)
- Power consumption: 2.0W for I-7188EX; 3.0W for I-7188EXD
- Dimensions: 123mm x 72mm x 33mm

i-7188EX **Palm-size Embedded Internet/ Ethernet Controller**

SERIES

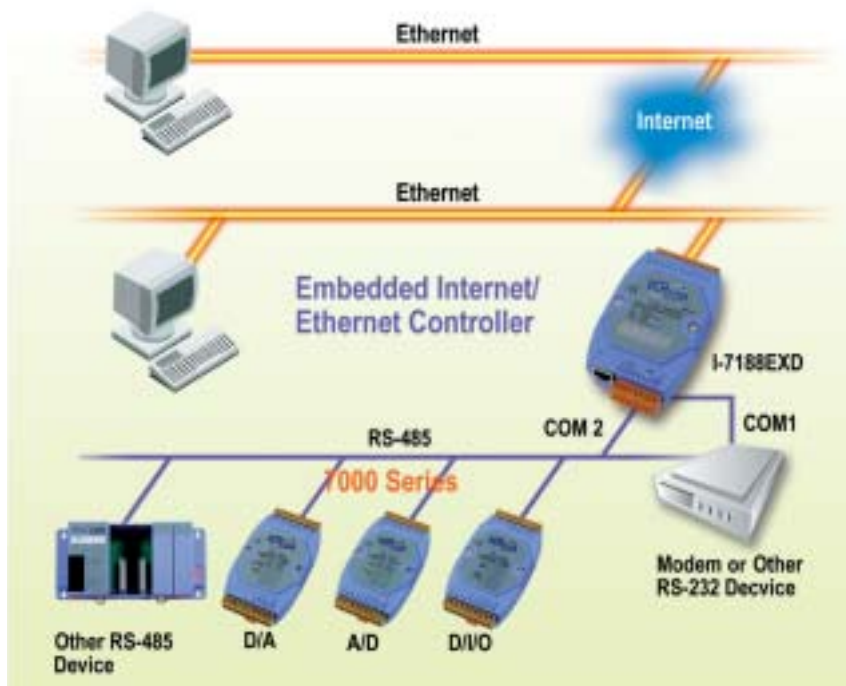

Ordering Information

- **I-7188EX:** I-7188EXD without display
- **I-7188EXD:** Embedded Ethernet/Internet Controller with 7-segment display

OEM Version

- **I-7188EX/256:** I-7188EX-256 without display
- **I-7188EXD/256:** I-7188EXD with 512k bytes Flash and 256k bytes SRAM

Power Supply Options:

- **PWR-24/110:** Wall-plug Power Adapter/110VAC, 60Hz, 3.6W
- **PWR-24/220:** Wall-plug power Adapter/220VAC, 50Hz, 3.6W
- **PWR-24/230:** Wall-plug power Adapter/230VAC, 50Hz, 3.6W
- **DIN-KA52F:** 1.05 Amp. DIN-Rail Mounting Power supply

Add-on Options:

- **X600:** 4-Mega Bytes NAND Flash memory expansion board
- **X601:** 8-Mega Bytes NAND Flash memory expansion board
- **X607:** 128K bytes SRAM expansion board
- **X608:** 512K bytes SRAM expansion board

i-7188 Modbus/TCP Embedded Controller SERIES



Default firmware features

- Converts single Modbus/TCP to multi Modbus/RTU
- Supports VxComm technique for every COM port of controllers
- Allowed multi-client (or master) access simultaneously
- Firmware modifiable



Modbus SDK (in C language)

If the default firmware doesn't totally suit your requirement. You can use the Modbus SDK to modify the default firmware to add extra functions. The Modbus SDK has below features:

- Supports extra user-defined command protocol (TCP/IP)
- Register based programming method (easy to use)
- Provides user-defined registers
- Can link to Modbus/RTU slave devices
- Can link to non-Modbus/RTU serial devices
- Supports X boards
- Xserver SDK compatible

Hardware specifications

Same as I-7188EX, I-7188EXD

Ordering Information

- **I-7188EX -MTCP:** Modbus/TCP embedded controller
- **I-7188EXD -MTCP:** Modbus/TCP embedded controller (with LED display)



Ordering Information

- **I-7188EA:**
Embedded Internet/Ethernet Controller
- **I-7188EAD:**
I-7188EA with Display

Options

- **PWR-24/110:**
Wall-plug Power Adaptor/110VAC, 60Hz, 3.6W
- **PWR-24/220:**
Wall-plug Power Adaptor/220VAC, 50Hz, 3.6W
- **PWR-24/230:**
Wall-plug Power Adaptor/230VAC, 50Hz, 3.6W

Introduction

Compared to I-7188EX, the I-7188EA adds seven open-collector output channels and six digital Input channels. I/O Expansion bus has been occupied by DI/O expansion board.

Features

- 80188-40 embedded CPU
- 10BASE-T Ethernet Controller, NE2000 compatible
- 64-bit hardware unique serial number inside
- COM port: COM1, COM2
- Built-in RTC, NVRAM, EEPROM
- DI: 6 / DO: 7
- Built-in self-tuner ASIC chip
- Built-in MiniOS7
- TCP/IP
- Built-in RTC, NVRAM, EEPROM
- Program download port: COM1
- **Support Vxcomm technique & Xserver**

Specifications

of I-7188EA & I-7188EAD

- CPU: 80188-40
- SRAM: 512K bytes
- Flash Memory: 512K bytes
- NVSRAM: 31 bytes
- EEPROM: 2048 bytes
- Digital Input channels: 6
Logic low level: 0V~1V
Logic high level: 3.5V~30V
- Digital Output channels: 7
Open collector to 30V Max.
Output current: 100mA
- Real Time Colock
- COM1: RS-232
- COM2: RS-485
- Power requirement:
10~30VDC (non-regulated)
- Power consumption:
2.0W for I-7188EA;
3.0W for I-7188EAD
- Dimensions: 123mm x 72mm x 33mm

i-7188EG *Expandable ISaGRAF Embedded Controller*

SERIES



Ordering Information

- **I-7188EG:**
Expandable ISaGRAF Embedded Controller
- **I-7188EGD:**
Expandable ISaGRAF Embedded Controller with Display

Power Supply Options:

- **PWR-24/110:** Wall-plug Power Adapter/110VAC, 60Hz, 3.6W
- **PWR-24/220:** Wall-plug power Adapter/220VAC, 50Hz, 3.6W
- **PWR-24/230:** Wall-plug power Adapter/230VAC, 50Hz, 3.6W
- **DIN-KA52F:** 1.05 Amp. DIN-Rail Mounting Power supply

Add-on Options:

- **X600:** 4-Mega Bytes NAND Flash memory expansion board
- **X601:** 8 Mega Bytes NAND Flash memory expansion board
- **X607:** 128K bytes SRAM expansion board
- **X608:** 512K bytes SRAM expansion board
- **ISaGRAF-256:**
ISaGRAF Workbench Software up to 256 I/O Tags.

Introduction

Compared to I-7188EX, the I-7188EG has the ISaGRAF driver embedded inside.

Features


- Include features of I-7188EX
- Built-in ISaGRAF driver & License
- Programming Languages: IEC61131-3: LD, ST, FBD, SFC, IL Flow Chart.
- Modbus RTU (RS232) and Modbus TCP/IP (Ethernet) protocol to integrate to SCADA softwares and HMI.
- Modbus Master protocol (RS485) to link to other devices which support Modbus RTU protocol.
- All I-7000 & I-87K series I/O modules can be integrated as remote I/O modules.
- Controller to Controller Data Exchange via Ethernet & RS485.
- Support ICP DAS's MMICON - Man Machine Interface
- Data log: data, date & time can be stored at X607/X608, and then PC can load these data via RS232 & Ethernet.
- SMS: When integrating with a GSM Modem, Short Message Service is available.

Specifications

- CPU: 80188 40MHz
- SRAM: 512K bytes
- Flash Memory: 512K bytes
- NVSRAM: 31 bytes
- EEPROM: 2048 bytes
- Real Time Clock
- Ethernet port: 10Base-T
- COM1: RS-232—TXD, RXD, RTS, CTS, GND
- COM2: RS-485—D1+, D1-, self-tuner ASIC inside
- User defined I/O pins: 14
- Power requirement: 10 to 30VDC (non-regulated)
- Power consumption: 2.0W for I-7188EG; 3.0W for I-7188EGD
- Dimensions: 123mm x 72mm x 33mm

i-7188EN Internet Communication Controller

SERIES

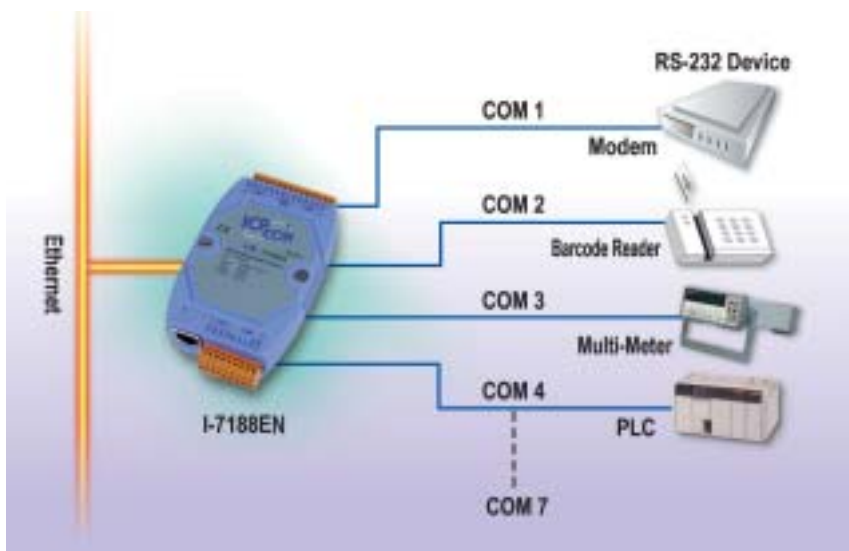

Introduction

The I-7188EX, Embedded Internet/Ethernet Controller, focuses on embedded control applications while the I-7188EN, Internet Communication Controller, focuses on communication applications. According to different embedded firmware program, the Internet Communication Controller can be used as Device Server or Addressable Ethernet to RS-232/485/422 Converter or Embedded Internet/Ethernet Controller. The user should refer to comparison table to choose the optimal product. Now we offer a wide range of Internet Communication Controllers, such as I-7188E1/E2/E3/E4/E5/E8. Except for the RTC circuitry, the basic hardware of the I-7188EN is similar to the I-7188EX. Since there are too many Configurations for the I-7188EN series product, an OEM or ODM version is welcomed.

Features

- 80188-40 embedded CPU / 80186-80(New)
- Supports a variety of TCP/IP features, including TCP, UDP, IP, ICMP, ARP
- 10BASE-T NE2000 compatible Ethernet Controller
- Reloadable Operating Software
- Remote Configuration; Diagnostics
- COM driver support interrupt & 1K QUEUE input buffer
- Support serial port
- Built-in EEPROM

i-7188EN Internet Communication Controller

SERIES

Features

- Built-in self-tuner ASIC chip for RS-485 port
- I-7188E1 support one RS-232 port
- I-7188E2 support one RS-232 port and one RS-485 port
- I-7188E3 support one RS-232 port, one RS-485 port one RS-422/485 port and serveral DI/O lines
- I-7188E3-232 support two RS-232 ports, one RS-485 port and serveral DI/O lines
- I-7188E4 support three RS-232 ports and one RS-485 port
- I-7188E5 support four RS-232 ports and one RS-485 port
- I-7188E5-485 support one RS-232 port and four RS-485 ports
- I-7188E8 support seven RS-232 ports and one RS-485 port
- 7-segment LED display for I-7188END
- Built-in MiniOS7
- Program download port: COM1 or Ethernet Port (Available soon)
- **Support Vxcomm technique & Xserver**

Specifications

- CPU: 80188 40MHz
- SRAM: 256K bytes
- Flash Memory: 512K bytes
- EEPROM: 2048 bytes.
- Ethernet port: 10Base-T
- U.S patent NO.6,401,159 B1
- R.O.C. Invention Patent No. 086674, No. 103060, No. 132457
- RS-485 interface connector for I-7524/7527: 14-pin screw terminal block (accepts 16~22 AWG wires); 3.5mm pitch
- D/I: 3.5V~30V
- D/O: 100mA/30V
- Operating temperature: -25°C to +75°C
- Storage temperature: -40°C to +80°C
- Dimensions: 123mm x 72mm x 33mm
- Power requirement: Unregulated 10~30 VDC power
- Power consumption: 2W (without display); 3W (with display)

Applications

- Factory Automation
- Building Automation
- Home Automation

i-7188EN Internet Communication Controller SERIES

Internet Communication Controller Selection Guide

Model Number	I-7188E1	I-7188E2	I-7188E3	I-7188E3-232	I-7188E4	I-7188E5	I-7188E5-485	I-7188E8
CPU (80188)	40M	40M	40M	40M	40M	40M	40M	40M
SRAM	256K	256K	256K	256K	256K	256K	256K	256K
Flash	512K	512K	512K	512K	512K	512K	512K	512K
Ethernet Port	10 BaseT	10 BaseT	10 BaseT	10 BaseT	10 BaseT	10 BaseT	10 BaseT	10 BaseT
COM1 Port	RS-232/ (Note1)	RS-232/ (Note1)	RS-232/ (Note1)	RS-232/ (Note1)	RS-232/ (Note1)	RS-232/ (Note1)	RS-232/ (Note1)	RS-232/ (Note1)
COM2 Port	—	RS-485 (Note3)	RS-485 (Note3)	RS-485 (Note3)	RS-485 (Note3)	RS-485 (Note3)	RS-485 (Note3)	RS-485 (Note3)
COM3 Port	—	—	RS-422 (Note5)	RS-232 (Note1)	RS-232 (Note1)	RS-232 (Note1)	RS-485 (Note3)	RS-232 (Note2)
COM4 Port	—	—	—	—	RS-232 (Note4)	RS-232 (Note1)	RS-485 (Note3)	RS-232 (Note2)
COM5 Port	—	—	—	—	—	RS-232 (Note1)	RS-485 (Note3)	RS-232 (Note2)
COM6 Port	—	—	—	—	—	—	—	RS-232 (Note2)
COM7 Port	—	—	—	—	—	—	—	RS-232 (Note2)
COM8 Port	—	—	—	—	—	—	—	RS-232 (Note2)
DI	—	—	4	4	—	—	—	—
DO	—	—	4	4	—	—	—	—
RTC	N	N	N	N	N	N	N	N
Embedded O.S.	MiniOS7	MiniOS7	MiniOS7	MiniOS7	MiniOS7	MiniOS7	MiniOS7	MiniOS7

Note1: RS-232, TXD, RXD, RTS, CTS, GND

Note2: RS-232, TXD, RXD, GND

Note3: RS-485, D2+, D2-; Self-tuner inside

Note4: RS-232, TXD, RXD, RTS, CTS, GND, DCD, DTR, DSR, RI

Note5: RS-422, TXD+, TXD-, RXD+, RXD-

Ordering Information


- **I-7188E1:** Internet Communication Controller
- **I-7188E1D:** I-7188E1 with seven-segment display
- **I-7188E2:** Internet Communication Controller
- **I-7188E2D:** I-7188E2 with seven-segment display
- **I-7188E3:** Internet Communication Controller
- **I-7188E3D:** I-7188E3 with seven-segment display
- **I-7188E3-232:** Internet Communication Controller
- **I-7188E3D-232:** I-7188E3-232 with display
- **I-7188E4:** Internet Communication Controller
- **I-7188E4D:** I-7188E4 with seven-segment display
- **I-7188E5:** Internet Communication Controller
- **I-7188E5D:** I-7188E5 with display
- **I-7188E5-485:** Internet Communication Controller
- **I-7188E5D-485:** I-7188E5-485 with display
- **I-7188E8:** Internet Communication Controller
- **I-7188E8D:** I-7188E8 with display

Options

- **PWR-24/110:**
Wall-plug Power Adaptor/
110VAC, 60Hz, 3.6W
- **PWR-24/220:**
Wall-plug Power Adaptor/
220VAC, 50Hz, 3.6W
- **PWR-24/230:**
Wall-plug Power Adaptor/
230VAC, 50Hz, 3.6W

i-7188 I/O Expansion Boards

SERIES

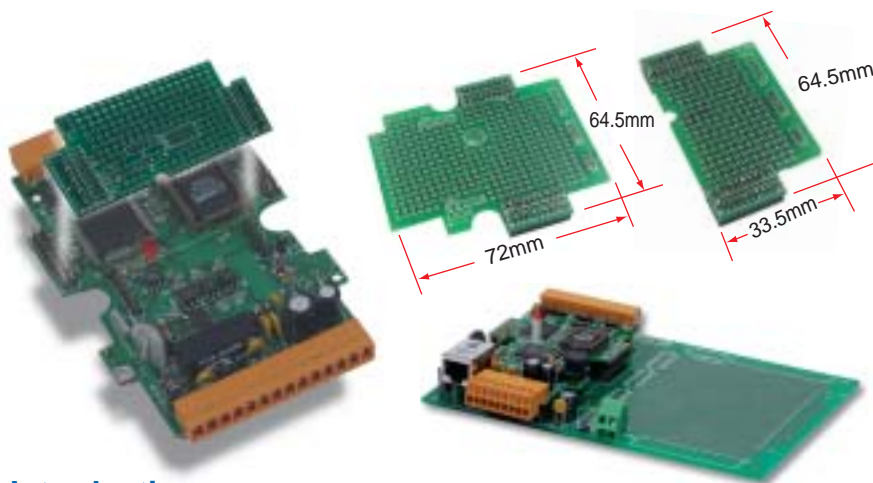

Introduction

I/O Expansion Bus and Expansion Boards

I-7188XA, I-7188XB, I-7188XC, and I-7188EX support an I/O expansion bus. The I/O expansion bus can be used to implement various I/O functions such as D/I, D/O, A/D, D/A, Timer/Counter, UART, flash memory, battery backup SRAM, AsicKey & other I/O functions. Nearly all kinds of I/O functions can be implemented by this bus. The user can choose our I/O expansion boards or design their own I/O expansion boards. If the user chooses a small size I/O expansion board, then they can mount this I/O expansion board directly onto the I-7188XC controller. Customized I/O Expansion Boards can be ordered through ODM project.

Pin-Assignment of I/O Expansion Bus

J1				J2			
GND	1	2	GND	MA0	1	2	AD0
CLROUTA	3	4	ARDY	MA1	3	4	AD1
INT0	5	6	INT 1	MA2	5	6	AD2
VCC	7	8	RESET	MA3	7	8	AD3
GND	9	10	RESET\	MA4	9	10	AD4
TO 0	11	12	TO 1	MA5	11	12	AD5
TI 0	13	14	TI 1	MA6	13	14	AD6
SCLK	15	16	DIO9	MA7	15	16	AD7(or NC)
DIO4	17	18	DIO14	INT4(or NC)	17	18	WRITE\
VCC	19	20	VCC	CS\	19	20	READ\

CON20A
JDIP20P

CON20A
JDIP20P

i-7188 I/O Expansion Boards

SERIES

I/O Expansion Board Selection Guide

I/O Expansion Board for Prototype, Testing

Model	Description	Size	Used with I-7188XA/XB/XC/EX
X000	Photo type (Small size)	64mm x 32mm	XA/XC
X001	Photo type (Large size)	64mm x 70mm	XA/XC
X002	Photo type	114mm x 170mm	XA/XCXB/EX/XG/EG
X003	Self-test	64mm x 32mm	XA/XC
X004	Self-test	64mm x 36mm	XB/EX/XG/EG
X005	Photo type (Small size)	64mm x 36mm	XB/EX/XG/EG
X006	Photo type (Large size)	72mm x 65mm	XB/EX/XG/EG

I/O Expansion Board for D/I, D/O, Timer/Counter, PWM

Model	Description	D/I	D/O	Relay Output	Counter/ Timer	Used with I-7188XA/ XB/XC/EX
X100	DI	8	—	—	—	XC
X101	DO	—	8	—	—	XC
X102	Relay Output	—	—	2	—	XC
X103	DI	7	—	—	—	XC
X104	DI, DO	8 (each channel can be programmed to DI/DO)		—	—	XC
X105	DI, DO	8 (each channel can be programmed to DI/DO)		—	—	XC
X106	DI, DO	Can be used as 2 channels DO or 3 channels DI		—	—	XC
X107	DI, DO	6	7	—	—	XB/EX/XG/EG
X108	PWM	2 Channels PWM		—	—	XC
X109	Photo MOS	—	—	7	—	XB/EX/XG/EG
X110	DI	14	—	—	—	XB/EX/XG/EG
X111	DO	—	13	—	—	XB/EX/XG/EG
X119	Timer/Counter	7	7	—	—	XC/XA/XB/ EX/EG/XG
		Without Case				
X400	DI, DO	—	—	—	3 channels 16-bit timer/ counter	XA

I/O Expansion Board for A/D, D/A, DI, DO

Model	Description	D/I	D/O	A/D Channels	Input Range	D/A Channels	Output Range	Used with I-7188XA/ XB/XC/EX
X200	A/D	—	—	1	0~2.5V	—	—	XC
X201	A/D	—	—	4	0~20mA	—	—	XC
X202	A/D	—	—	7	0~20mA	—	—	XB/EX/XG/EG
X203	A/D, DI, DO	2	5	2	0~20mA	—	—	XB/EX/XG/EG
X300	D/A	—	—	—	—	2	0~4.095V	XC
X301	A/D, D/A	—	—	1	0~2.5V	1	0~4.095V	XC
X302	A/D, D/A	—	—	1	+/-5V	1	+/-5V	XC
X303	A/D, D/A, DI, DO	4	6	1	+/-5V	1	+/-5V	XB/EX/XG/EG
X304	A/D, D/A, DI, DO	4	4	3	+/-5V	1	+/-5V	XB/EX/XG/EG
X305	A/D, D/A, DI, DO	2	2	7	+/-5V	1	+/-5V	XB/EX/XG/EG
X306	A/D, D/A	—	—	2	+/-10V	—	—	XC
X307	A/D, D/A	2	2	8	+/-10V	—	—	XB/EX/XG/EG
X308	A/D, DO	—	6	4	0~10V	—	—	XB/EX/XG/EG
X310	A/D, D/A, DI, DO	3	3	2	0~20mA /0~10V	2	0~10V	XB/EX/XG/EG

i-7188 I/O Expansion Boards

SERIES

I/O Expansion Board Selection Guide

I/O Expansion Board for RS-232/422/485, DI, DO

Model	Description	DI	DO	Channels	Communication Speed	Used with I-7188XA/XB/XC/EX
X500	RS-232	—	—	One channel (9-wire) ** Without Case **	115.2K	XA/XC
X501	RS-232	—	—	One channel (5-wire)	115.2K	XC
X502	RS-232	—	—	One channel (3-wire), and one channel (5-wire)	115.2K	XC
X503	RS-232	—	—	One channel (5-wire)	115.2K	XB/EX/XG/EG
X504	RS-232	—	—	One channel (5-wire), and one channel (9-wire)	115.2K	XB/EX/XG/EG
X505	RS-232	—	—	Three channels (5-wire)	115.2K	XB/EX/XG/EG
X506	RS-232	—	—	Six channels (3-wire)	115.2K	XB/EX/XG/EG
X507	RS-422	4	4	One channel (TxD+, TxD-, RxD+, RxD-)	115.2K	XB/EX/XG/EG
X508	RS-232	4	4	One channel (5-wire)	115.2K	XB/EX/XG/EG
X509	RS-232	4	4	Two channels (3-wire)	115.2K	XB/EX/XG/EG
X510	RS-232	5	5	One channel (3-wire), and EEPROM: 128K*2 bytes	115.2K	XB/EX/XG/EG
X511	RS-485	—	—	Three channels (Data+, Data-)	115.2K	XB/EX/XG/EG
X513	RS-485	—	—	Six channels	115.2K	XB/EX/XG/EG
X516	RS-232/485	—	—	One channel RS-485 Three channels RS-232 (3-wire)	115.2K	XB/EX/XG/EG
X560	RS-232	—	—	Three channels (3-wire), and 8M bytes NAND Flash ** Without Case **	115.2K	XA/XC/XB/EX /XG/EG

Memory Expansion Boards

Model	Description	Flash Disk	Battery Backup SRAM Disk	Used with I-7188XA/XB/XC/EX
X600	Flash ROM Expansion Board	4M bytes NAND Flash	—	XA/XC/XB/EX/XG/EG
X601	Flash ROM Expansion Board	8M bytes NAND Flash	—	XA/XC/XB/EX/XG/EG
X607	Battery backup SRAM Board	—	128K Bytes	XA/XC/XB/EX/XG/EG
X608	Battery backup SRAM Board	—	512K Bytes	XA/XC/XB/EX/XG/EG

i-7188 I/O Expansion Boards

SERIES

Used with I-7188XB

Used with I-7188EX

Used with I-7188XG

Used with I-7188EG



**Prototype Board
X002** (114mm x 170mm)




**Self-test Board
X004** (64mm x 38mm); 0.2W



Note: Used with I-7188XB/EX/XG/EG

**Prototype Board
X005** (38mm x 64mm)



Note: Used with I-7188XB/EX/XG/EG

**Prototype Board
X006** (72mm x 65mm)



Note: Used with I-7188XB/EX/XG/EG

**DI/O Board
X107** (64mm x 38mm); 0.3W



Specifications:
 ■ 7 channels Open collector output; 30V/100mA
 ■ 6 channels DI (3.5V~30V)
 Note: Used with I-7188XB/EX/XG/EG

**PhotoMos Board
X109** (64mm x 38mm); 0.4W



Specifications:
 ■ Channels: 7 (Form A)
 ■ Continuous load current: 120mA (peak AC)
 ■ Peak load current: 0.3A
 ■ Output Power dissipation: 0.3W
 ■ Output Off state leakage current: 1uA
 ■ Output On resistance: 250hm
 ■ Load voltage: 350V(peak AC)
 ■ Input / Output Isolation: 1,500V AC
 Note: Used with I-7188XB/EX/XG/EG

**DI Board
X110** (64mm x 38mm); 0.3W



Specifications:
 ■ Channel: 14
 ■ Input Range/Type: Logic high level (3.5V~30V), Logic low level (0V~1V)
 Note: Used with I-7188XB/EX/XG/EG

**DO Board
X111** (64mm x 38mm); 0.3W



Specifications:
 ■ Channel: 13
 ■ Open-collector Output: 100 mA / 30V max
 ■ Isolated: none
 Note: Used with I-7188XB/EX/XG/EG

**DI/O Board
X119** (72mm x 65mm); 0.5W

****Without Case****



Specifications:
 ■ 7 Channels: DO
 ■ 7 Channels: DI
 Note: Used with I-7188XB/EX/XG/EG XCVXA

**AD Board
X202** (64mm x 38mm); 0.7W



Specifications:
 ■ Channel: 7
 ■ Resolution: 12bit
 ■ Input Range/Type: 0 ~ 20 mA
 Note: Used with I-7188XB/EX/XG/EG

**AD Board
X203** (64mm x 38mm); 0.7W



Specifications:
 ■ Channel: 2
 ■ Resolution: 12bit
 ■ Input Range/Type: 0 ~ 20 mA
 ■ 2 channels DI
 ■ 6 channels DO
 Note: Used with I-7188XB/EX/XG/EG

**AD, DA Board
X303** (64mm x 38mm); 0.9W



Specifications:
 ■ One channel A/D, 12-bit
 Input Range: +/- 5 V
 ■ One channel D/A, 12-bit
 Output Range: +/- 5 V
 ■ 4 channels DI
 ■ 6 channels DO
 Note: Used with I-7188XB/EX/XG/EG

**AD Board
X304** (64mm x 38mm); 0.9W



Specifications:
 ■ 3 channels AD
 Resolution: 12bit
 Input Range/Type: +/- 5 V
 ■ 1 channel DA
 Resolution: 12bit
 Output Range/Type: +/- 5 V
 ■ 4 channels DI
 ■ 4 channels DO
 Note: Used with I-7188XB/EX/XG/EG

**AD Board
X305** (64mm x 38mm); 0.9W



Specifications:
 ■ 7 channels AD
 Resolution: 12bit
 Input Range/Type: +/- 5 V
 ■ 1 channel DA
 Resolution: 12bit
 Output Range/Type: +/- 5 V
 ■ 2 channels DI
 ■ 2 channels DO
 Note: Used with I-7188XB/EX/XG/EG

i-7188 I/O Expansion Boards

SERIES

AD Board X307 (64mm x 38mm); 0.5W



Specifications:

- 8 channels
- Resolution : 12bit
- Input Range/Type : +/- 10 V
- 2 channels DI
- 4 channels DO

Note:Used with I-7188XBIEIXGIEG

AD Board X308 (64mm x 38mm); 0.8W



Specifications:

- 4 channels AD
- Resolution : 12bit
- Input Range/Type : 0~10V
- 6 channels DO

Note:Used with I-7188XBIEIXGIEG

AD Board X310 (64mmX38mm); 0.9W



Specifications:

- 2 channels AD
- Resolution : 12bit
- Input Range/Type : CH0:0~20 mA; CH1:0~10 V
- 2 channels DA
- Resolution : 12bit
- Output Range/Type:0~10 V
- 2 channels DI
- 2 channels DO

Note:Used with I-7188XBIEIXGIEG

RS-232 Board X503 (64mm x 32mm); 0.6W



Specifications:

- COM3: RS-232 port: CTS3, RTS3, RXD3, TXD3

Note:Used with I-7188XBIEIXGIEG

RS-232 Board X504 (64mm x 38mm); 0.7W



Specifications:

- COM3: RS-232 port: CTS3, RTS3, RXD3, TXD3
- COM4: RS-232 port: RI4, CTS4, RTS4, DSR4, DTR4, TXD4, RXD4, DCD4

Note:Used with I-7188XBIEIXGIEG

RS-232 Board X505 (64mm x 38mm); 0.7W



Specifications:

- COM3: RS-232 port: CTS3, RTS3, RXD3, TXD3
- COM4: RS-232 port: CTS4, RTS4, RXD4, TXD4
- COM5: RS-232 port: CTS5, RTS5, RXD5, TXD5

Note:Used with I-7188XBIEIXGIEG

RS-232 Board X506 (64mm x 38mm); 0.8W



Specifications:

- COM3: RS-232 port: RXD3, TXD3, GND
- COM4: RS-232 port: RXD4, TXD4, GND
- COM5: RS-232 port: RXD5, TXD5, GND
- COM6: RS-232 port: RXD6, TXD6, GND
- COM7: RS-232 port: RXD7, TXD7, GND
- COM8: RS-232 port: RXD8, TXD8, GND

Note:Used with I-7188XBIEIXGIEG

RS-422 Board X507 (64mm x 38mm); 0.7W



Specifications:

- COM3: RS-422 port: RXD3+, RXD3-, TXD3+, TXD3-
- 4 channels DI
- 4 channels DO

Note:Used with I-7188XBIEIXGIEG

RS-232 Board X508 (64mm x 38mm); 0.7W



Specifications:

- COM3: RS-232 port: TXD, RXD, RTS, CTS, GND
- 4 channels DI
- 4 channels DO

Note:Used with I-7188XBIEIXGIEG

RS-232 Board X509 (64mm x 38mm); 0.7W



Specifications:

- COM3: RS-232 port: TXD, RXD, GND
- COM4: RS-232 port: TXD, RXD, GND
- 4 channels DI
- 4 channels DO

Note:Used with I-7188XBIEIXGIEG

RS-232 Board X510 (64mm x 38mm); 0.7W



Specifications:

- COM3: RS-232 port: TXD, RXD, GND
- 5 channels DI
- 5 channels DO
- EEPROM: 128K x 2 bytes

Note:Used with I-7188XBIEIXGIEG

RS-485 Board X511 (64mm x 32mm); 0.8W



Specifications:

- COM3: RS-485 port: Data+, Data-
- COM4: RS-485 port: Data+, Data-
- COM5: RS-485 port: Data+, Data-

Note:Used with I-7188XBIEIXGIEG

RS-485 Board X513 (72mm x 65mm); 0.8W



Specifications:

- 6 Ports : RS-485
- COM3: RS-485 port: Data+, Data-
- COM4: Data+, Data-
- COM5: Data+, Data-
- COM6: Data+, Data-
- COM7: Data+, Data-
- COM8: Data+, Data-

Note:Used with I-7188XBIEIXGIEG

RS-485 Board X516 (64mm x 36mm); 0.8W



Specifications:

- 2 channels AD
- Resolution : 12bit
- Input Range/Type : CH0:0~20 mA; CH1:0~10 V
- 2 channels DA
- Resolution : 12bit
- Output Range/Type:0~10 V
- 2 channels DI
- 2 channels DO

Note:Used with I-7188XBIEIXGIEG

RS-232 Board **Without Case** X560 (72mm x 65mm); 0.7W



Specifications:

- COM3: RS-232 port: RXD3, TXD3, GND
- COM4: RS-232 port: RXD3, TXD3, GND
- COM5: RS-232 port: RXD3, TXD3, GND
- 8M bytes NAND Flash:
- Endurance : 1,000,000
- Program/Erase Cycles
- Data Retention : 10 years

i-7188 I/O Expansion Boards

SERIES

Flash Memory Board X600/X601 (64mm x 32mm)



Specifications:

- X600: 4M bytes NAND; Flash: 0.3W
- X601: 8M bytes NAND; Flash: 0.4W
- Endurance: 1,000,000 Program/Erase Cycles
- Data Retention: 10 years

Note: Used with I-7188XA\XB\XC\XE\XG\IEG

Battery Backup SRAM Board X607 (64mm x 32mm); 0.5W



Specifications:

- SRAM: 128K Bytes

Note: Used with I-7188XB\IE\XG\IEG\XC\XA

Battery Backup SRAM Board X608 (64mm x 32mm); 0.6W



Specifications:

- SRAM: 512K Bytes

Note: Used with I-7188XA\XB\XC\XE\XG\IEG

Used with I-7188XC



Prototype Board X000 (64mm x 32mm)



Prototype Board X001 (64mm x 70mm)



Self-test Board X003 (64mm x 32mm); 0.2W



D/I/O Board X100 (64mm x 32mm); 0.3W



Specifications:

- 8 D/I channels
- Input voltage range: 3.5V~30V

Note: Used with I-7188XC only

D/I/O Board X101 (64mm x 32mm); 0.4W



Specifications:

- 8 D/I channels
- Type: TTL Level
- Sink current: 64mA

Note: Used with I-7188XC only

Relay Board X102 (64mm x 32mm); 0.5W



Specifications:

- 2-channel relay output
- Contact rating: 0.5A/125VAC; 1A/30VDC

Note: Used with I-7188XC only

D/I/O Board X103 (64mm x 32mm); 0.3W



Specifications:

- 7 isolated D/I channels
- Input voltage range: 3.5V~30V

Note: Used with I-7188XC only

D/I/O Board X104 (64mm x 32mm); 0.2W



Specifications:

- 8 D/I channels
- Each channel can be programmed to D/I or D/O
- Non-isolated, TTL level

Note: Used with I-7188XC only

D/I/O Board X105 (64mm x 32mm); 0.4W



Specifications:

- 8 channel D/I/O
- 8 channel programmable
- Non-isolated, TTL level

Note: Used with I-7188XC only

i-7188 I/O Expansion Boards

SERIES

DI/O Board

X106(64mm x 32mm); 0.3W



Specifications:

- 2 channels Open collector output: 30V/250mA or 3 channels DI (3.5V~30V)
- Note: Used with I-7188XC only

DA Board

X300(64mm x 32mm); 0.3W



Specifications:

- Channel : 2
- Output Range: 0~4.095V, 12-bit
- Note: Used with I-7188XC only

Timer/Counter Board

X400(64mm x 32mm); 0.3W



Specifications:

- 3channels 16-bit timer/counter
- Note: Used with I-7188XC only

RS-232 Board ***Without Case***

X560(72mm x 65mm); 0.7W



Specifications:

- COM3: RS-232 port: RXD3, TXD3, GND
- COM4: RS-232 port: RXD3, TXD3, GND
- COM5: RS-232 port: RXD3, TXD3, GND
- 8M bytes NAND Flash:
- Endurance : 1,000,000
- Program/Erase Cycles
- Data Retention : 10 years

DI/D Board

X119(72mm x 65mm); 0.5W



Specifications:

- 7 Channels : DO
- 7 Channels : DI

AD, DA Board

X301(64mm x 32mm); 0.5W



Specifications:

- One channel AD, 12-bit
- Input Range: 0~2.5V
- One channel DA, 12-bit
- Output Range: 0~4.095V
- Note: Used with I-7188XC only

RS-232 Board

X500(64mm x 38mm); 0.4W



Without Case

Specifications:

- COM: RS-232 port: RI4, CTS4, RTS4, DSR4, TXD4, RXD4, DCD4, DTR4
- Note: Used with I-7188XC1XA

Flash Memory Board

X600/X601(64mm x 32mm)



Specifications:

- X600: 4M bytes NAND; Flash: 0.3W
- X601: 8M bytes NAND; Flash: 0.4W
- Endurance: 1,000,000 Program/Erase Cycles
- Data Retention: 10 years
- Note: Used with I-7188XA1XB1XC1EX1G1EG

A/D Board

X200(64mm x 32mm); 0.3W



Specifications:

- Channel : 1
- Input Range: 0~2.5V, 12-bit

AD, DA Board

X302(64mm x 32mm); 0.9W



Specifications:

- One channel AD, 12-bit
- Input Range: +/- 5 V
- One channel DA, 12-bit
- Output Range: +/- 5 V
- Note: Used with I-7188XC only

RS-232 Board

X501(64mm x 32mm); 0.4W



Specifications:

- COM3: RS-232 port: CTS3, RTS3, RXD3, TXD3
- Note: Used with I-7188XC only

Battery Backup SRAM Board

X607(64mm x 32mm); 0.5W



Specifications:

- SRAM: 128K Bytes

AD Board

X201(64mm x 32mm); 0.7W



Specifications:

- Channel : 4
- Resolution : 12bit
- Input Range/Type : 0 ~ 20 mA
- Note: Used with I-7188XC only

AD Board

X306(64mm x 32mm); 0.5W



Specifications:

- 2 channels AD
- Resolution : 12bit
- Input Range/Type : +/- 10 V
- Note: Used with I-7188XC only

RS-232 Board

X502(64mm x 32mm); 0.6W



Specifications:

- COM3: RS-232 port: CTS3, RTS3, RXD3, TXD3
- COM4: RS-232 port: RXD4, TXD4
- Note: Used with I-7188XC only

Battery Backup SRAM Board

X608(64mm x 32mm); 0.6W



Specifications:

- SRAM: 512K Bytes
- Note: Used with I-7188XA1XB1XC1EX1G1EG

i-7188 I/O Expansion Boards

SERIES

Used with I-7188XA



Prototype Board
X000 (64mm x 32mm)



Prototype Board
X001 (64mm x 70mm)



Self-test Board
X003 (64mm x 32mm); 0.2W



Note: Used with I-7188XBIEXXGIEG

D/I/O Board **Without Case**
X119 (72mm x 65mm); 0.5W



Specifications:
■ 7 Channels : DO
■ 7 Channels : DI

Note: Used with I-7188XBIEXXGIEGXCA

RS-232 Board **Without Case**
X500 (64mm x 38mm); 0.4W



Specifications:
■ COM: RS-232 port: RI4, CTS4, RTS4, DSR4, TXD4, RXD4, DCD4, DTR4
Note: Used with I-7188XCIXA

RS-232 Board **Without Case**
X560 (72mm x 65mm); 0.7W



Specifications:
■ COM3 : RS-232 port: RXD3, TXD3, GND
■ COM4 : RS-232 port: RXD3, TXD3, GND
■ COM5 : RS-232 port: RXD3, TXD3, GND
■ 8M bytes NAND Flash:
Endurance : 1,000,000
Program/Erase Cycles
Data Retention : 10 years

Flash Memory Board
X600/X601 (64mm x 32mm)



Specifications:
■ X600: 4M bytes NAND Flash: 0.3W
■ X601: 8M bytes NAND Flash: 0.4W
Endurance : 1,000,000 Program/Erase Cycles
Data Retention : 10 years
Note: Used with I-7188XAUBXCIEXXGIEG

Battery Backup SRAM Board
X607 (64mm x 32mm); 0.5W




Specifications:
■ SRAM: 128K Bytes

Battery Backup SRAM Board
X608 (64mm x 32mm); 0.6W



Specifications:
■ SRAM: 512K Bytes
Note: Used with I-7188XAUBXCIEXXGIEG

I-7188 Expansion Boards Ordering Information

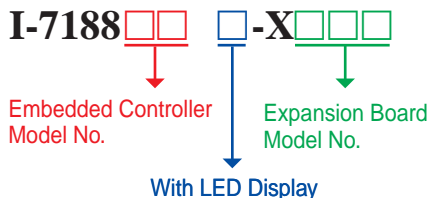

1. Expansion Boards + Embedded Controller ordering information.
I-7188XA —X
I-7188XB —X
I-7188XC —X
2. Expansion Boards + ISaGRAF Embedded Controller ordering information.
I-7188XG —X
With Ethernet I / O
I-7188EG —X
3. Ethernet I/O ordering information.
I-7188EX —X

Example.

I-7188EGD X304

- Ethernet ISaGRAF Embedded Controller with LED Display
- With X304 Expansion I/O Board
- 3 Channel A/D/1 Channel D/A / 4 Channel DIO