
## How to confirm the firmware version?


Steps to get the firmware version:

Step 1: Open the cover of GW-7552

Step 2: Close the initial pin (JP5) by jumper (Default is open)

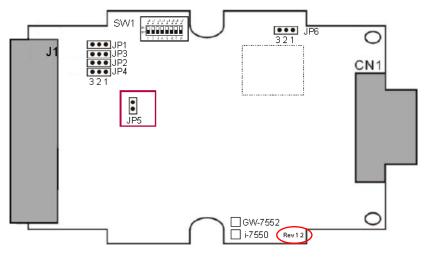


Rev 1.2

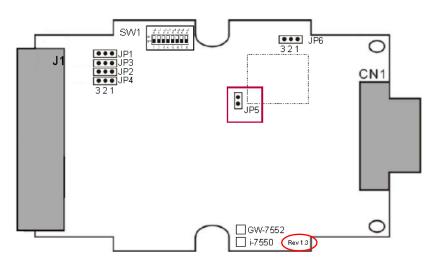

Rev 1.3

Step 3: Connect the power supply

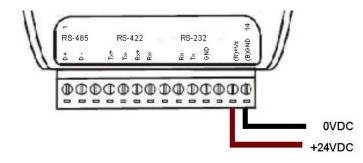

Step 4: Connect the PC and the GW-7552 by Com Port (RS-232)




Step 5: Turn the power on

Step 6: Run MiniOS7 utility on the PC (You can download MiniOS7 Utility at

http://ftp.icpdas.com.tw/pub/cd/8000cd/napdos/minios7/utility/minios7\_utility/\_.)

Step 7: Connect MiniOS7 Utility and the GW-7552 by click the connection button.

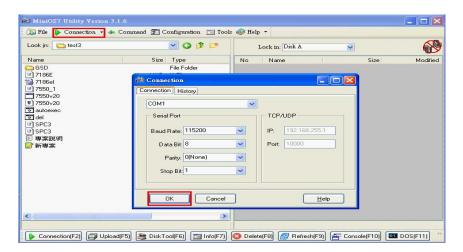

## Step 8: Get the firmware version


MiniOS7 Utility Verion :	3.2.1 Command 🗊 Configuration 📷 Te	ools 🥔 Help 🔻					
Look in: 🦳 V13	S 🖗 🖄		Loc	sk in: Disk A	<b>&gt;</b>	375,933 bytes available	Ð
Name	Size Type	Modified	No	Name	1	Size	Modified
😅 7188xw.exe 💓 7188xw.ini	90KB 應用程式 1KB 組態設定値	2008/4/18下午 01:19 2009/11/30上午 09:		7552v13.exe autoexec.bat		82,712 11	2009/7/10上午 07:53:0
7552v13.exe		2009/7/10上午 07:53		autoexec.bat		11	2009/7/10上午 07:53:0
( <u>)</u>			17186EX>CC	DM1, 2 files(s) 82,723	3 bytes		

7552v13.exe is the firmware name of GW-7552 in this example.

It means the firmware version is 1.3

Step 9: Turn the power off

Step 10: Open the initial pin (JP5) by remove the jumper

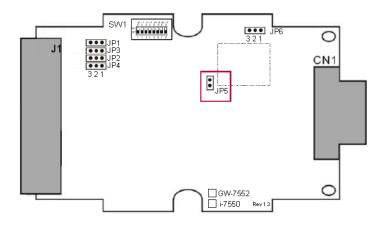

Step 11: Close the cover of GW-7552