

CA-3705A




■ 产品特征	
内芯包裹绝缘材料的化学成份	SR-PVC
内芯的截面积	9.5mm
内芯的具体电压	300V
内芯的数量	37 C
内芯的材料	鍍錫絞銅
电气数据	
电气设计	AC/DC
工作电压 [V]	300 V
电流负载 [A]	請參照線規
防护等级	請參照線規
■ 环境条件	
环境温度 [°C]	80 °C
环境温度变化 [°C]	80 °C
外壳防护等级	N/A
■ 机械技术数据	
设计	無
材料体	無
滚花螺母的材料	無
滚花螺母的拧紧扭矩 [Nm]	無
牵引链相配	
重量 [kg]	KGS

■ 电气连接

接口	DSUB 37P female+ DSUB 37P male
----	--------------------------------

外壳颜色	灰色
------	----

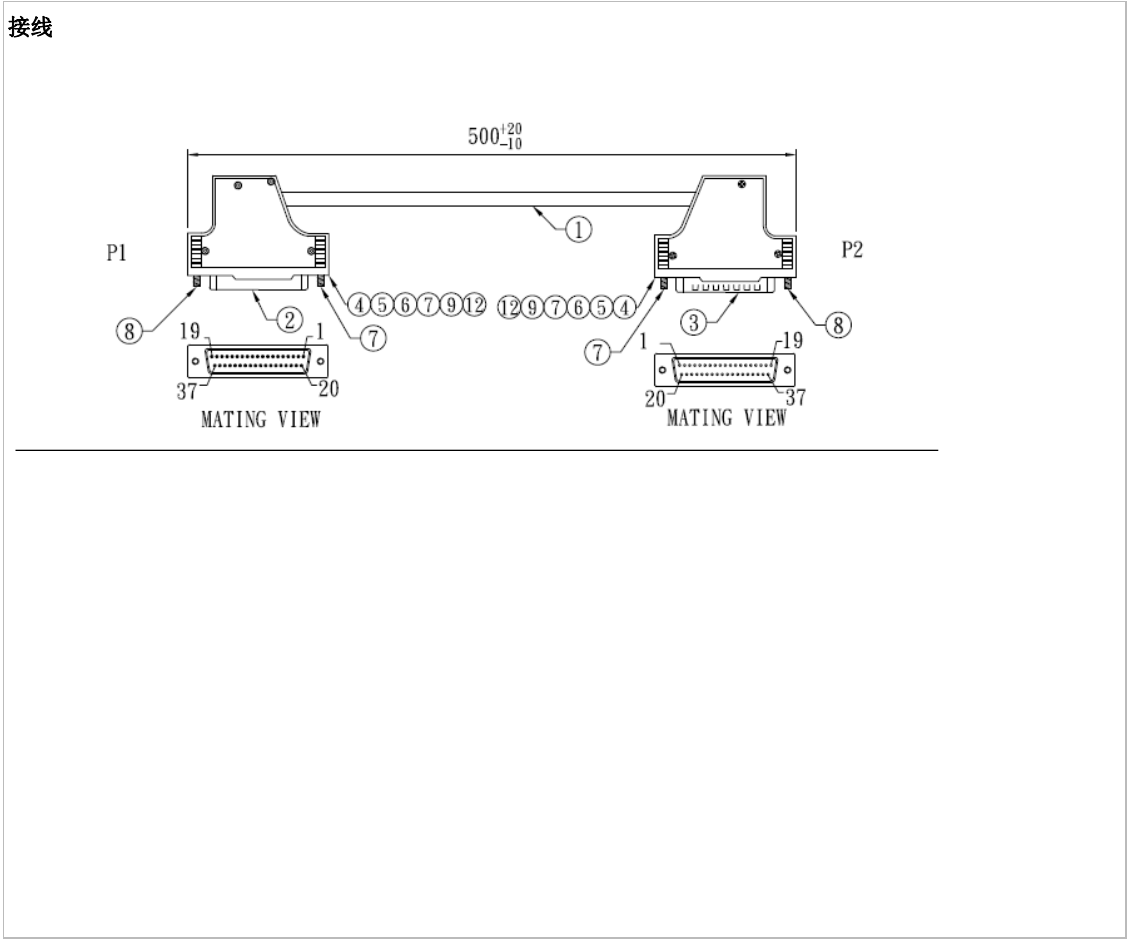

■ 注释

包装单位 [件]	1
----------	---

CHUAN WEI WIRE & CABLE CO.,LTD

69 Mei Chu Hsi rd.
Suan Hsi Hsiang
Taipei,Taiwan,R.O.C

TEL:886-2-24933755

FAX:886-2-24933808

SPECIFICATION OF MULTI-CONDUCTOR COMPUTER CABLE UL 2464 26AWG ,37 CONDUCTORS ,ALUMINUM FOIL & BRAID SHIELD

1) MARKING: AWM 2464 VW-1 80°C 300V E138961 CHUAN WEI 26AWG (L.F)

2) WIRE:

1. 26AWG, (7/0.16 TA), OD 0.48mm strand tinned copper.
2. 37 CONDUCTORS.
3. SR-PVC insulation material, thickness 0.23mm, ID:0.95mm.

3) SHIELD:

1. ALUMINUM-FOIL/MYLAR: OVERLAP 25% MIN (AL side outside).
2. DRAIN WIRE: 24AWG (7/0.20 TA).
3. BRAID:24/08/0.12TA Coverage 85% MIN.


4) JACKET:

1. MATERIAL: PVC
2. THICKNESS: 1.0mm
3. OD: 9.5mm +/- 0.12

5) CHARACTER:

1. VOLTAGE RATING: 300V.
2. TEMPERATURE RATING: 80°C.
3. CONDUCTOR RESISTANCE: 148.94 OHM/KM MAX. AT 20°C
4. INSULATION RESISTANCE: DC-500 V 10M OHM/KM MIN . AT 20°C
5. SHIELD RESISTANCE: 8.5 mOHM/M MIN . AT 20°C
6. CAPACITANCE: conductor to conductor: 84.0 pf/m at 1000HZS
conductor to shield : 164. 0 pf/m at 1000HZS
7. FLAME-RETARDANT PROPERTIES: VERTICAL FLAM TEST VW-1.
8. HI-POT TEST: AC 1500V/one minute

6) DETAIL OF STRUCTURE:

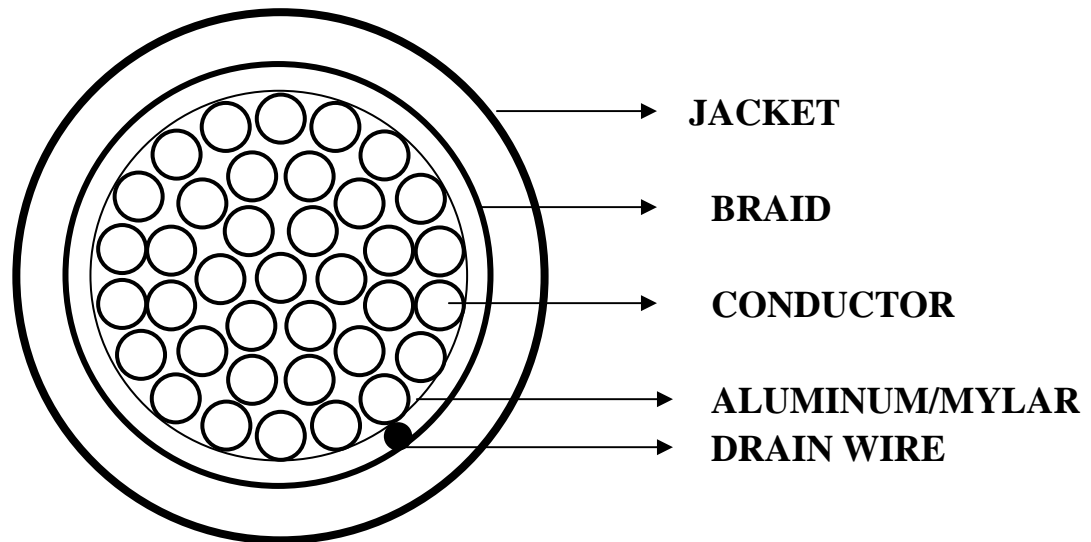

COLOR: 1.BLACK

2.WHITE

3.RED

4.YELLOW

5.VIOLET

6.BLUE

7.BROWN

8.GREEN

9.GRAY

10. LIGHT BLUE

11. ORANGE

12. LIGHT GREEN

13. PINK

14. WHITE/BLACK

15. RED/BLACK

16. YELLOW/BLACK

17. VIOLET/BLACK

18. GREEN/BLACK

19. ORANGE/BLACK

20. BLUE/BLACK

21. BROWN/BLACK

22. GRAY/BLACK

23. LIGHT BLUE/BLACK

24. LIGHT GREEN/BLACK

25. PINK/BLACK

26. ORANGE/WHITE

27. RED/WHITE

28. VIOLET/WHITE

29. BROWN/WHITE

30.GREEN/WHITE

31.BLUE/WHITE

32.GRAY/RED

33.LIGHT GREEN/RED

34.LIGHT BLUE/RED

35.PINK/RED

36.YELLOW/RED

37.VIOLET/RED