



Features ▶▶▶

- Supports operating temperatures from -25 °C ~ +75 °C
- Full duplex IEEE 802.3x and half duplex backpressure flow control
- Power input 12~48 VDC wide range redundant power inputs
- Automatic MDI/MDI-X crossover for plug-and-play
- DIN-Rail Mounting, Wall Mounting

Introduction

The NS-216 has 16 Ethernet ports that support 10/100 Base-TX, with a 10/100M auto negotiation feature and auto MDI/MDI-X function. It can connect 16 workstations and automatically switches the transmission speed (10 Mbps or 100 Mbps) for corresponding connections.

All Ethernet ports have memory buffers that support the store-and-forward mechanism, which assures that data can be transmitted properly. The NS-216 supports advanced network standards to optimize network performance, reduce maintenance costs, and secure network safety.

The flow control mechanism is also negotiated. There is link/data rate LEDs for each port to aid troubleshooting.


Specifications

| | |
|----------------------------|---|
| Technology | |
| Standards | IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3x for Flow Control, Back Pressure Flow Control Energy Efficient Ethernet (EEE) as per 802.3az; this provides power savings during idle network activity |
| Processing Type | Store & forward |
| MAC Addresses | 8K |
| Frame Buffer Memory | 2 Mbit |
| Interface | |
| RJ-45 Ports | 16 x 10/100 Base-TX |
| LED Indicators | PWR1, PWR2, Fault, Link/Act, Speed |
| Ethernet Isolation | 1500 V _{rms} 1 minute |


| | |
|----------------------------------|--|
| Power | |
| Input Voltage Range | +12 Vdc ~ +48 Vdc Redundant dual Input |
| Power Consumption | 0.04 A @ 24 VDC without loading, 0.10A @ 24VDC full loading 0.02 A @ 48 VDC without loading, 0.06A @ 48VDC full loading |
| Protection | Power reverse polarity protection |
| Connector | 6-Pin Removable Terminal Block |
| Mechanical | |
| Casing | Plastic |
| Dimensions (W x L x H) | DIN-rail mounting: 56 mm x 171 mm x 127 mm Wall mounting: 56 mm x 176 mm x 127 mm |
| Installation | DIN-rail mounting or wall mounting |
| Environmental | |
| Operating Temperature | -25 °C ~ +75 °C |
| Storage Temperature | -40 °C ~ +85 °C |
| Ambient Relative Humidity | 10 ~ 90% RH, non-condensing |

Redundant Power Input

Both power inputs can be connected simultaneously to live DC power sources. If one power source fails, the other live source will act as a backup, and automatically supplies all of NS-216 power needs.

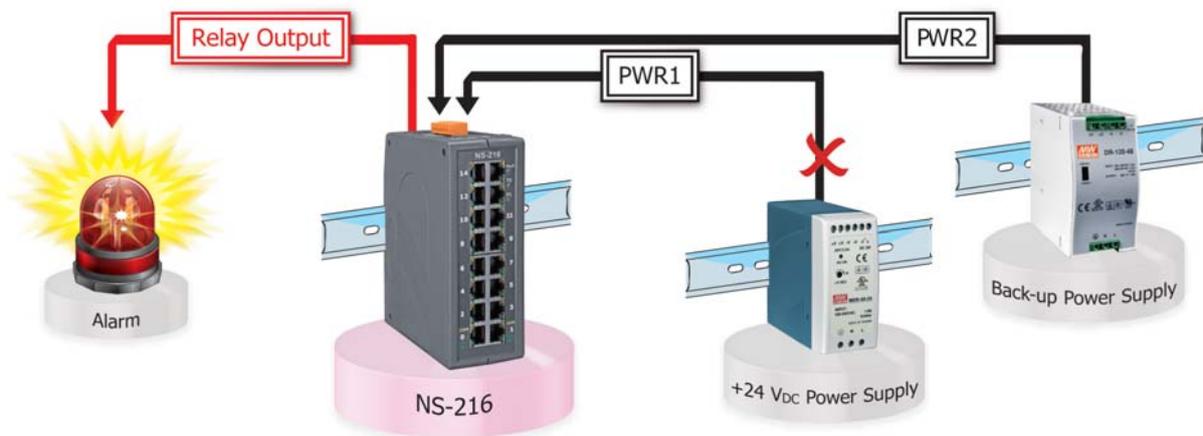

Dimensions (Units: mm)

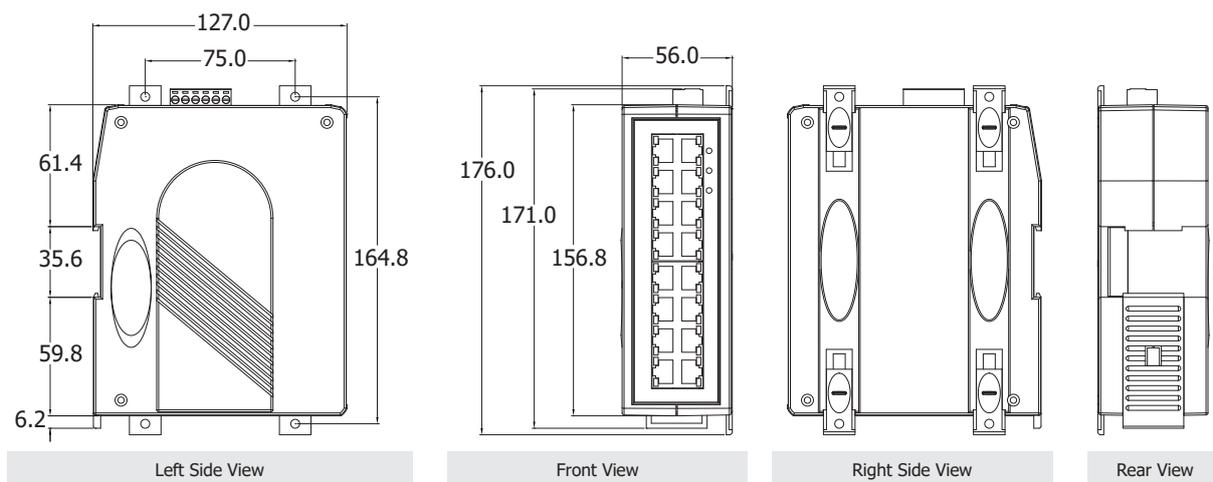

Ordering Information

| | |
|-----------|---|
| NS-216 CR | Unmanaged 16-port Industrial 10/100 Base-TX Ethernet Switch (RoHS) Includes 4SI71G0000020 Wall mount |
|-----------|---|