

## Packing List

In addition to this guide, the package includes the following items:



PET-AR400



Screw Driver

## Factory Default Settings

The default IP address for the PET-AR400 are as follows:

IP	192.168.255.1
MASK	192.168.0.1
Gateway	255.255.0.0

## Technical Support


[service@icpdas.com](mailto:service@icpdas.com)

[www.icpdas.com](http://www.icpdas.com)

## Resources

How to search for drivers, manuals and spec information on ICP DAS website.

- For Mobile Web

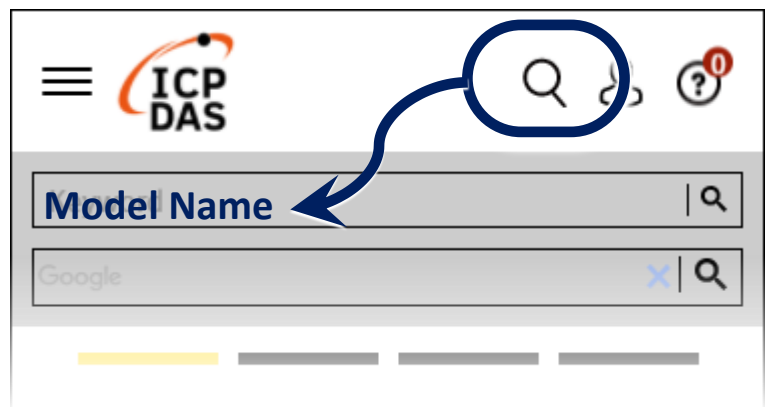

- For Desktop Web