IP-8000 Series Quick Start

V2.0, Dec. 2020

Packing List

In addition to this guide, the package includes the following items:

IP-8411/IP-8811/
IP-8441/IP-8841

D-SUB Cable
(CA-0915)

Screw Driver

Technical Support

service@icpdas.com
www.icpdas.com

The default IP settings for Ethernet PAC are as follows:

IP Address   : 192.168.255.1
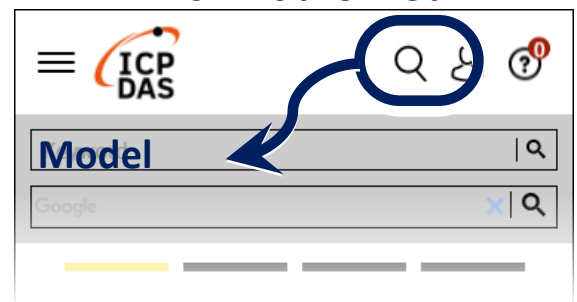Mask   : 255.255.0.0
Gateway   : 192.168.0.1

Resources

How to search for drivers, manuals and spec information on ICP DAS website.

• For Desktop Web

• For Mobile Web

Connect to the power supply

+10~+30VDC — PWR1
GND — P.GND
PWR2
P.GND
R.COM
R.NO
D+
D-
F.G.