



Features

- Compatible with CAN 2.0 parts A and B
- Fully compatible with ISO 11898-2 standard
- Support CAN bard from 10 kbps ~ 1 Mbps
- 2500 Vrms photo couple isolation on the CAN bus
- Built-in jumper to select 120 Ω terminal resister
- 3 kV galvanic isolation
- 4 independent CAN channels
- Direct memory mapping to the CAN controller
- LabView/DASYLab/InduSoft driver
- Driver support Windows XP/7/8/10, Linux



PISO-CAN400U-D PISO-CAN400U-T

Universal PCI CAN Communication Card

Introduction


The PISO-CAN400U can represents an economic solution of an active CAN board. It has four independent CAN bus communication ports with 5-pin screw terminal connector or 9-pin D-sub connector, and has the ability to cover a wide range of CAN applications. Besides, PISO-CAN400U uses the new CAN controller Phillips SJA1000T and transceiver 82C250, which provide bus arbitration, error detection with auto correction and re-transmission function. It can be installed in both 3.3 V and 5 V PCI slot and supported truly "Plug & play".

🖿 Utility


Mode		Dest)	Port 4 RTR 0	1	Dien. 8	0000) 1a	D100 2b	D200	D301	D40) 5e	D500	D600	D700 88	Timentina
NO.	Mode	ID	RIR	L	DO	D1	D2	D3	D4 I	5 D6	D7	Timer	Status	Add
														Modify
														Send
								D3	D4 1	5 D6	D7	Time Sta		
NO,	Mode	ID	RIR	1	DO	D1	D2	US	De 1	15 100	Dr	How Sh	▲ (s):qm	Ric Pattor
NO.	Mode	ID	RIR	1	DO	D1	D2	05	D4 1	15 10	Dr	THOSe STA	<u>(101:15)</u>	Data Some
NO.	Mode	ID	RIR	1	DO	D1	D2	US	D+ 1	15 110		Tune Sta	<u>(():()</u>	Deta Rom

- Can be a CAN system monitor tool with CAN cards
- · Can test CAN cards
- Send/Receive/Record CAN messages
- Provide cyclic transmission function
- · Record the CAN messages with filter ID with time stamp


Software Layer




Hardware architecture




🖿 Pin Assignments






Terminal Resistor



Hardware Specifications

Model Name	PISO-CAN400U-D	PISO-CAN400U-T
Bus Interface		
Туре	Universal PCI, 3.3 V and 5 V, 33 MHz, 32-bit, p	lug and play
CAN Interface		
Controller	NXP SJA1000T with 16 MHz clock	
Transceiver	NXP 82C250	
Channel number	4	
Connector	9-pin male D-Sub	5-pin screwed terminal block
Baud Rate (bps)	10 k, 20 k, 50 k, 125 k, 250 k, 500 k, 800 k, 1	M (allow user-defined baud rate)
Terminal Resistor	Jumper for 120 Ω terminal resistor	
Power		
Power Consumption	300 mA @ 5 V	
Software		
Driver	Windows XP/7/8/10, Linux 2.6.x ~ 5.4.0, LabVi	iew, DASYLab, InduSoft
Library	VB 6.0, VC++ 6.0, BCB 6.0, Delphi 4.0	
Mechanism		
Dimensions	126mm x 22mm x 85mm (W x L x H)	
Environment		
Operating Temp.	-20 ~ +60°C	
Storage Temp.	-40 ~ +70 °C	
Humidity	5 ~ 85% RH, non-condensing	

Flow Diagram for Applications

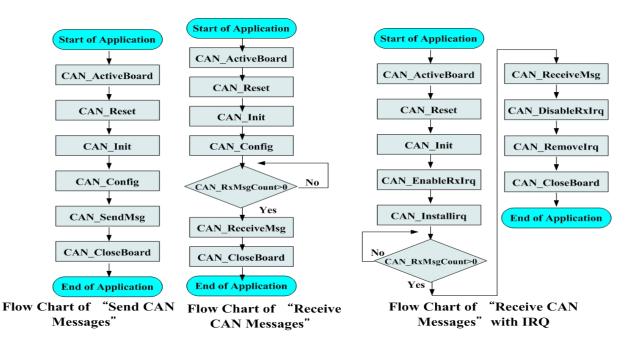

Ordering Information

PISO-CAN400U-D CR	4-Port Isolated Protection CAN Communication Board with 9-pin D-sub connector (RoHS)
PISO-CAN400U-T CR	4-Port Isolated Protection CAN Communication Board with 5-pin Screw Terminal (RoHS)