



How to confirm the firmware version?

Steps to get the firmware version:


1. Open the cover of GW-7557
2. Close the flash protection pin 1, 2 (**JP1**) by jumper

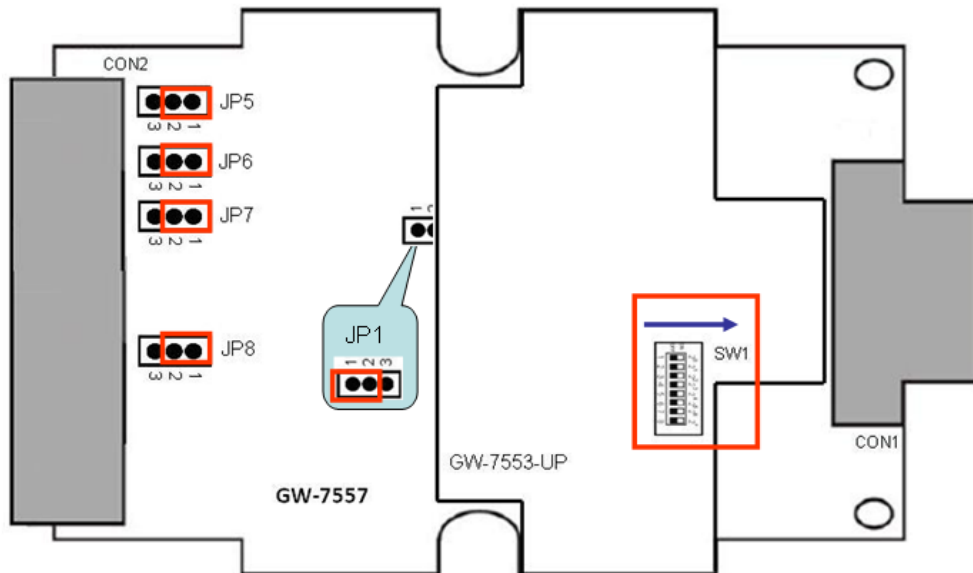


3. Connect **Init*** and **GND**

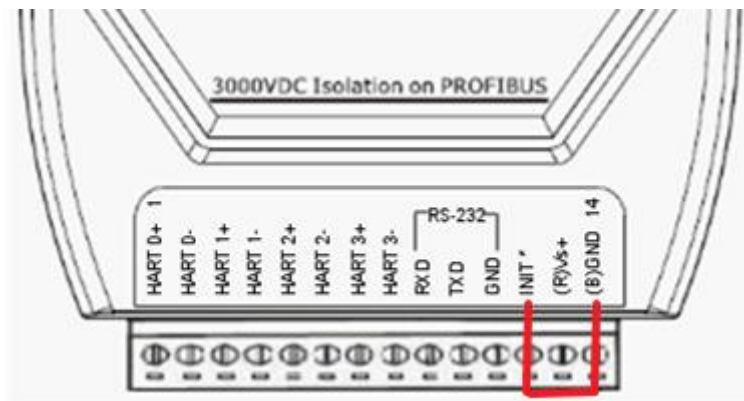

4. Connect the power supply

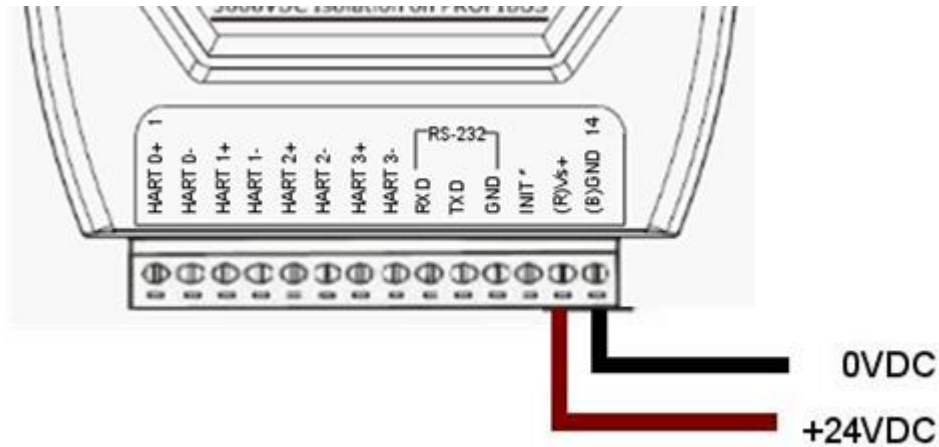

5. Connect the PC and the GW-7557 by Com Port (RS-232) and turn the **power on**
6. Change Comport setting in the **7188xw.ini** EX:com6 you should set **C6**

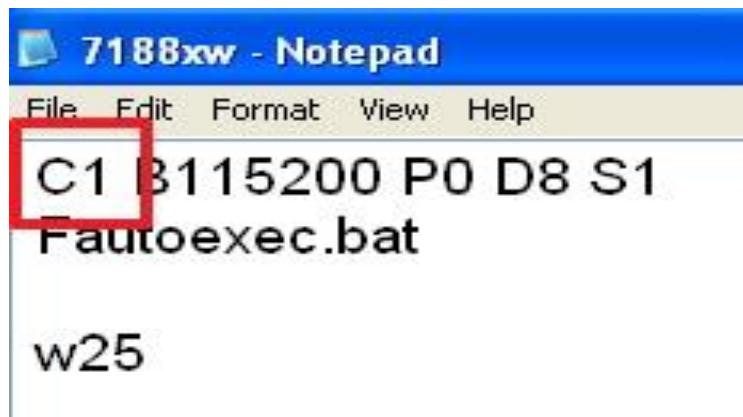

7. Run **7188xw.exe** and key in "**enter**". You must confirm the GW-7557 which is in Command Mode.

```
7188XW 1.31 [COM1:115200,N,8,1],FC=0,CTS=0, DIR=D:\123
7188x for WIN32 version 1.31 (2006/03/14)[By ICPDAS. Tim Tsai.]
[Begin Key Thread...]Current set: Use COM1 115200,N,8,1
AutoRun:autoexec.bat
Autodownload files: None
Current work directory:"D:\123"
original baudrate = 115200!
now baudrate = 115200!

ICP_DAS MiniOS7 for I-7186Ex Ver. 2.00 build 006, Aug 14 2007 15:37:34
OS id=31
SRAM:512K, FLASH MEMORY:512K
[CPU=R2240]
CPU internal WDT is ENABLED(WDT timeout=0.8 sec)
Serial number= 5A 5A 5A 5A 5A 5A 5A 5A

i7186EX>
i7186EX>
```

8. Key in "**dir**" + "**enter**". The filename will show the Firmware version of GW-7557.
(ex: 7557V12.exe → FW version V1.2)

```
7188XW 1.31 [COM2:115200,N,8,1],FC=0,CTS=0, DIR=D:\Revising\GW7552\os7
7188x for WIN32 version 1.31 (2006/03/14)[By ICPDAS. Tim Tsai.]
[Begin Key Thread...]Current set: Use COM2 115200,N,8,1
AutoRun:
Autodownload files: None
Current work directory="D:\Revising\GW7552\os7"
original baudrate = 1200!
now baudrate = 115200!

ICP DAS MiniOS7_UDP for PDS-700 Ver. 2.02 build 033,Jan 14 2019 16:57:18
OS id=31
SRAM:512K, FLASH MEMORY:512K
[CPU=R2240]
CPU internal WDT is ENABLED(WDT timeout=0.8 sec)
Serial number= 5A 5A 5A 5A 5A 5A 5A 5A

PDS-700>dir

Files in Disk A:
 0)autoexec.bat 08/13/2020 16:14:02 11[0000B]8002:0000-8002:000A
 1)7557V12.EXE 05/19/2020 11:37:12 85758[14EFE]8004:000B-94F4:0008
Total file number is 2 Free space=307351 bytes
-----
Files in Disk B:
 0)7557VQC.EXE 10/04/2019 16:07:07 31481[07AF9]E002:0000-E7B1:0008
Total File number is 1 Free space=33991 bytes
PDS-700>
```

9. Turn the **power off**
10. Disconnect **Init*** and **GND**
11. Close the flash protection pin 2, 3 (**JP1**) by jumper
12. Close the cover of GW-7557