

Classification	ISaGRAF English FAQ-030						
Author	Chun Tsai	Version	1.0.0	Date	Mar. 2006	Page	1 / 2

Setting special “range” parameter of temperature input board to get clear “Degree Celsius” or “Degree Fahrenheit” input value. For example, “1535” means 15.35 degree?

ICPDAS provides many temperature input modules (boards) as below.

With “broken-line detection” or called “wire opening detection”.

Thermocouple type: I-87018R, 87019R, 7018R, 7018BL, 7019, 7019R

RTD type: I-87013, 87015, 7013, 7015, 7033

Thermister type: I-87005, 7005

Without “broken-line detection”.

Thermocouple type: I-87018, 7018, 7018P


The “range” parameter of temperature IO board can be “standard setting” or “special setting”.

For example, I-87013: 4 channel RTD input module. Its range can be

20 : Platinum 100, a=0.00385, -100 ~ +100 degree Celsius

...

2F : Platinum 100, a=0.003916, -200 ~ +200 degree Celsius

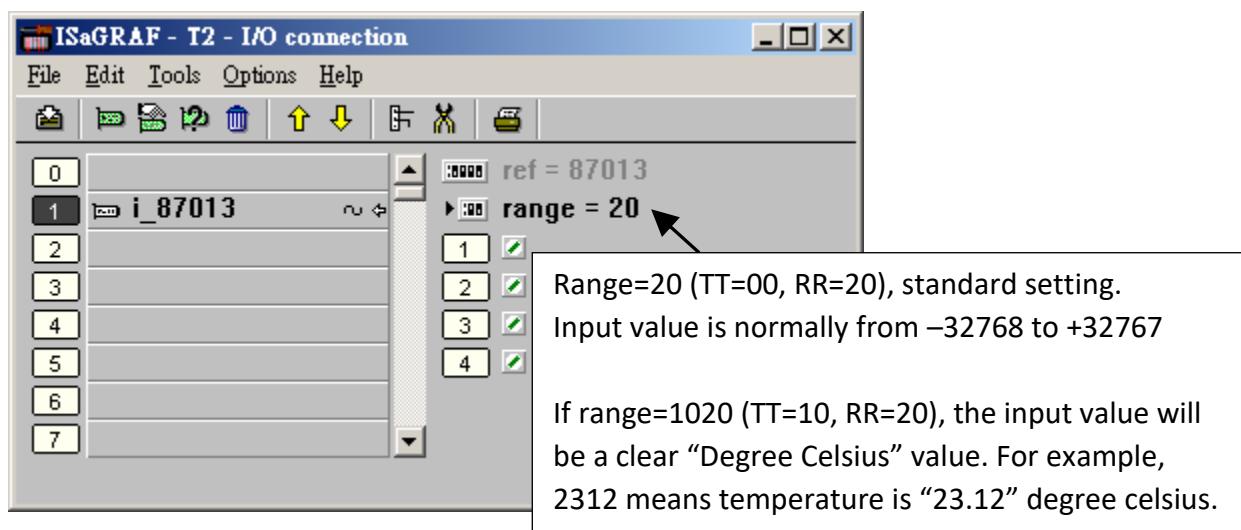

If setting range as 20 (or 21 to 2F), then it is “standard setting”. The temperature input value is 2’s compliment value from –32768 to +32767 depends on the “range” value. For example, setting range as 20, value of –32767 means temperature is about –100 Degree, +32766 is about +100 Degree. Value of 16383 means +50 Degree. (**Note:** Normally value of –32768 or +32767 means wire “broken-line”)

If user want to get a clear temperature input value, for example, value of 2312 means “23.12” Degree Celsius. Then please set “range” to a special value defined as below.

Classification	ISaGRAF English FAQ-030					
Author	Chun Tsai	Version	1.0.0	Date	Mar. 2006	Page

Important: Special "range" is supported since driver version of I-8xx7: 3.11 , W-8xx7: 3.24

Format: TTRR (Hex. Value)

TT=10 (Convert to "Degree Celsius")


TT=20 (Convert to "Degree Fahrenheit")

TT=00 (Default value, -32768 to +32767, this is "standard setting")

RR: original "range" setting

For example, setting I-87013's "range" as

- A. 1020 : (TT=10, RR=20) the input value will be "Degree Celsius", unit is 0.01 degree, range= "20 : Platinum 100, a=0.00385, degree Celsius". That results input value of "2356" = 23.56 Degree Celsius, "-489" = -4.89 Degree Celsius, and "999990" = sensor broken line.
- B. 202A : (TT=20, RR=2A) the input value will be "Degree Fahrenheit", unit is 0.01 degree, range= "2A: Platinum 1000, a=0.00385, degree Celsius". That results input value of "4512" = 45.12 Degree Fahrenheit, "500" = 5.00 Degree Fahrenheit, and "999990" = sensor broken line.
- C. 21 : (TT=00, RR=21) the input value will be Default value (standard "range" setting), -32768 to +32767, range = "21 : Platinum 100, a=0.00385, degree Celsius"

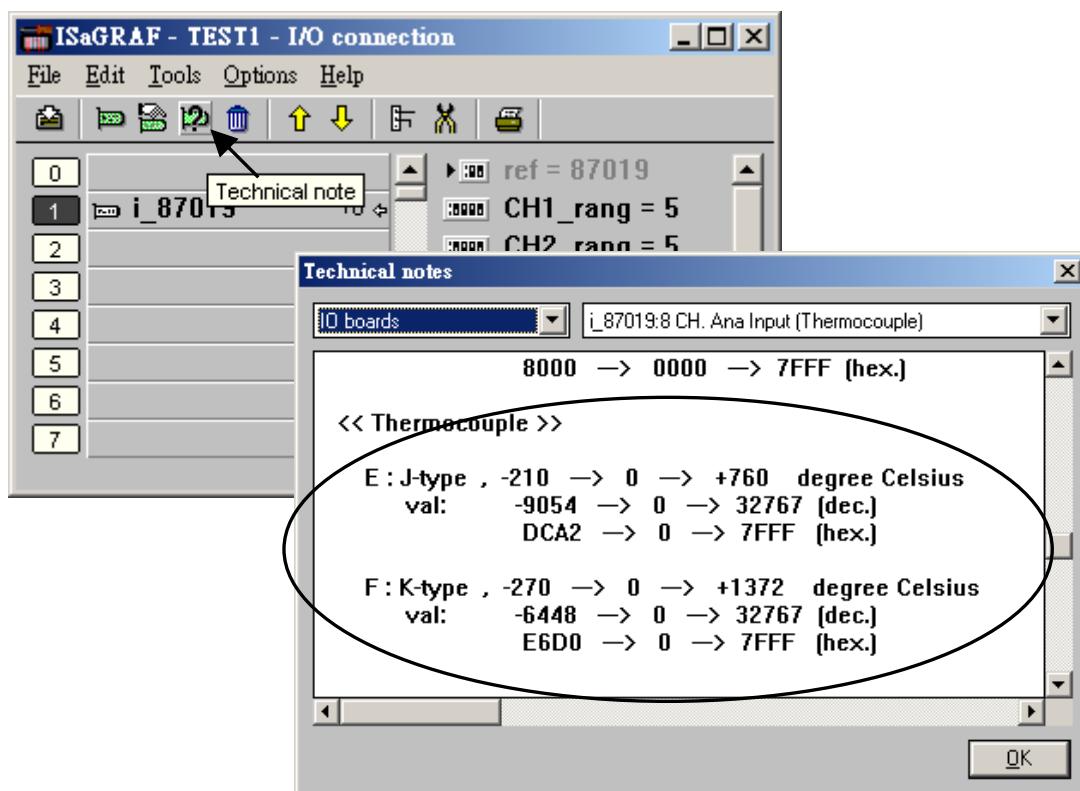

Click the link for more ISaGRAF FAQ:

<http://www.icpdas.com/en/faq/index.php?kind=280#751>