



SG-3227 Quick Start

What's In the Box!

In addition to this guide, the package includes the following items:



SG-3227



BNC adaptor x 2





Quick Start




Screw driver

➤ Appearance and Pin Assignments

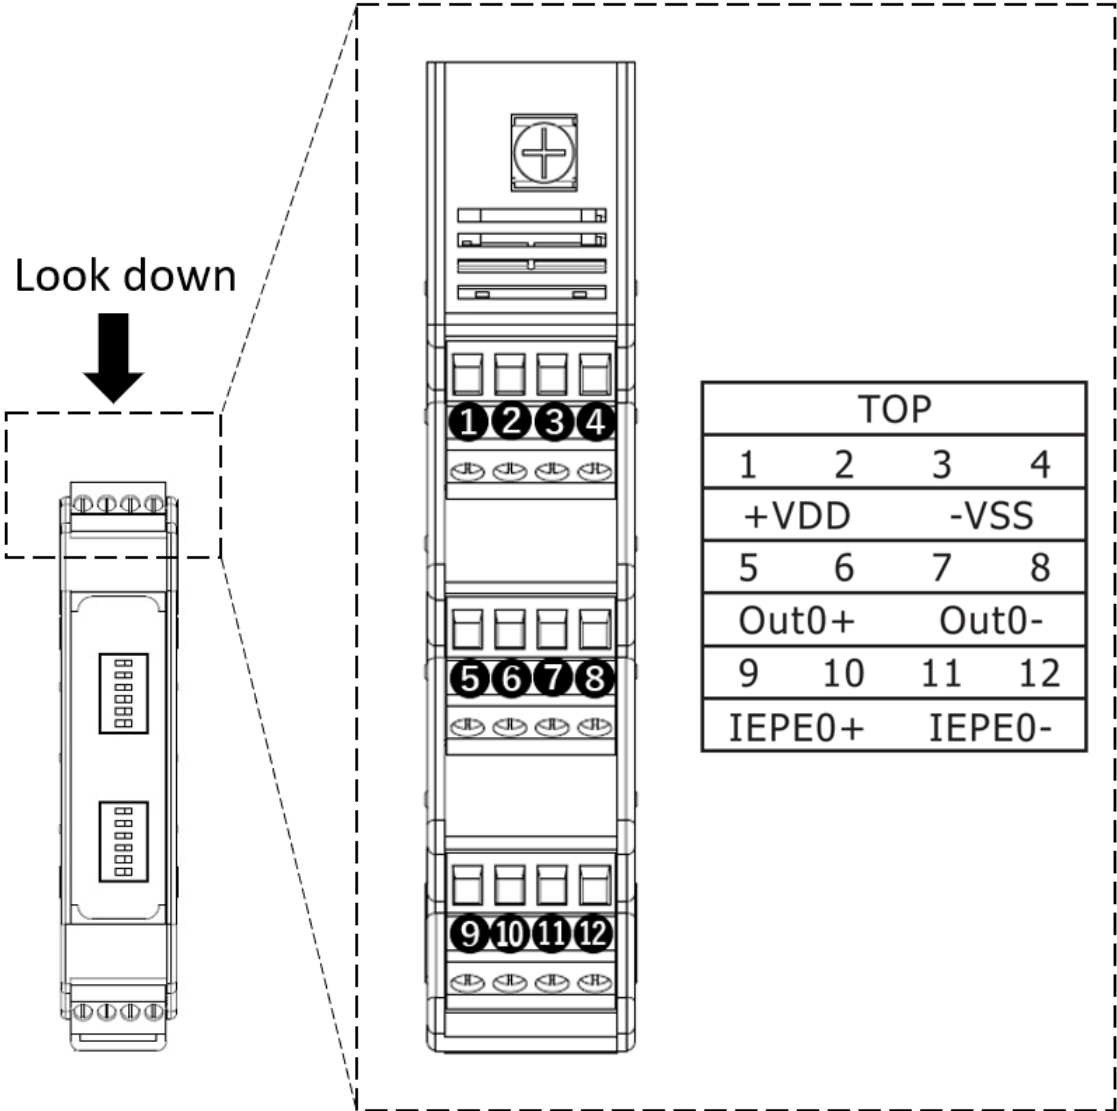


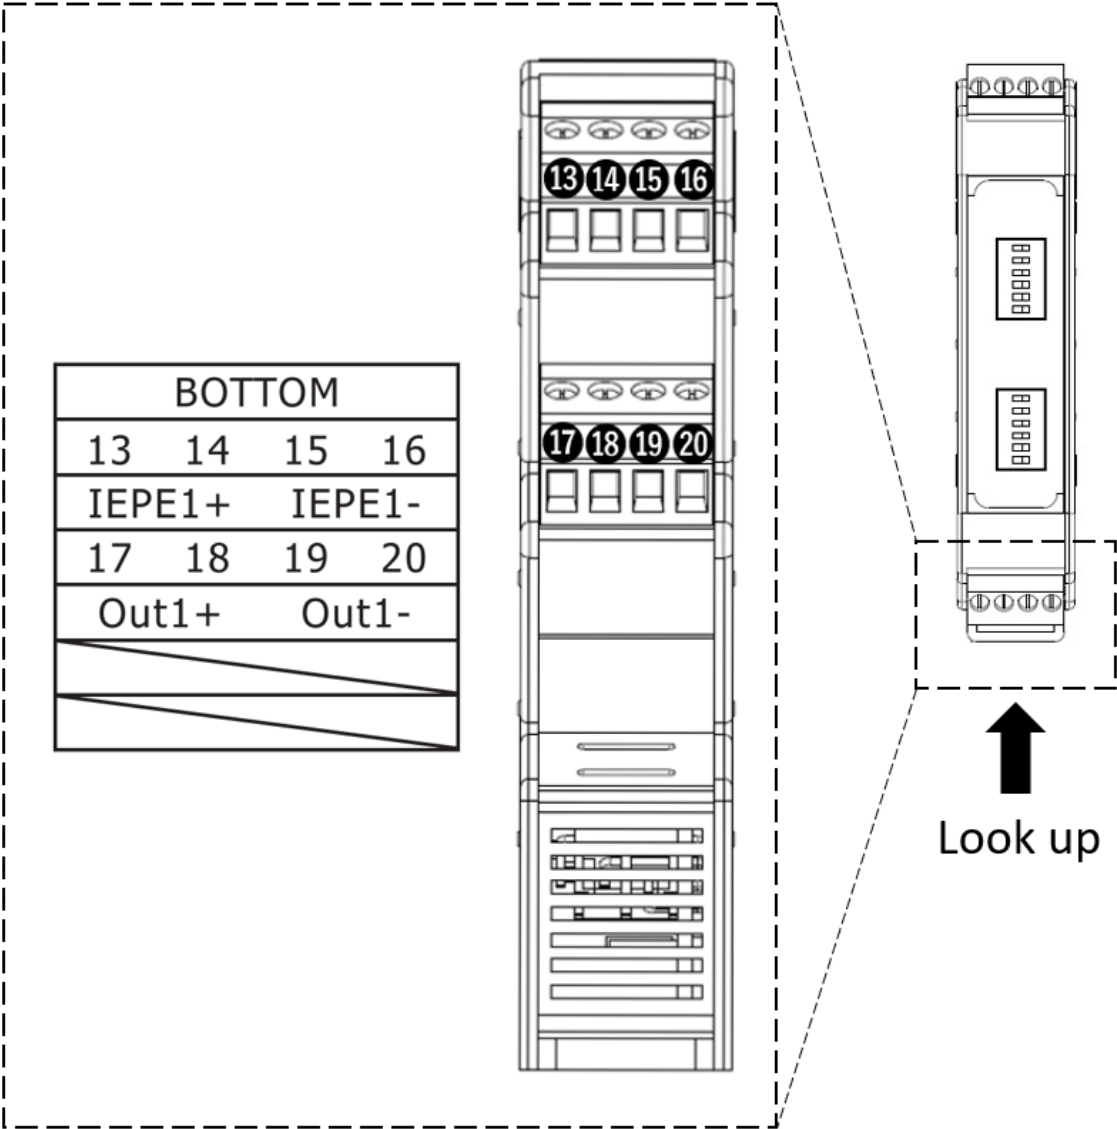

➤ Wiring

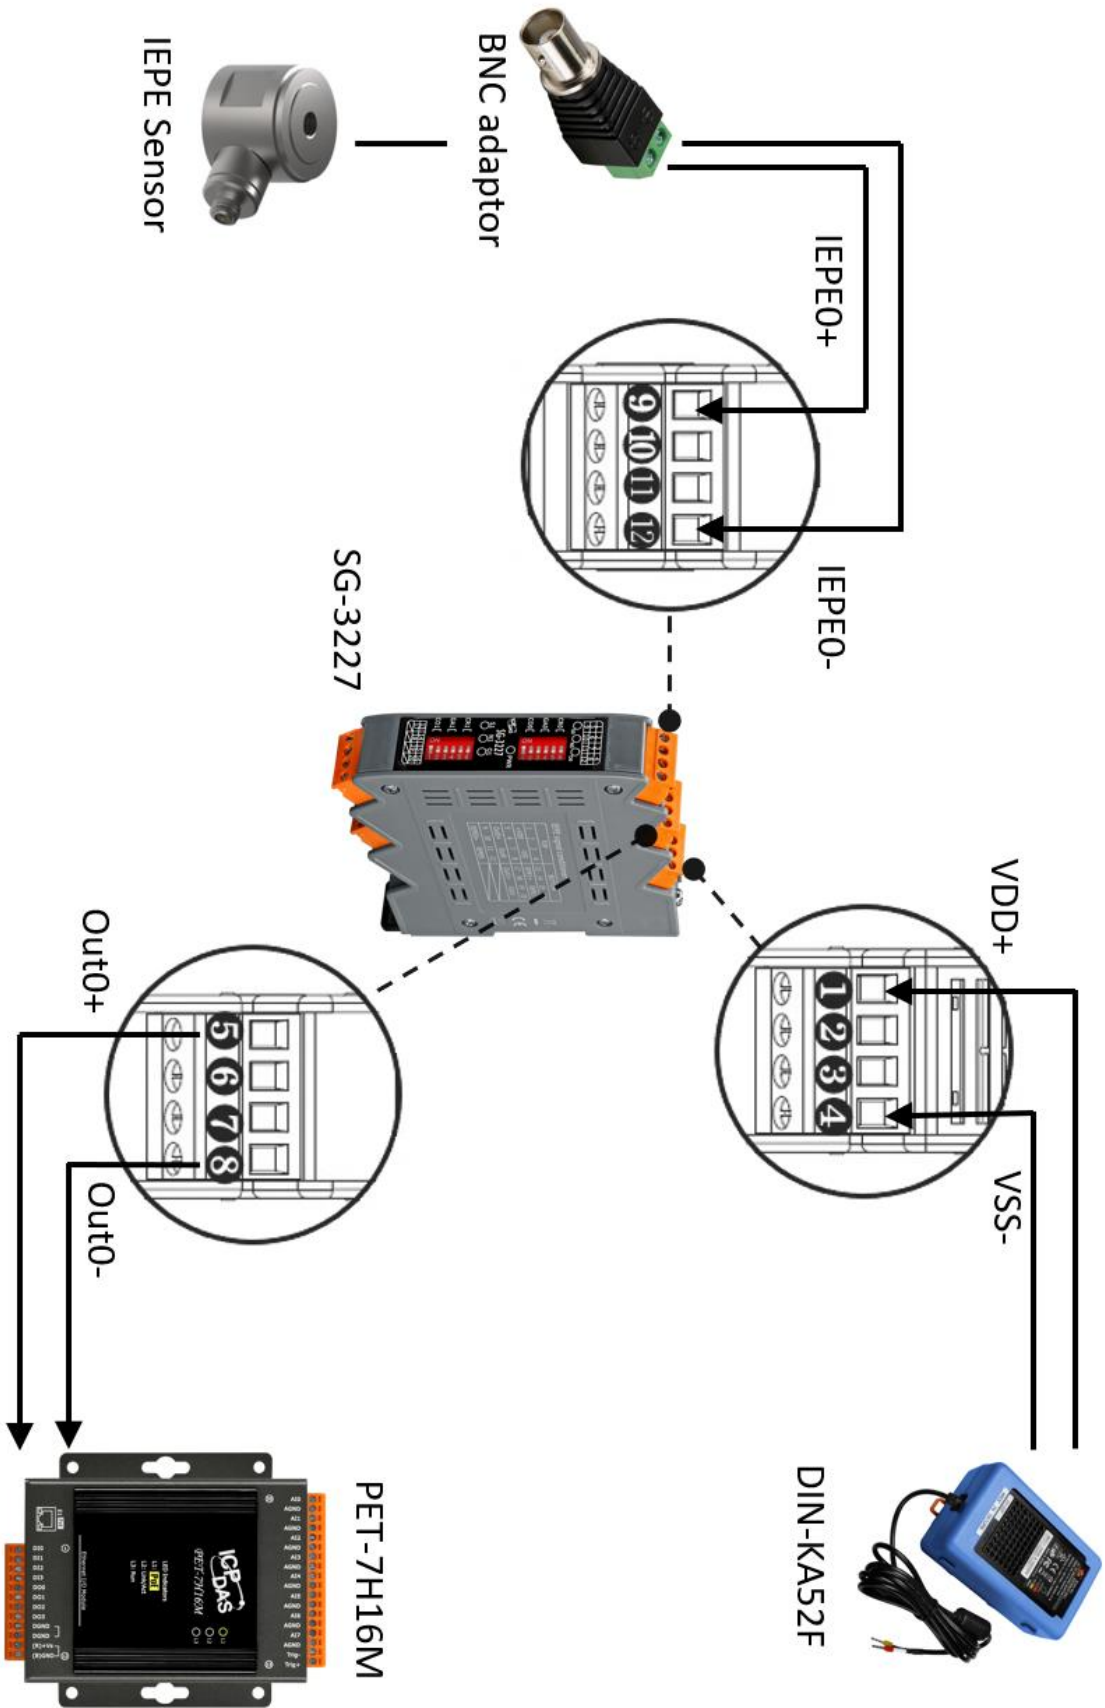


➤ LED indicators

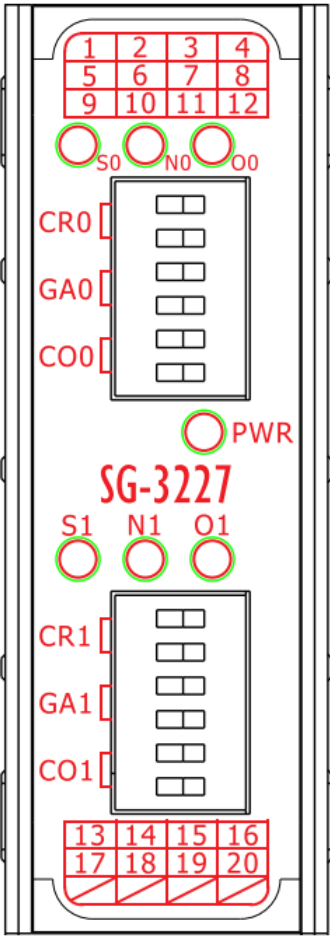

LED	LED Status	LED Description
PWR	Bright	Power supply
O0, O1	Bright	Yellow : Sensor Open
N0, N1	Bright	Green : Normal Operation
S0, S1	Bright	Red : Sensor Short

➤ Switch Setting

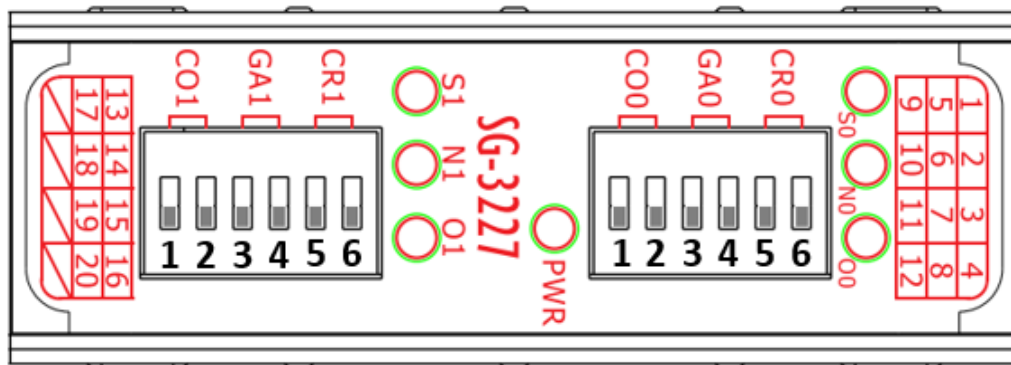

Coupling Setting	1	2
DC	OFF	OFF
AC (0.1uF)	ON	OFF
AC (1 uF)	OFF	ON

Gain Setting*	3	4
X1	OFF	OFF
X10	ON	OFF
X100	OFF	ON

*DC-coupled does not support amplifier function

Excitation Current Setting	5	6
2 mA	OFF	OFF
4 mA	ON	OFF
6 mA	OFF	ON
10 mA	ON	ON

➤ **Technical Support**

1. ICP DAS Service : **service@icpdas.com**
2. Product Website:

http://www.icpdas.com/root/product/solutions/signal_conditioning_modules/sg-3000/sg-3227.html

