



CL-200-WF Series Quick Start

v1.3.0, Mar 2024

Packing List

In addition to this guide, the package includes the following items:



CL-200-WF Module



Mounting Plate Filter



M4x12L Drywall Screws* 2



Filter Patch
(For CL-21X-WF Series) * 3



Filter Patch
(For CL-22X-WF Series) * 3

Technical Support


service@icpdas.com

www.icpdas.com

Resources

How to search for drivers, manuals and spec information on ICP DAS website.

- For Mobile Web

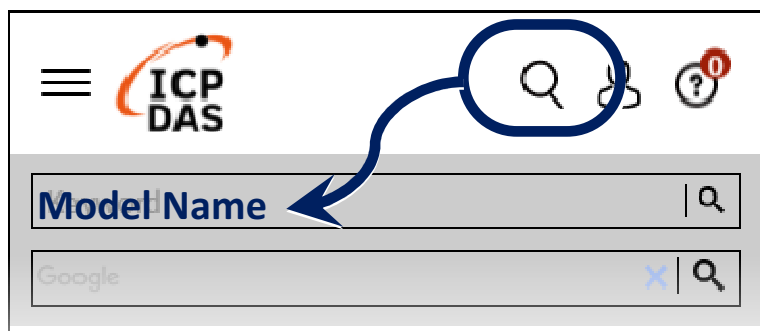

- For Desktop Web



Powering-on the CL-200-WF logger

The factory default settings for Wi-Fi communication of the CL-200-WF are as follows.

Mode	AP
Wireless Security	WPA/WPA2, "00000000"
DHCP Server (AP Mode)	DHCP Server on, start IP: 192.168.255.2 or 192.168.254.2
Wi-Fi Channel (AP Mode)	11
IP Address	192.168.255.1 or 192.168.254.1
Gateway Address	192.168.255.254 or 192.168.254.254
Subnet Mask	255.255.0.0
SSID	CL-2xx-WF or ICPDAS_CL22x_xxxx
Modbus TCP Port	502

The Wi-Fi IIOT Utility is provided to configure and test the CL-200-WF module through the Wi-Fi interface. Please refer to chapter 5 of the user manual for details. You can also use a browser to configure and test the CL-200-WF module through the Ethernet interface. Please refer to chapter 3 of the user manual for details.