


X001 Release Note:

Supported Products: I-7188XC

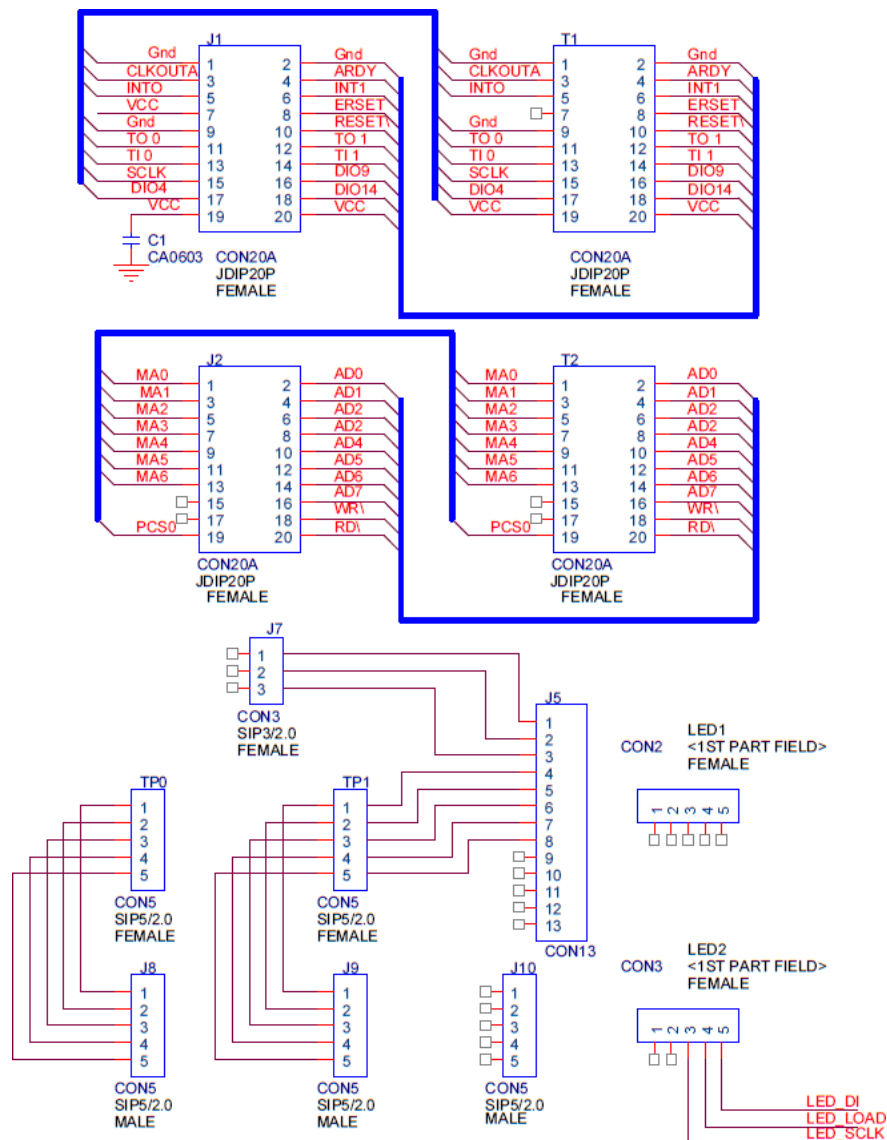

Jumper Setting:

Note: user should remove R19, R20, R21, R22 and R23 in the 7188XC first.

- J1: I/O expansion bus, connect to J1 of 7188XC
- J2: I/O expansion bus, connect to J2 of 7188XC
- J7: 3 user defined Pins via X-board
- TP0: Original function on 7188XC
- TP1: 5 user defined Pins via X-board
- Daughter Board: JP9, JP10 (close)
- On Board: JP8, JP9 (close)

Manual:

<http://ftp.icpdas.com/pub/cd/8000cd/napdos/xboard/document/>

Technical Service:

service@icpdas.com