


X103 Release Note:

Supported Products: I-7188XC

Specifications:

Digital Input	
Channel	7
Contact	Wet
On Voltage Level	+3.5 Vdc ~ +30 Vdc
Off Voltage Level	0 ~ +1 Vdc
Intra-module Isolation, Field to Logic	3750 Vrms

Pin Assignment:

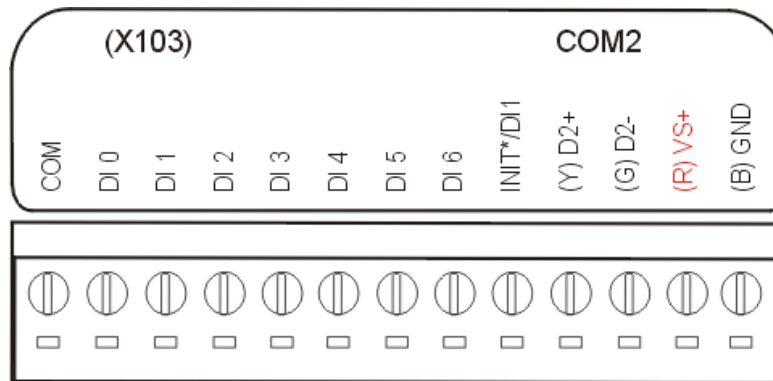

Wire Connection:

Input Type	ON State DI value as 0	OFF State DI value as 1
TTL/CMOS Logic		
Open Collector		

Jumper Setting:

Note: user should remove R19, R20, R21, R22 and R23 in the 7188XC first.

- J1: I/O expansion bus, connect to J1 of 7188XC
- J2: I/O expansion bus, connect to J2 of 7188XC
- J7: Two channels of isolated DI
- TP0: Original function on 7188XC
- TP1: Five channels of isolated DI
- Jumper: Select TP0 or TP1 function
 - TP0: J9 and J8 closed
 - TP1: J9 and J10 closed

Programming:

for I-7188XC

http://ftp.icpdas.com/pub/cd/8000cd/napdos/7188xabc/7188xc/demo/bc_tc/xboard/

Manual:

<http://ftp.icpdas.com/pub/cd/8000cd/napdos/xboard/document/>

Technical Service:

service@icpdas.com