

## X110 Release Note:


### Supported Products:

I-7188XB/XG/EX/EG,  $\mu$ PAC-7186EX/EG/EX-FD/EX-SM,  $\mu$ PAC-7186PEX

### Specifications:

| Digital Input                          |                    |
|----------------------------------------|--------------------|
| Channel                                | 14                 |
| Contact                                | Dry                |
| On Voltage Level                       | +3.5 VDC ~ +30 VDC |
| Off Voltage Level                      | 0 ~ +1 VDC         |
| Intra-module Isolation, Field to Logic | non-isolated       |

### Pin Assignment:

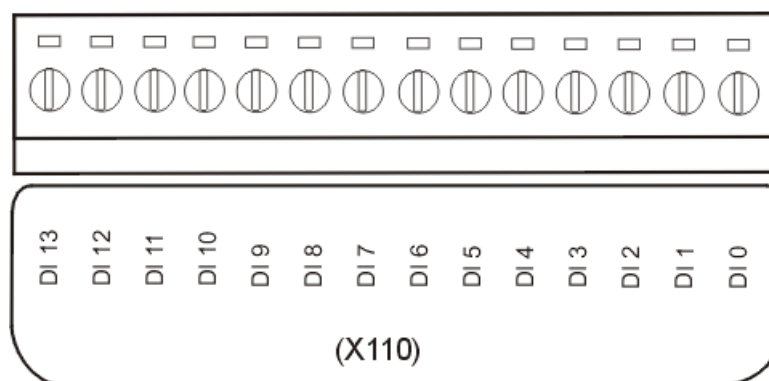

### Wire Connection:

| Input Type     | ON State<br>DI value as <b>0</b> | OFF State<br>DI value as <b>1</b> |
|----------------|----------------------------------|-----------------------------------|
| Relay Contact  |                                  |                                   |
| TTL/CMOS Logic |                                  |                                   |
| Open Collector |                                  |                                   |

---

**Programming:**

**for I-7188XB**

[http://ftp.icpdas.com/pub/cd/8000cd/napdos/7188xabc/7188XB/Demo/BC\\_TC/Xboard/](http://ftp.icpdas.com/pub/cd/8000cd/napdos/7188xabc/7188XB/Demo/BC_TC/Xboard/)

**for I-7188EX**

[http://ftp.icpdas.com/pub/cd/8000cd/napdos/7188e/demo/bc\\_tc/xboard/](http://ftp.icpdas.com/pub/cd/8000cd/napdos/7188e/demo/bc_tc/xboard/)

**for  $\mu$ PAC-7186EX**

[http://ftp.icpdas.com/pub/cd/8000cd/napdos/7186e/demo/basic/bc\\_tc/xboard/](http://ftp.icpdas.com/pub/cd/8000cd/napdos/7186e/demo/basic/bc_tc/xboard/)

**for I-7188XG/I-7188EG (manual, Driver, Demo)**

<http://ftp.icpdas.com/pub/cd/8000cd/napdos/isagraf/>

**Manual:**

<http://ftp.icpdas.com/pub/cd/8000cd/napdos/xboard/document/>

**Technical Service:**

[service@icpdas.com](mailto:service@icpdas.com)