


X301 Release Note:

Supported Products: I-7188XC

Specifications:


Analog Input	
Channel	1
Wiring	Single-Ended
Range	0 ~ 2.5 V _{DC}
Resolution	12-bit
Sampling Rate	900 Hz Max. (Read one channel)
Input Impedance	1 KOhm
Over voltage Protection	+/- 5 V _{DC}
Intra-module Isolation, Field to Logic	non-isolated
Analog Output	
Channel	1
Range	0 ~ 4.095 V _{DC}
Resolution	12-bit
Output Capacity	5 mA
Intra-module Isolation, Field to Logic	non-isolated

Pin Assignment:

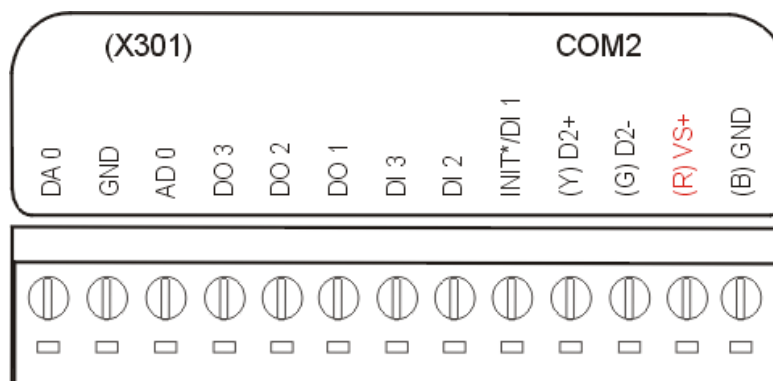


Wire Connection:

Voltage Input Wire Connection

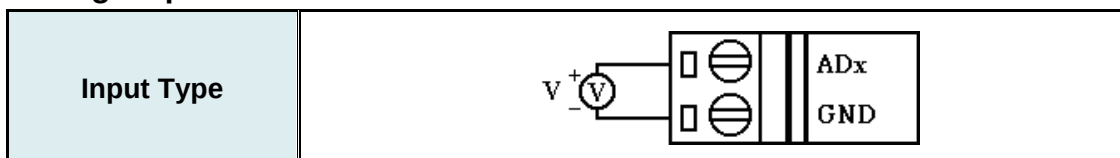

Voltage Output Wire Connection

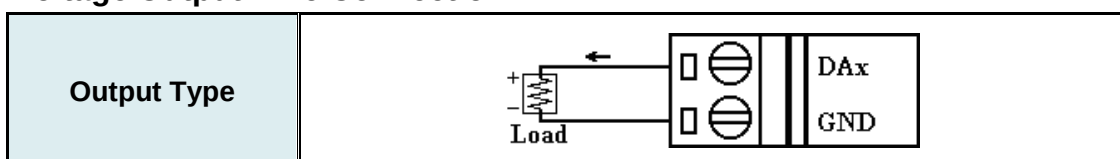

Programming:**for I-7188XC**

http://ftp.icpdas.com/pub/cd/8000cd/napdos/7188xabc/7188xc/demo/bc_tc/xboard/

Manual:

<http://ftp.icpdas.com/pub/cd/8000cd/napdos/xboard/document/>

Technical Service:

service@icpdas.com