
X324 Release Note:

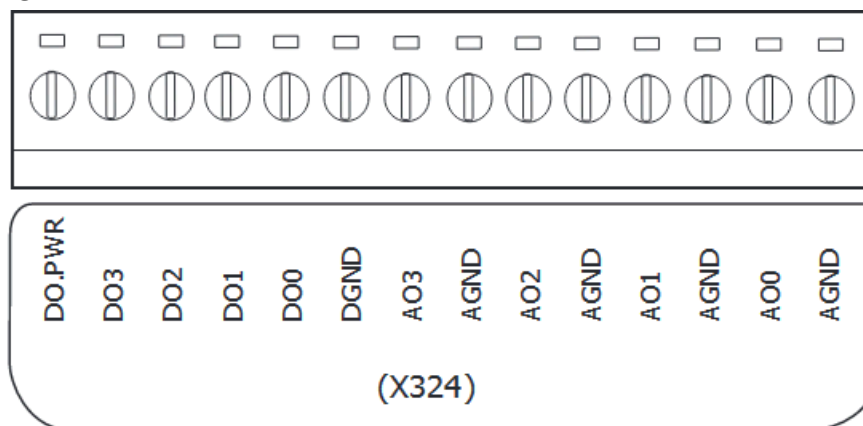
Supported Products:

I-7188XB/XG/EX/EG, uPAC-7186EX/EG/EX-FD/EX-SM, uPAC-7186PEX


Specifications:





Analog Output	
Channel	4
Range	0 ~ 5 VDC
Resolution	12-bit
Output Capacity	20 mA
Isolation	None
Digital Output	
Channel	4
Contact	Open Collector
Sink / Source (NPN / PNP)	Sink (NPN)
Load Voltage	+30 VDC Max.
Max. Load Current	100 mA Max.
Isolation	None

Pin Assignment:



Wire Connection:

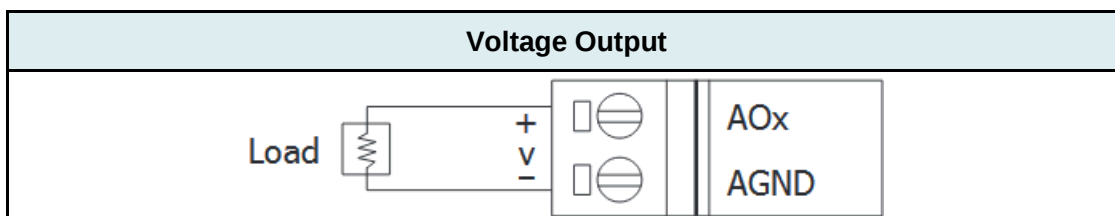

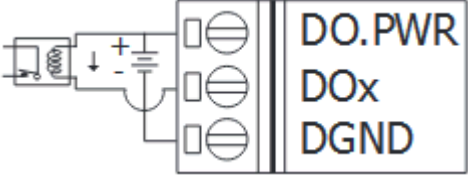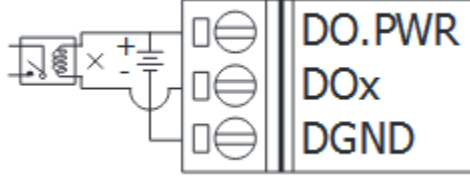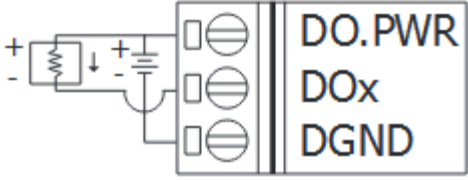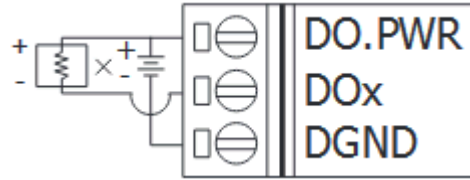Output Type	ON State DO value as 1	OFF State DO value as 0
Drive Relay		
Resistance Load		

Programming:

for I-7188XB

http://ftp.icpdas.com/pub/cd/8000cd/napdos/7188xabc/7188XB/Demo/BC_TC/Xboard/

for I-7188EX

http://ftp.icpdas.com/pub/cd/8000cd/napdos/7188e/demo/bc_tc/xboard/

for uPAC-7186EX

http://ftp.icpdas.com/pub/cd/8000cd/napdos/7186e/demo/basic/bc_tc/xboard/

for I-7188XG/I-7188EG (manual, Driver, Demo)

<http://ftp.icpdas.com/pub/cd/8000cd/napdos/isagrafi/>

Manual:

<http://ftp.icpdas.com/pub/cd/8000cd/napdos/xboard/document/>

Technical Service:

service@icpdas.com