

Packing List

In addition to this guide, the package includes the following items:



G-4510 Series



RS-232 Cable
(CA-0910)



Screwdriver



L-shaped side
fixing piece *2



M3 x 6L
screw *2

Technical Support


service@icpdas.com

www.icpdas.com

Resources

How to search for drivers, manuals and spec information on ICP DAS website.


- For Mobile Web

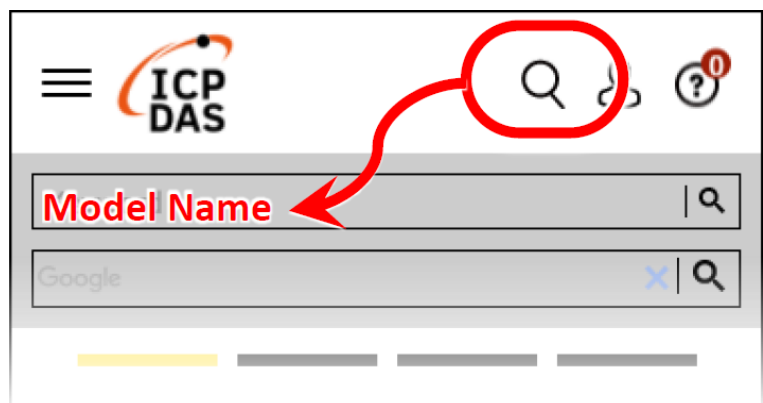

- For Desktop Web



Operation Mode Switch

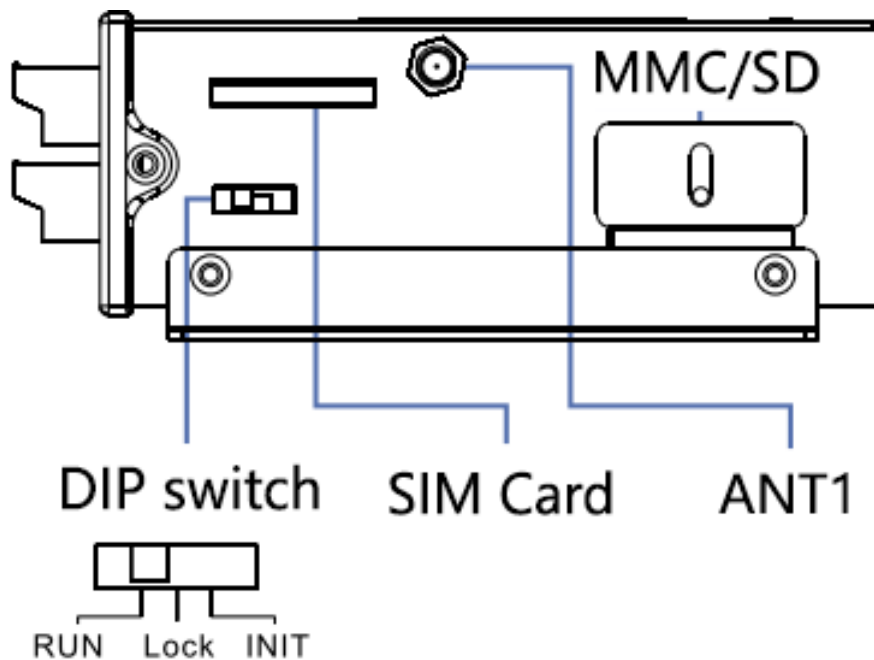


Operation Mode Switch	
RUN	OS can execute autoexec.bat
	Flash can be read/write.
Lock	OS can execute autoexec.bat
	Flash is read only (lock).
INIT	OS can not execute autoexec.bat
	Flash can be read/write.


Item	Default
IP Address	192.168.255.1
Subnet mask	255.255.0.0
Gateway	192.168.0.1

Communication module assembly

Step 1

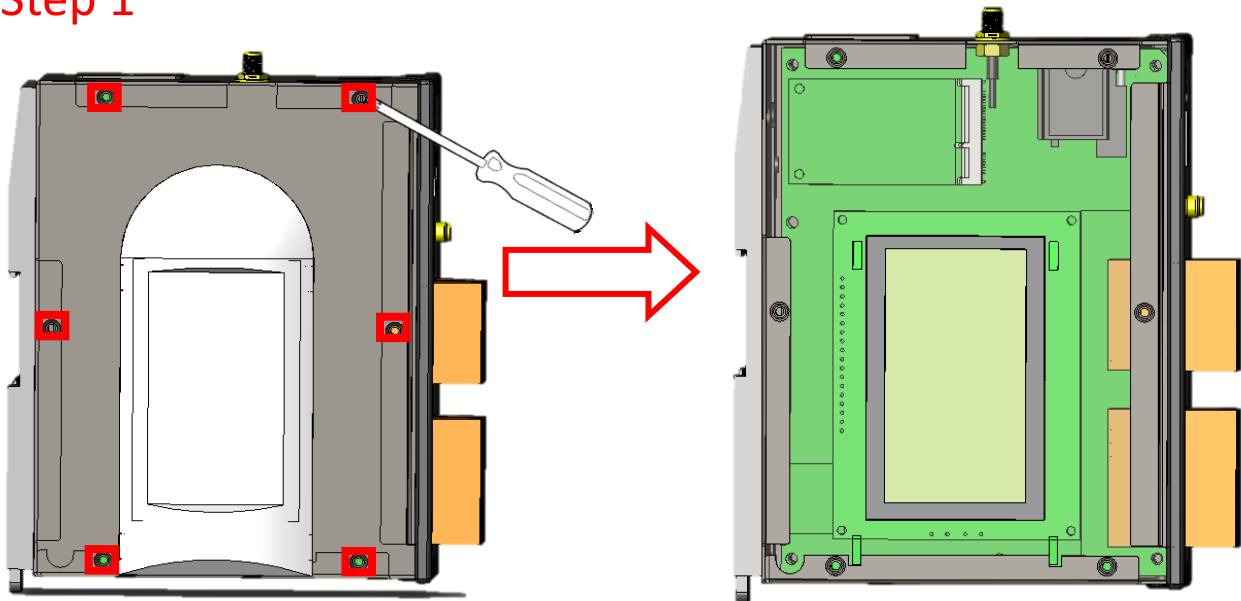

Step 2

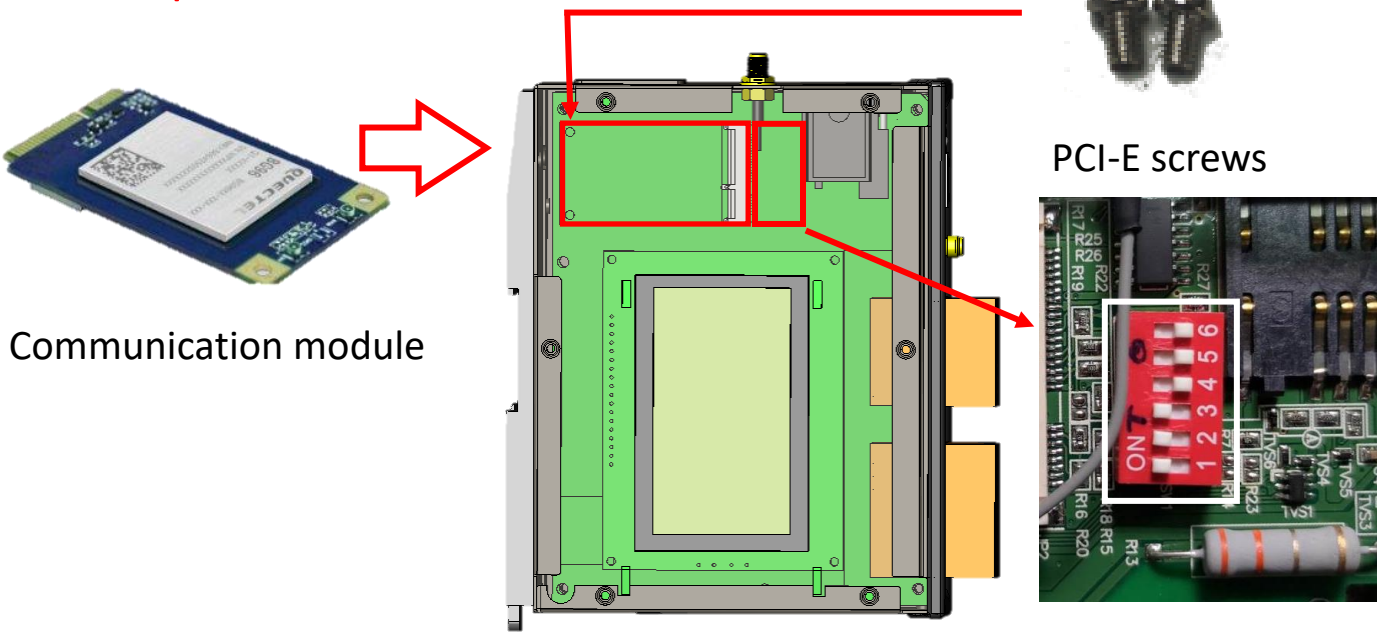


Communication module

PCI-E screws

EC2x Series · BG9x Series	LE910Cx Series
Switch Position	Switch Position
1、2、3 OFF	1、2、3 ON
4、5、6 ON	4、5、6 OFF
	

Step 3

➤EC2x Series 、BG9x Series

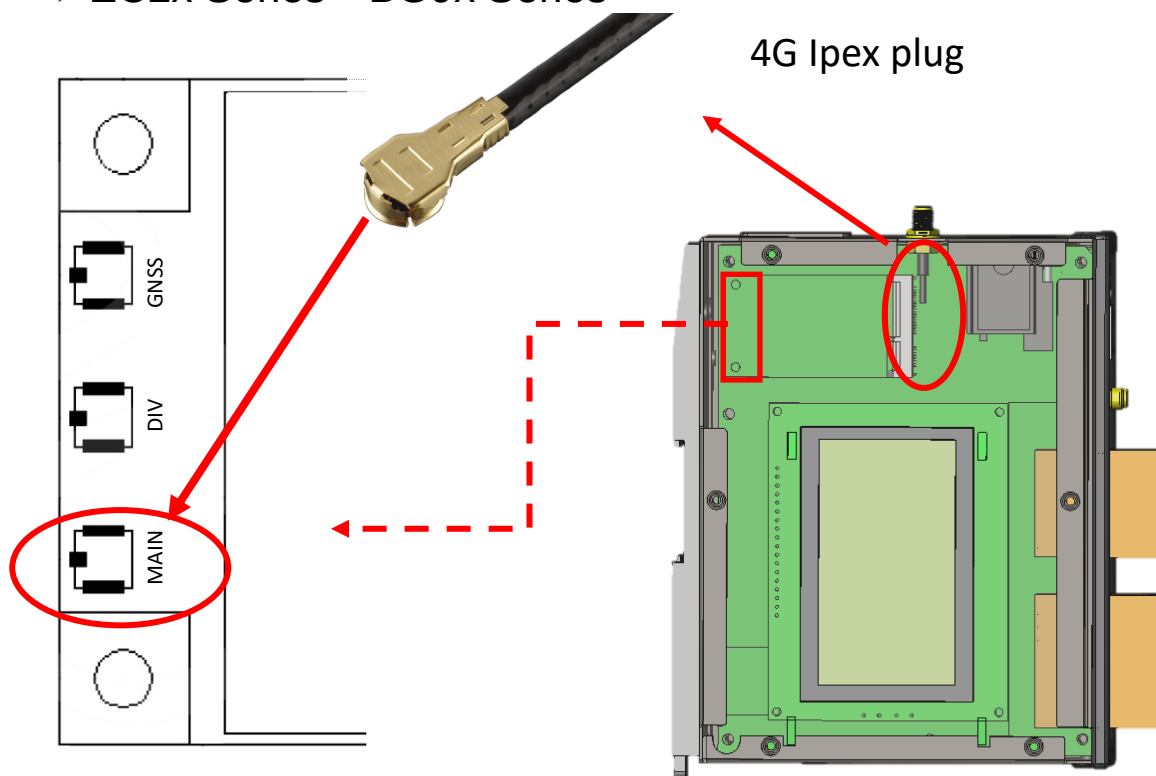

➤LE910Cx Series

