



DL-300-WF-IP65 Series Quick Start

V2.0, Sep 2020

Packing List

In addition to this guide, the package includes the following items:



DL-300-WF-IP65



IP67 Power Plug * 2



IP67 RJ45 Plug

Resources


How to search for drivers, manuals and spec information on ICP DAS website.

Technical Support

service@icpdas.com

www.icpdas.com

- For Mobile Web

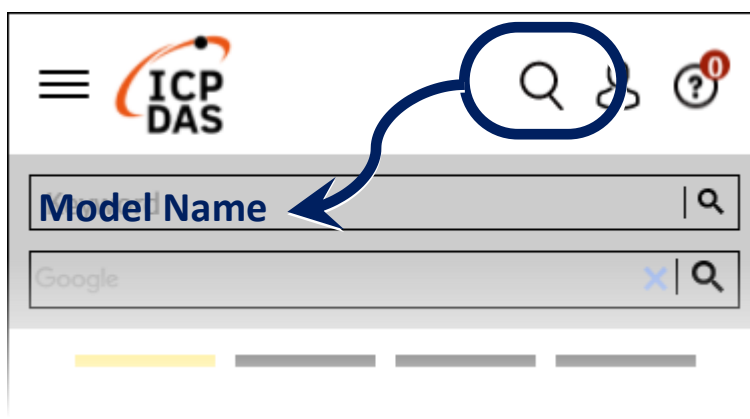

- For Desktop Web



ModelName | Q


Google

X | Q



PRODUCTS SOLUTIONS NEWS & EVENTS SUPPORT CORPORATE

Connector for Power/ RS-485/ Alarm Relay Output

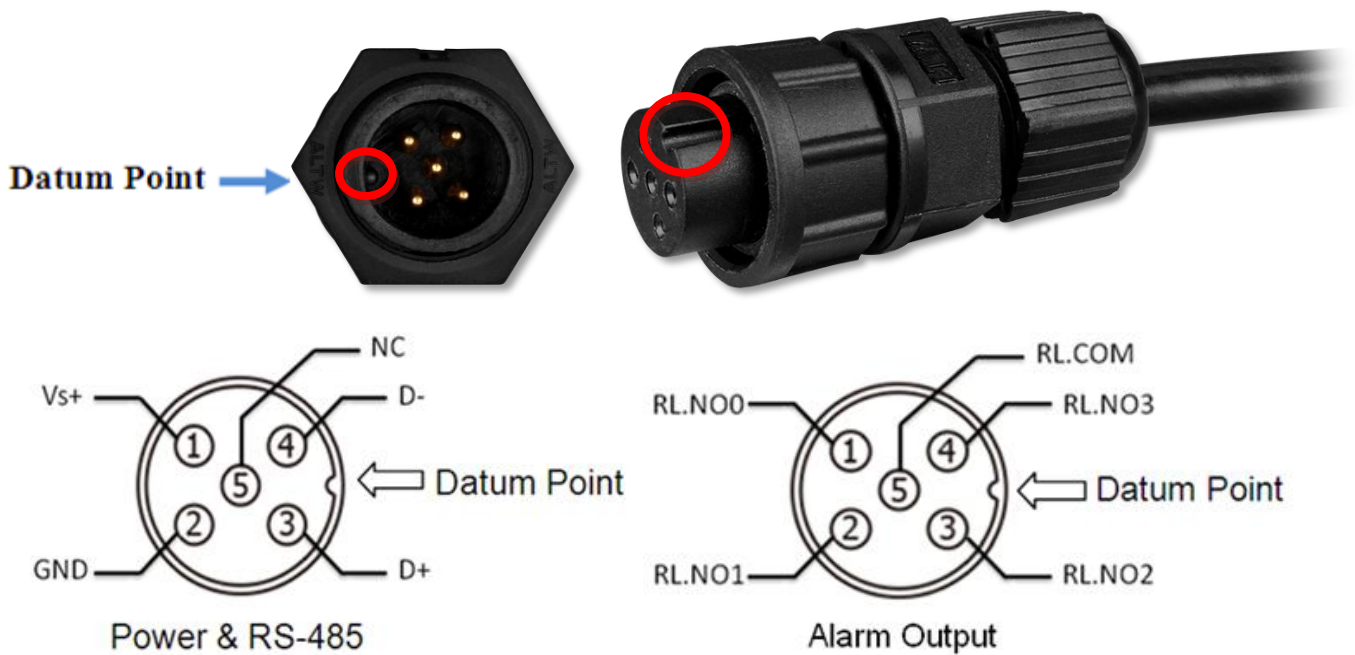

Powering-on the DL-300-WF-IP65 logger

The factory default settings for Wi-Fi communication of the DL-300-WF-IP65 are as follows.

- Mode: **AP**
- Wireless Security: WPA/WPA2, "00000000"
- DHCP Server (AP Mode): DHCP Server on, start IP: 192.168.255.2
- Wi-Fi Channel (AP Mode): 11
- IP Address: 192.168.255.1
- Gateway Address: 192.168.255.254
- Subnet Mask: 255.255.0.0
- SSID: DL-300-WF-IP65
- Modbus TCP Port: 502

The Wi-Fi IIOT Utility is provided to configure and test the DL-300-WF-IP65 module through the Wi-Fi interface. Please refer to chapter 6 of the user manual for details.

You can also use a browser to configure and test the DL-300-WF-IP65 module through the Ethernet interface. Please refer to chapter 4 of the user manual for details.