

Packing List

In addition to this guide, the package includes the following items:



CAN-2026C/D



Screw Driver

Technical Support


service@icpdas.com

www.icpdas.com

Resources

How to search for drivers, manuals and spec information on ICP DAS website.


- For Mobile Web

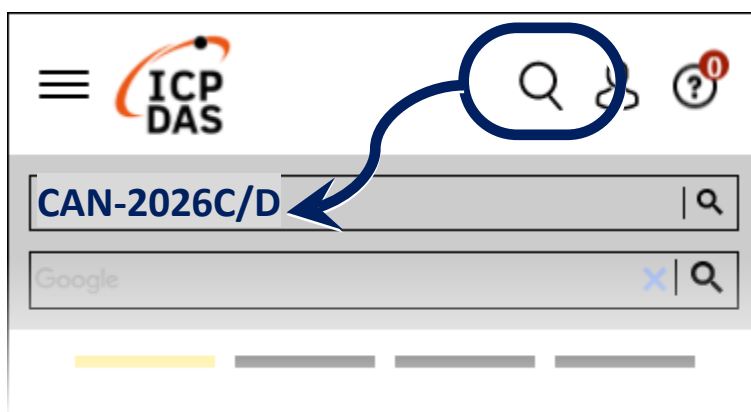

- For Desktop Web

1 Node ID, baud rate and terminal resistance

According to the user's requirements for CANopen/DeviceNet network, set the node ID and CAN baud rate of this module on the CANopen/DeviceNet network. If the module is located at the terminal of the network, according to the standard CANopen/DeviceNet network specification, this module must enable the terminator resistance.

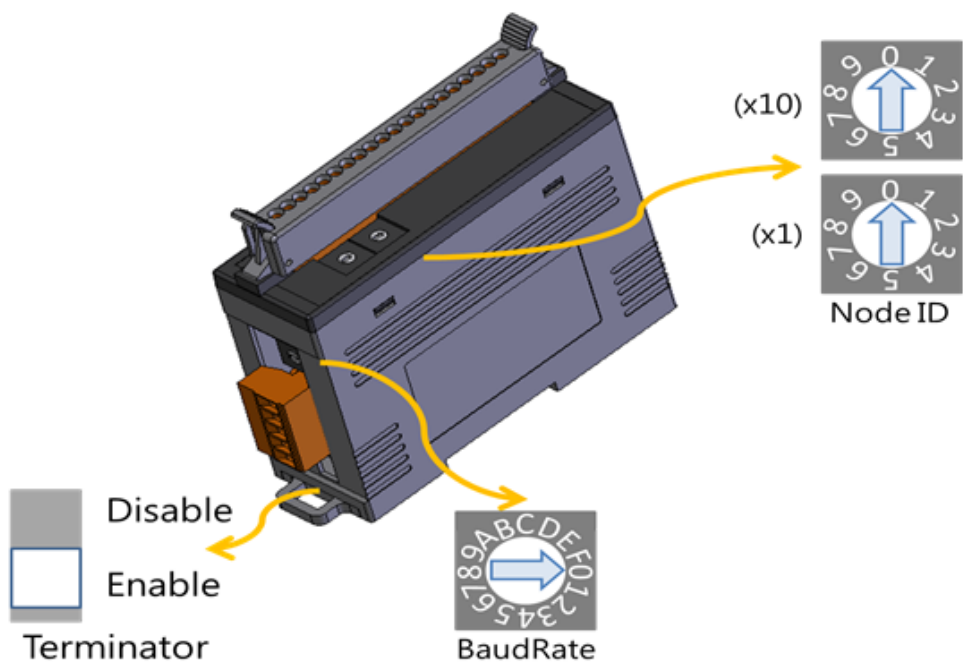

CAN-2026C


BaudRate Rotary Switch	BaudRate (k bps)
0	10
1	20
2	50
3	125
4	250
5	500
6	800
7	1000

CAN-2026D


BaudRate Rotary Switch	BaudRate (k bps)
0	125
1	250
2	500

2 I/O channel connection


Voltage Input

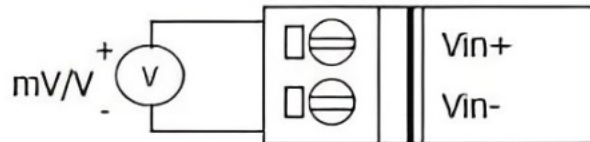

Current Input

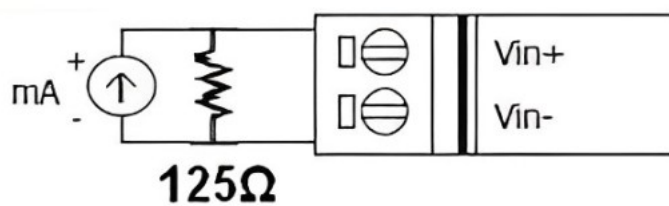


Voltage Output

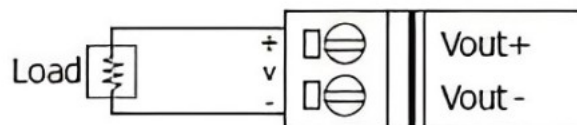


Digital Input/ Counter	ON State Readback as 1	OFF State Readback as 0
Wet Contact (Sink)		
Digital Output	ON State Readback as 1	OFF State Readback as 0
Open Collector (Sink)		

3 CAN port connection

2-wire Connection

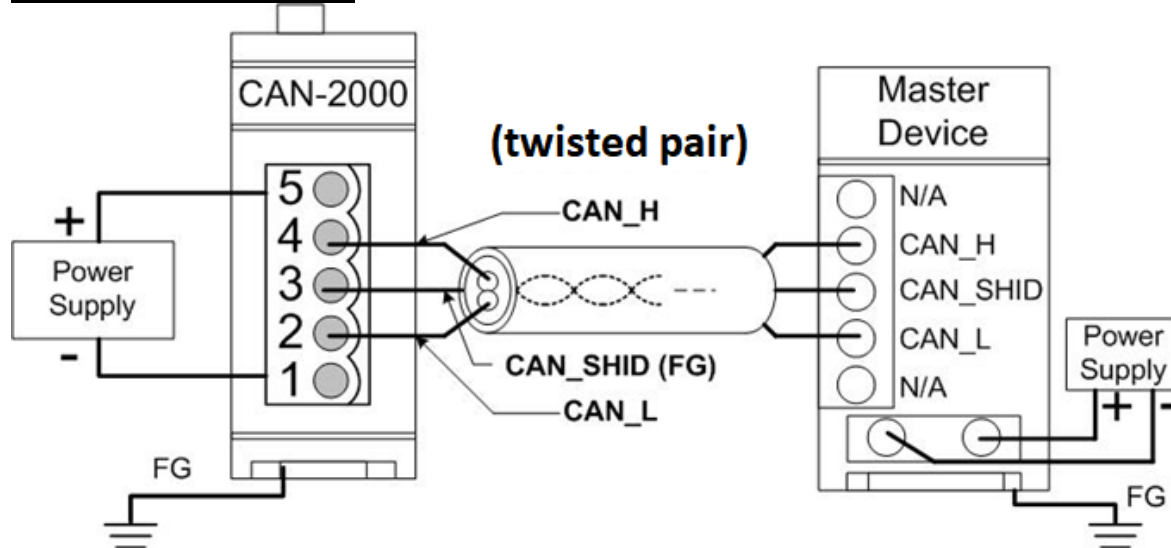

3-wire Connection

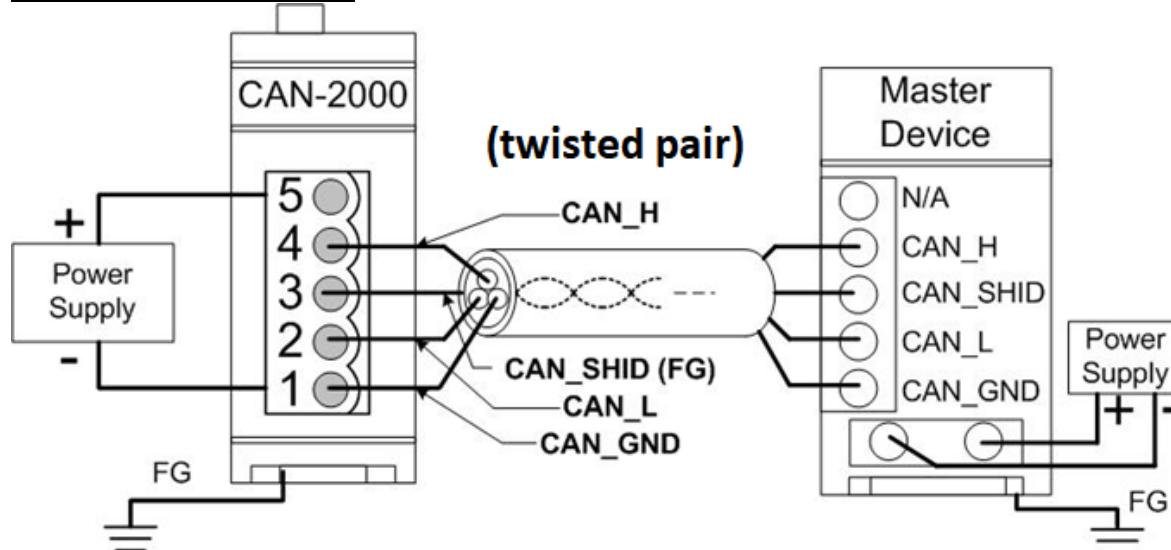

4-wire Connection

