

Packing List

In addition to this guide, the package includes the following items:



iSN-703-F1-L015



iSN-703-MBase01
(Optional)

Technical Support


service@icpdas.com

www.icpdas.com

Resources

How to search for drivers, manuals and spec information on ICP DAS website.

- For Mobile Web

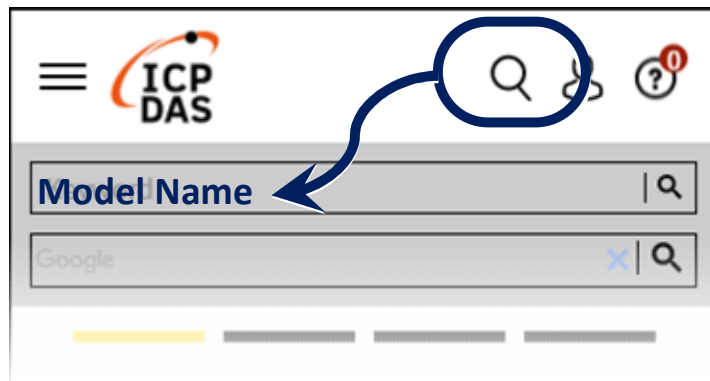

- For Desktop Web





➤ Wire Connection

Triaxial Accelerometers



Wire Color	Function
Red	V+
White	X-axes
Blue	Y-axes
Yellow	Z-axes
Green	N/C
Black	GND

➤ Dimensions

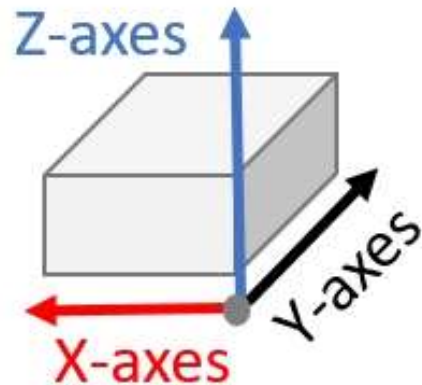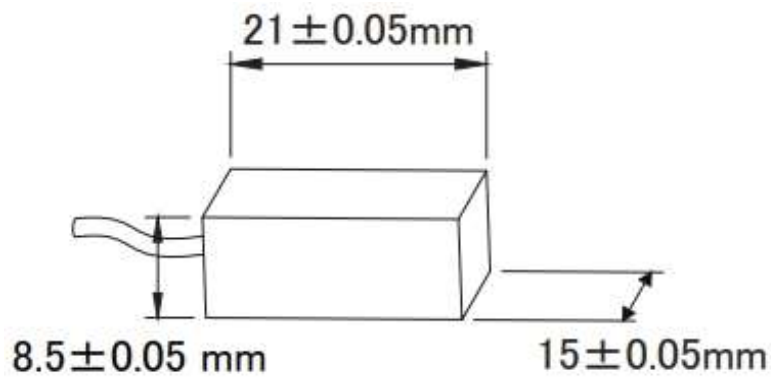

➤ Specifications

Vibration Measurement	
Sensor Type	MEMS
Range	±18g
Sampling Rate	10Hz~1KHz
Sensitivity	400mV/g per axis
Bias Voltage	10±0.5VDC
Power	
Input Range	22~26VDC, 3mA
Cable	
Length	1.5m