

Packing List

In addition to this guide, the package includes the following items:



LP-2841M



CA-0910 Cable



microSD card



Wire Terminal * 16



Screw Driver

Resources


How to search for drivers, manuals and spec information on ICP DAS website.

Technical Support

service@icpdas.com

www.icpdas.com

• For Mobile Web

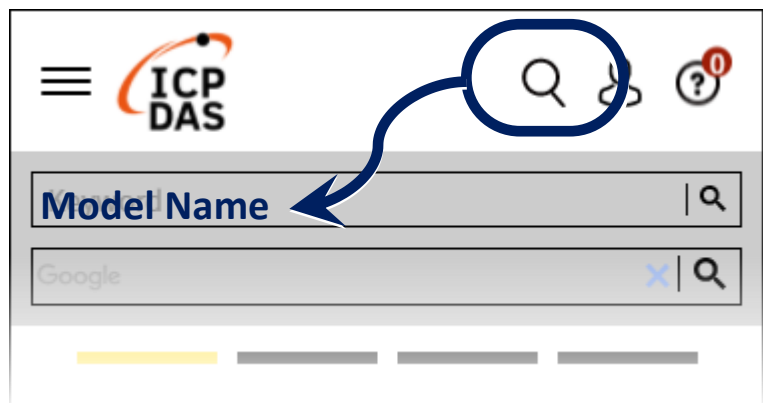

• For Desktop Web



1. Preparations for Device

Step 1: Power Supply: +12 ~ +48 VDC

Step 2: Ethernet Hub or Switch

Step 3: PC/NB: Can connect to the network and set the network


2. Hardware Connection

Step 1: Connect the positive terminal (+) of the power supply to the terminal PWR and the negative terminal (-) of the power supply to the P.GND.

Step 2: Connect the USB mouse or the USB keyboard to the USB port.

Step 3: Connect the monitor to the VGA port.

Step 4: Connect to PC or the laptop to the LAN port via an Ethernet switch.

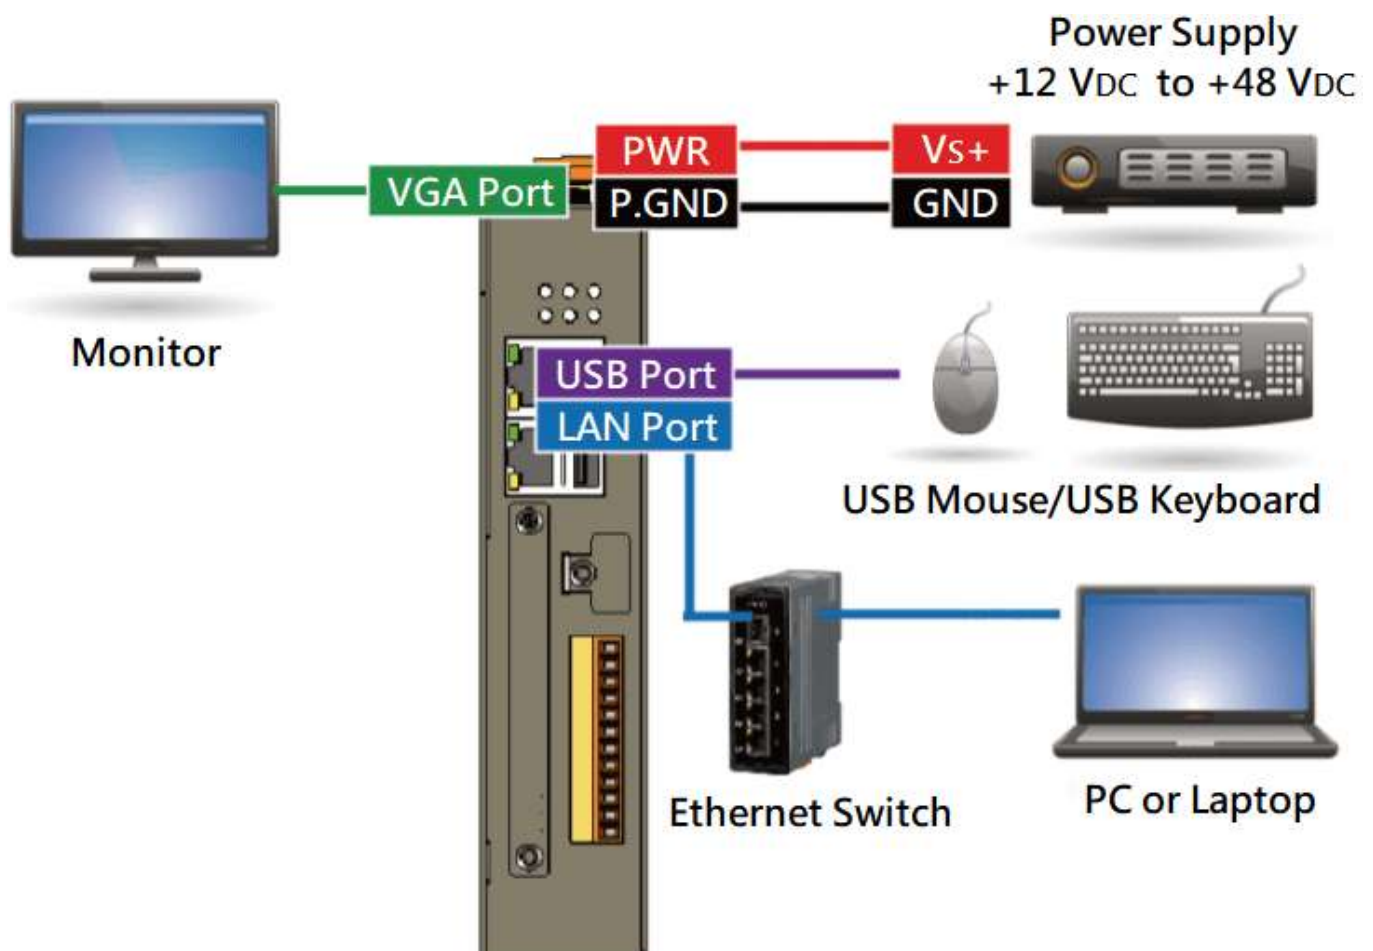

3. Network Connection

Interface	LAN1 (eth0)	LAN2 (eth1)	User ID: root Password: icpdas
IP	DHCP	DHCP	