

Packing List

In addition to this guide, the package includes the following items:




NS-205A

Resources

How to search for drivers, manuals and spec information on ICPDAS website.

- For Mobile Web

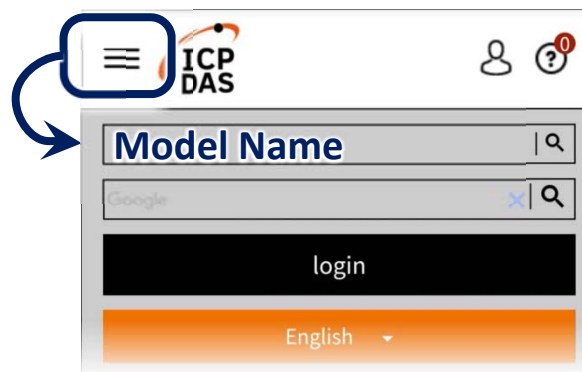


- For Desktop Web



LED Indicator Functions

LED	Color	State	Description
PWR	Red	On	Power
		Off	Power is disconnect
Port1~5	Orange	On	Speed 100 Mbps
		Off	Speed 10 Mbps
	Green	On	Link/Act

Pin assignment

Pin	Terminal	Function
F.G		Frame Ground.
GND		Power Ground.
+VS		+12 ~ +56 VDC

Broadcast Storm protection :

NS-205A has BSP (Broadcast Storm Protection) Function , this Function can protect your Ethernet device disturbed from Broadcast , If Switch detection Broadcast packet over 100 par second, Switch will drop the excess part to protect communication.

Note: BSP function will Enable/Disable after reset the power

Dimensions : (Units:mm)

