

Packing List

In addition to this guide, the package includes the following items:



CAN-2057C/D-32



Screw Driver

Technical Support

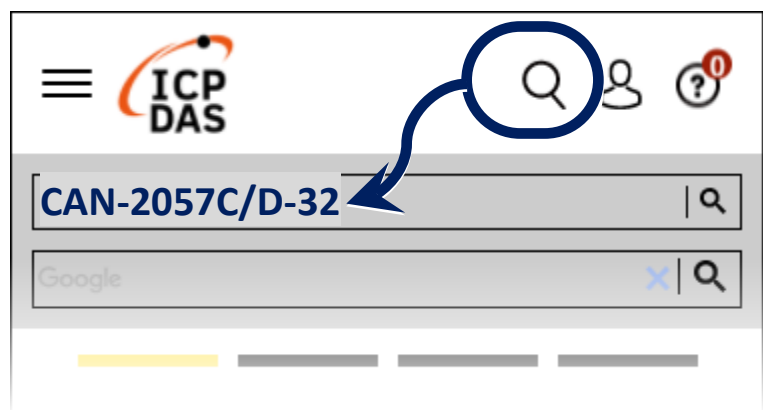
service@icpdas.com

www.icpdas.com

Resources

How to search for drivers, manuals and spec information on ICP DAS website.

- For Mobile Web



- For Desktop Web

1 Node ID, baud rate and terminal resistance

According to the user's requirements for CANOpen/DeviceNet network, set the node ID and CAN baud rate of this module on the CANOpen/DeviceNet network. If the module is located at the terminal of the network, according to the standard CANOpen/DeviceNet network specification, this module must enable the terminator resistance.

(x1)

(x10)

Node ID

Enable





Disable





Terminator

Baud Rate

Rotary Switch	CANOpen Pair Connection	CANOpen Baud (k bps)	DeviceNet Baud (k bps)
0	8	10	125
1	9	20	250
2	A	50	500
3	B	125	-
4	C	250	-
5	D	500	-
6	E	800	-
7	F	1000	-

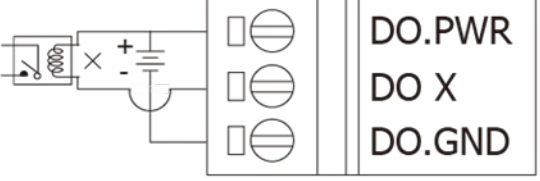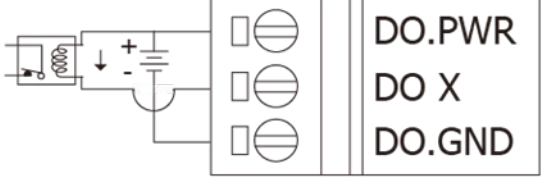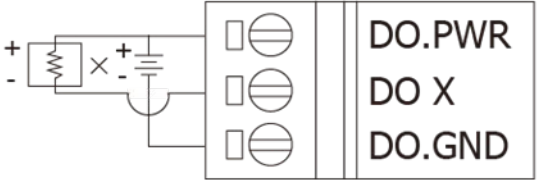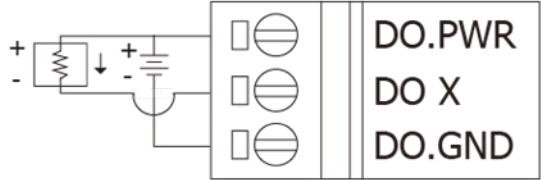
2 I/O channel connection

Module Name	CAN-2057C-32	
Output Type	ON State LED ON Readback as 1	OFF State LED OFF Readback as 0
Drive Relay	Relay Off	Relay ON
		
Resistance Load		

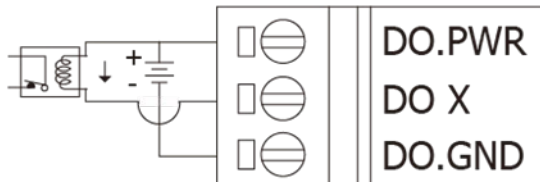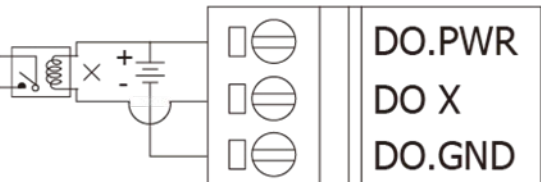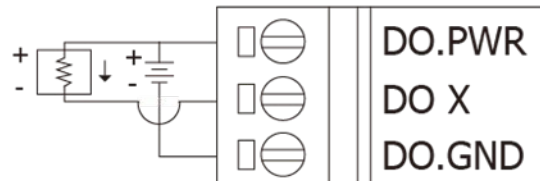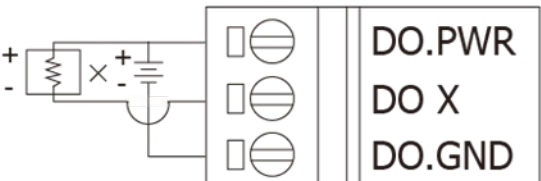
Module Name	CAN-2057D-32	
Output Type	ON State LED ON Readback as 1	OFF State LED OFF Readback as 0
Drive Relay	Relay ON	Relay Off
		
Resistance Load		

3 CAN port connection

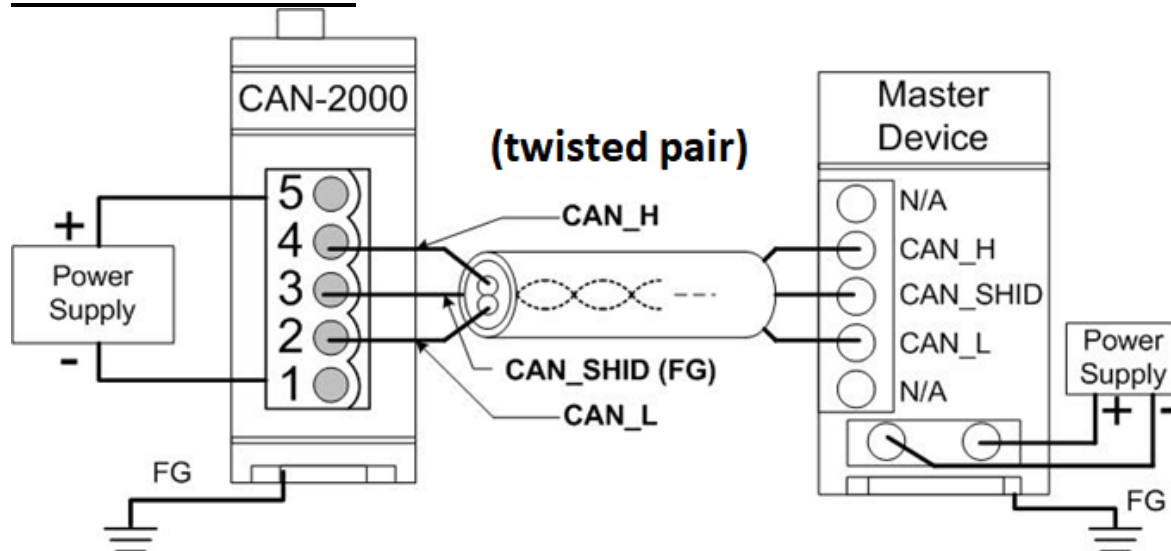2-wire Connection



3-wire Connection

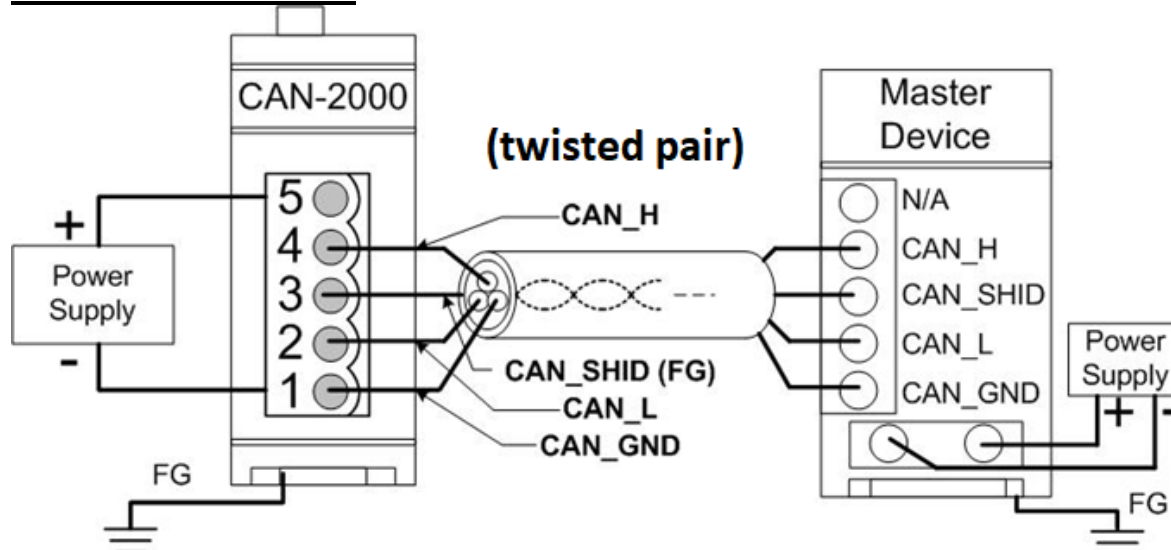

4-wire Connection

