


Introduction

The LinPAC controller supports N-Port modules, such as I-8112iW, I-8114W, I-8144iW, etc., with each module providing multiple serial ports. In this way, additional serial ports can be used in the LinPAC-8000 with the maximum number of serial ports available in the LinPAC-8000 expanded to 34. The LinPAC-8000 is a multi-tasking unit, therefore all the serial ports can be controlled simultaneously.



To get more RS-232/485/422 ports, user can plug one or more “multi serial port module” in the I/O slot.

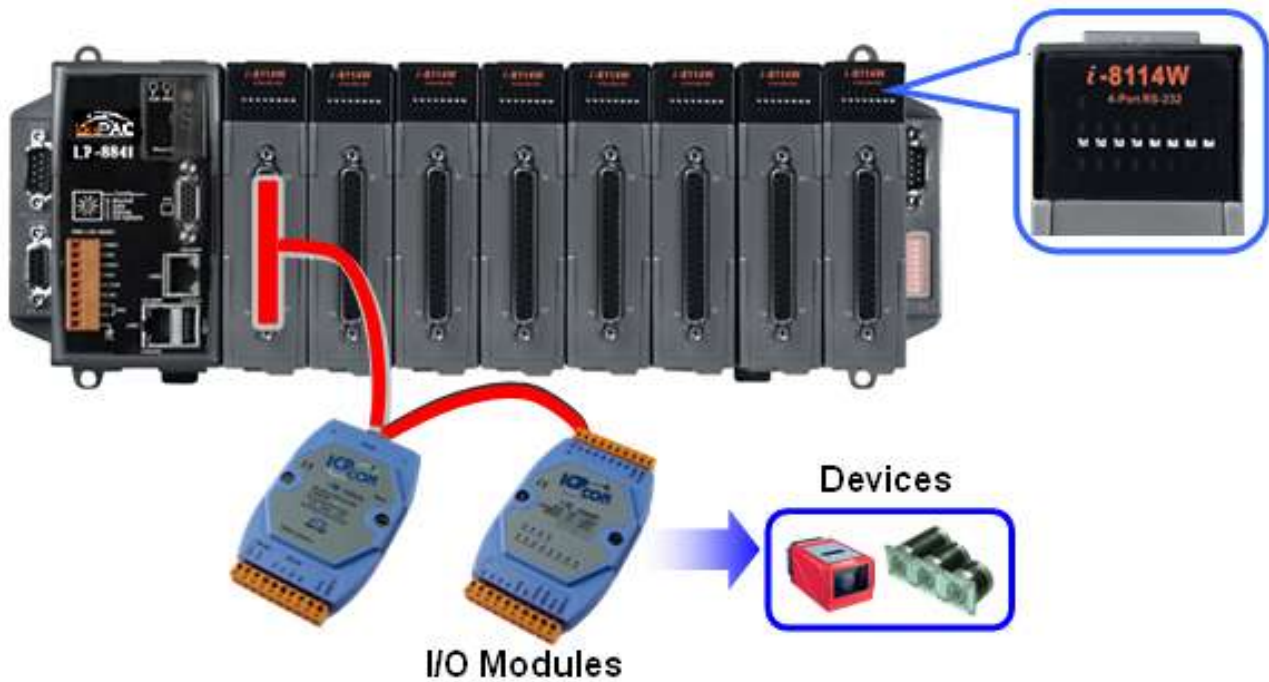

ITEM	RS-232	RS-422/485	Isolation	Connector
I-8112iW	2	—	2500 Vrms	DB-9 x 2
I-8114W	4	—	—	DB-37 x 1
I-8114iW	4	—	2500 Vrms	DB-37 x 1
I-8142iW	—	2	2500 Vrms	Terminator
I-8144iW	—	4	2500 Vrms	block x 1

