



RPS-4M/W4

4-slot Industrial Redundant Power Supply.
Includes four RPS-100 modules

Features

- Convert 90~264 VAC to 24 VDC
- Each slot can insert a 100W power module
- Power module supports hot swapping
- 4-slot design for N+1 Redundant
 - Built-in load balancing and power diagnosis functions
 - Temperature monitoring of power module
 - Current monitoring
 - Power module failure (relay output)
 - Used time of Power module
- Support Modbus RTU/TCP Protocol




Introduction

The RPS series redundant power supply uses N+1 parallel current sharing (with Load Balancing) to achieve power backup and stable power supply, and supports hot swapping design. The RPS series provides communication functions for real-time monitoring, reducing inspection manpower.

- Each slot can plug in a 100W power module.
- 4-slot design for N+1 redundancy
 - The RPS can provide rated power of 3 power modules (300W) when 4 power modules are inserted.
 - The RPS can still supply power at all times when any power module fails. (Number of inserted modules > 1)
- The RPS can also record the using time of power module, which can be used as a basis for maintenance and replacement.




Exterior

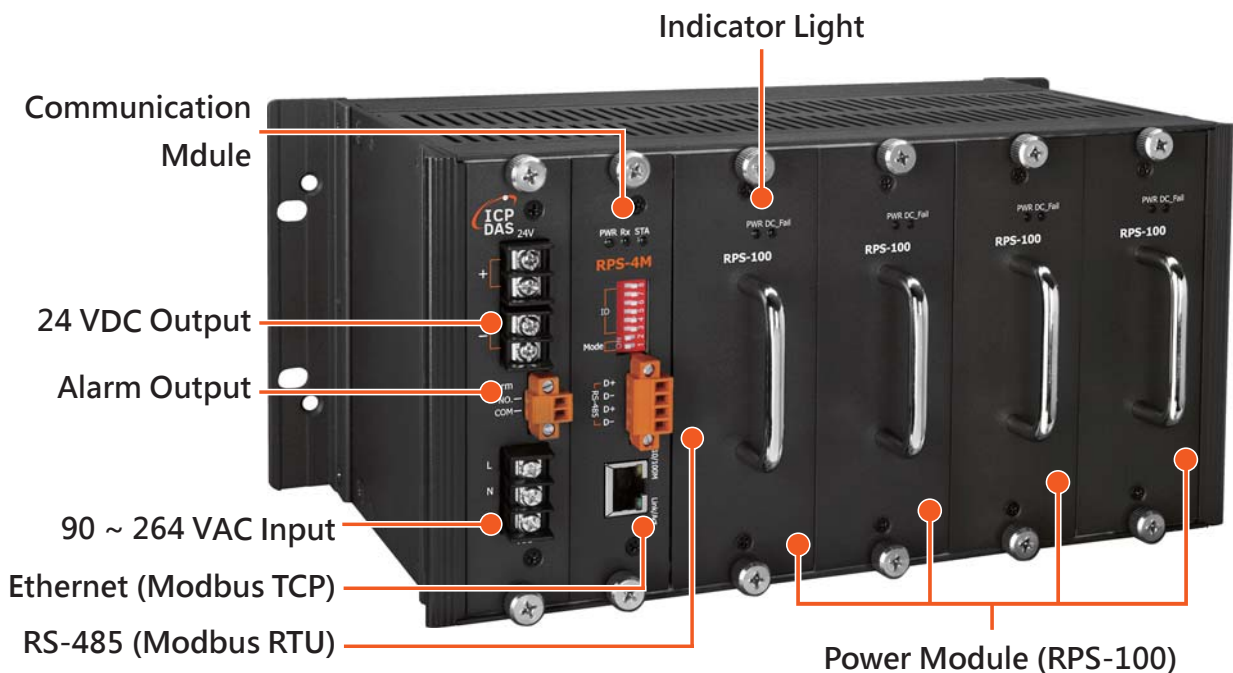


Applications

The RPS series can be used with ICP DAS's redundant solutions, including I/O redundancy (data acquisition), controller redundancy (program control), ethernet ring communication redundancy (ring network communication) and HMI redundancy (display information record) to form a complete redundant system.

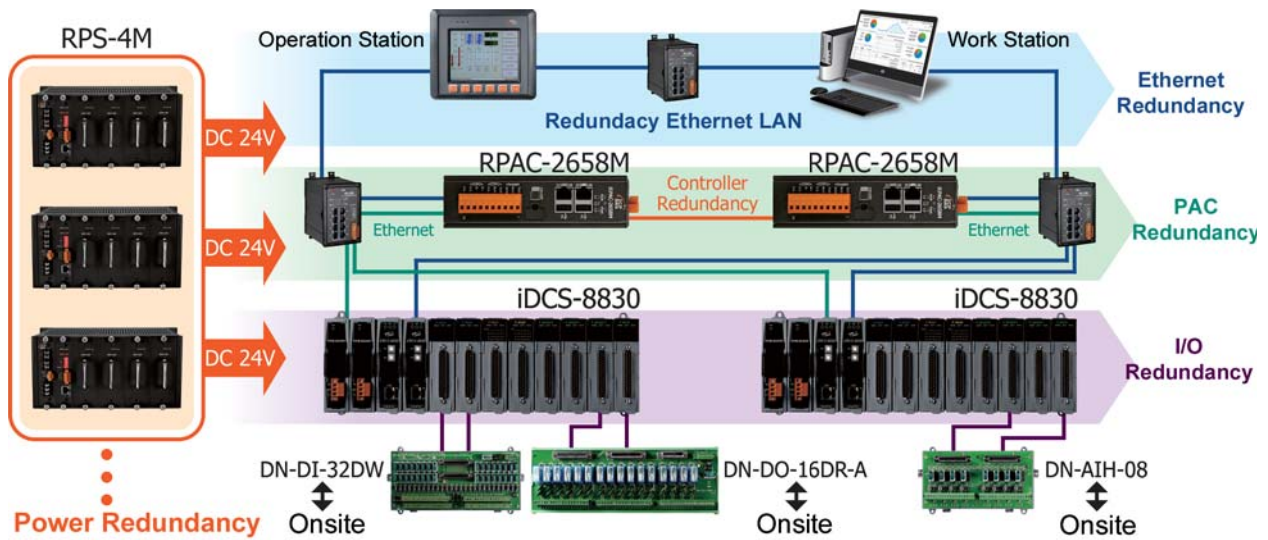

Dimensions (Units: mm)

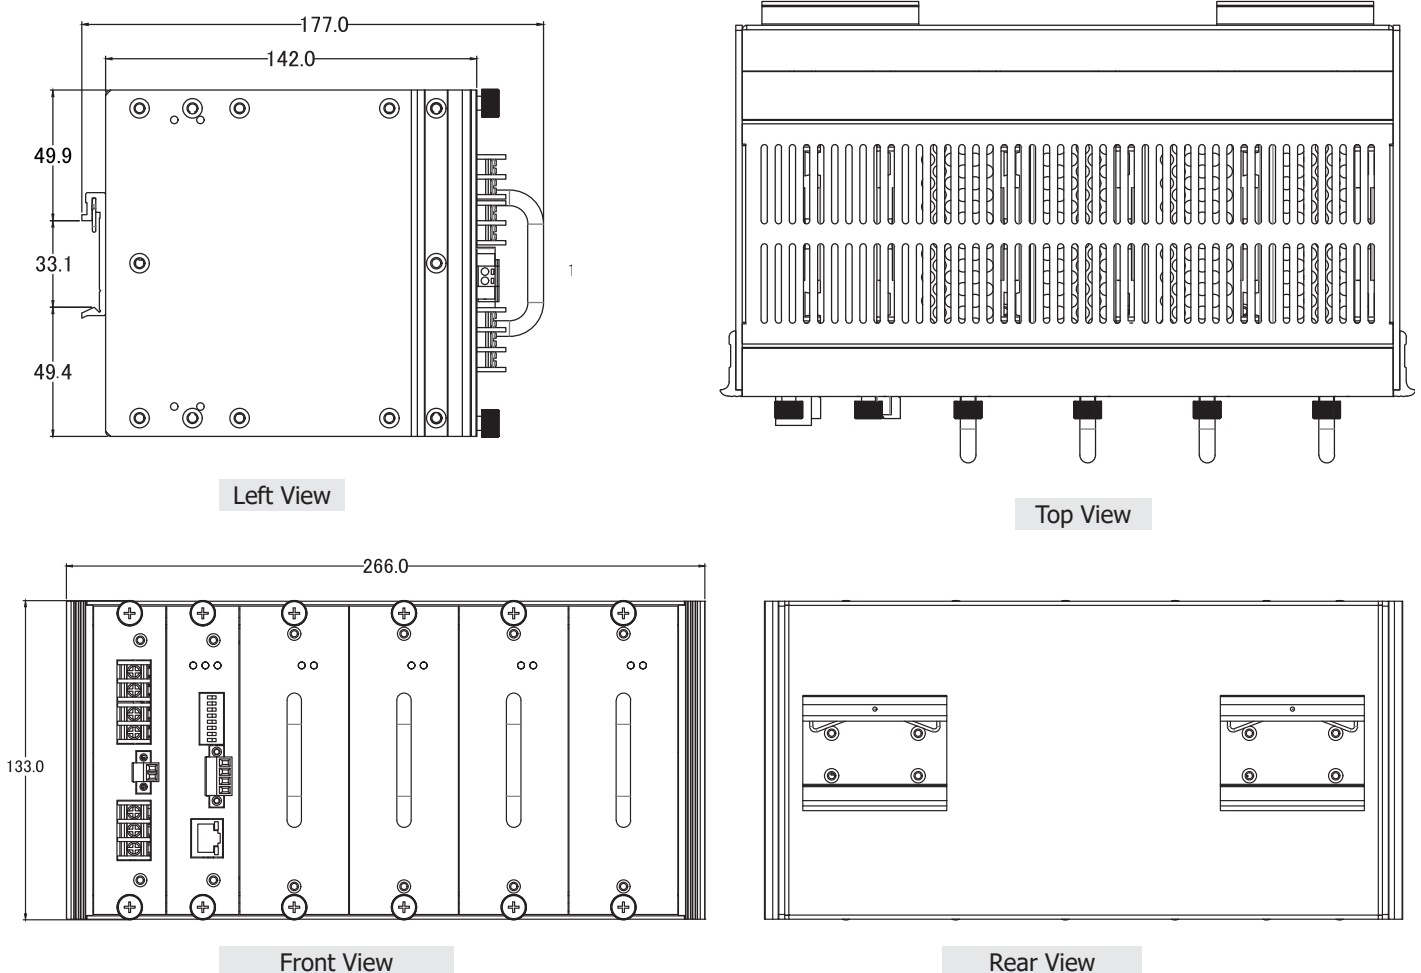

■ RPS-100(Power Module) Specifications

Output	
DC Voltage	24V
Rated Current	4.16A
Current Range	0 ~ 4.16A
Rated Power	100W
Ripple & Noise(max.)	50mVp-p
Voltage Tolerance	±1.0%
Line Regulation	±1.0%
Load Regulation	±5.0%
Setup, Rise Time	1300ms,120ms at full load
Hold Up Time(Typ.)	40ms at full load
Input	
Voltage Range	90~264VAC
Frequency Range	47 ~ 63Hz
Power Factor(Typ.)	PF=0.961/230VAC at full load, PF=0.985/115VAC at full load
Efficiency(Typ.)	86%
AC Current(Type)	1.01A/115VAC 0.51A/230VAC
Inrush Current	COLD START 30A/115VAC 60A/230VAC
Leakage Current	Earth<3.5mA ,Touch<0.25mA
Protection	
Overload	110%~200% (Automatic recovery)
Over Voltage	26.4~31.2 (Automatic recovery)
Environment	
Working Temperature	-20~50°C
Working Humidity	5~95%RH Non-condensing.
Storage Temperature, Humidity	-40~85°C
Vibration	0.26~6.09 G Frequency Type: Sweep Frequency Frequency Range: 10~55 Hz Displacement: 1.0mm Sweep Rate: 60 minute / cycle Number of cycle: 1 cycle / axis Direction: X ,Y and Z axis
MTBF	100K (hours@25°C)
Safety & EMC	
Safety Standards	Design to meet 62368
Withstand Voltage	I/P-O/P:3KVAC I/P-FG:1.8KVAC O/ P-FG:0.5KVAC
Isolation Resistance	I/P-O/P, I/P-FG, O/P-FG:>100M Ohms / 500VDC
EMC Emission	EN 55032 CISPR 32 & FCC Part 15 B CLASS B : System with 4 module in parallel
EMC Immunity	EN 55022, CISPR 22 & FCC Part 15, EN 61000-3-2, EN 61000-3-3, EN 61204-3 IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4- 6, IEC 61000-4-8, IEC 61000-4-11

■ Ordering Information

RPS-4M/W4	4-slot Industrial Redundant Power Supply. Includes four RPS-100 modules (RoHs)
------------------	--------------------------------------------------------------------------------

■ Accessories

RPS-100	Industrial Redundant Power Supply 100W Power Module
----------------	-----------------------------------------------------

■ RPS-4M(System)Specifications

COM Port		
Interface	RS-485	
Protocol	Modbus RTU	
Data Format	N,8,1 / O,8,1 / E,8,1 / N,8,2	
Baud Rate	Hardware Configuration: Fixed 9600 bps Software Configuration: 1200 ~ 115200 bps	
Node Address	1 ~ 64 for hardware configuration 1 ~ 255 for software configuration * For Modbus RTU, address 0 is auto become to 1	
Connector	4-pin screw terminal	
Ethernet		
Interface	1 x RJ-45, 10/100 Base-TX	
Protocol	Modbus TCP server, Web server	
Access Control	Password and IP Filter	
Measurement		
Current	Range	0A ~ 5 A
	accuracy	±0.25A
Temperature	Range	0°C ~ 100°C
	accuracy	±5°C
LED Indicators		
Power	1 LED as power indicator	
Communication	1 LED as Modbus Rx indicator	
Status	1 LED as status indicator	
EMS Protection		
ESD (IEC 61000-4-2)	±4 kV Contact, ±4 kV Air	
EFT (IEC 61000-4-4)	±2 kV for power line	
Surge (IEC 61000-4-5)	±2 kV for power line	
Power Requirements		
Input Voltage Range	90~264VAC, 47 ~ 63Hz	
Connector	3-pin screw terminal	
Mechanical		
Dimensions (W x L x H)	133 mm x 266 mm x 177 mm	
Installation	DIN-Rail	
Environment		
Operating Temperature	-20°C ~ +50°C	
Storage Temperature	-40°C ~ +85°C	
Humidity	10 to 90% RH, Non-condensing	