



ACS-11P-MF/ACS-11P-MF-TC

Access Control Reader with proximity card and keypad

Features

- Supports Keypad and RFID induction control.
- Supports Card Type: Mi fare Classic, Ultralight, DESFire.
- Built-in Voice Message Function.
- Supports Ethernet/RS-485 Interface.
- Built-in RTC and WDT.
- Electric Door Lock Control and Door Position Detection.
- Provides Access Records.
- Max Card Capacity : 8192 Cards.
- Supports Elevator Floor Control (Max. 16 F).



Introduction


Access Control systems are one of the most important infrastructures for a safe, secure society. ACS-11P-MF is an access control reader that supports keypad and RFID induction of access control. It integrates three functions of door access control, voice guidance and floor control all in one, suitable for use in community door access and elevator control. ACS-11P-MF supports Ethernet and RS-485 communication interface and provides anti-sabotage sensor and door position detection function which can consolidate the security of access control systems and effectively enhance the service quality of management.

Software Tool


ACS Config Utility provides quick and convenient communication with the access control reader. Customers can be easily downloaded access cards list, corresponding rights and read access records from/to the access control reader.

- Provides access card number and password add, modify, delete function.
- Provides access record inquiry function.

Dimensions (Units: mm)

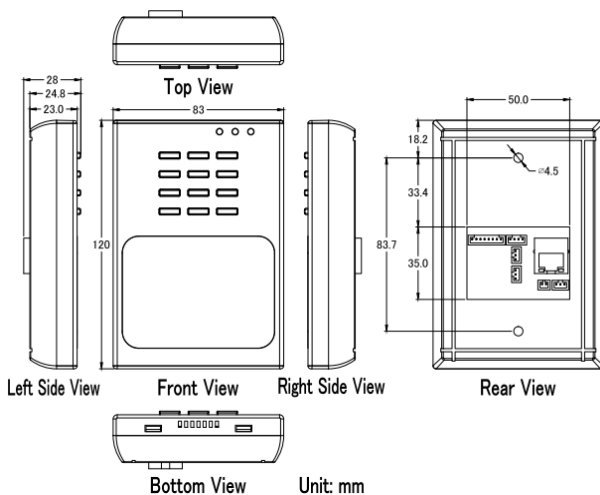

Wire Connection

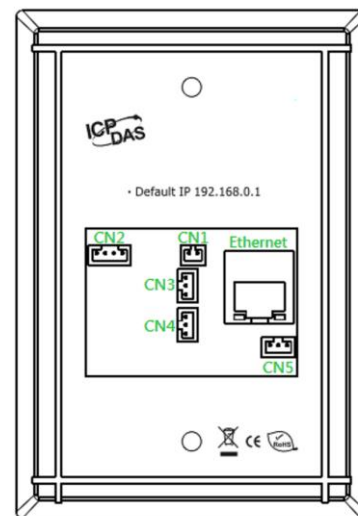


Connector Type	Pin Assignment				Description
CN1	D+		D-		RS-485(D+/D-) Baud Rate (bps): 9600 Parity: NONE Data Bits: 8 Stop Bits: 1
CN2	DI0	G	DI1	G	DI0(Door position detection) DI1(Electric lock trigger) (Digital Input, Dry Contact)
CN3	NC				Electronic lock control (Relay Output)
	COM				
	NO				
CN4	NC				Door position alarm output (Relay Output)
	COM				
	NO				
CN5	COM	NO	NC		Anti-sabotage detection (Relay Output)

Specifications

UART		
COM	RS-485(D+, D-)	
Baud rate(bps)	9600	
Format	N, 8, 1	
Ethernet		
Controller	10/100Base-TX Ethernet Controller (Auto-negotiating, Auto MDIX)	
Connector	RJ-45 with LED indicator	
PoE	Yes	
Digital Input		
Channels	2	
Input type	Dry Contact (Source), Wet Contact (Sink, Source)	
Relay Output		
Channels	2	
Output Type	Form C	
Contact Rating	0.5A 120VAC / 2A 30VDC	
RFID		
Supported Card	Mi fare Classic, Ultralight, DESFire	
Standard	ISO 14443 A	
Voice		
Voice type	English	Chinese
Power		
Powered from PoE	IEEE 802.3af, Class1	
Power consumption	1.7W	
Mechanical		
Installation	Wall Mounting (Suitable for the outlet box in United States)	
Dimensions	83mm x 120mm x 28mm (W x L x H)	
Environment		
Operating Temperature	-20°C ~ +60°C	
Storage Temperature	-30°C ~ +80°C	
Humidity	10% ~ 90%, non-condensing	

Application

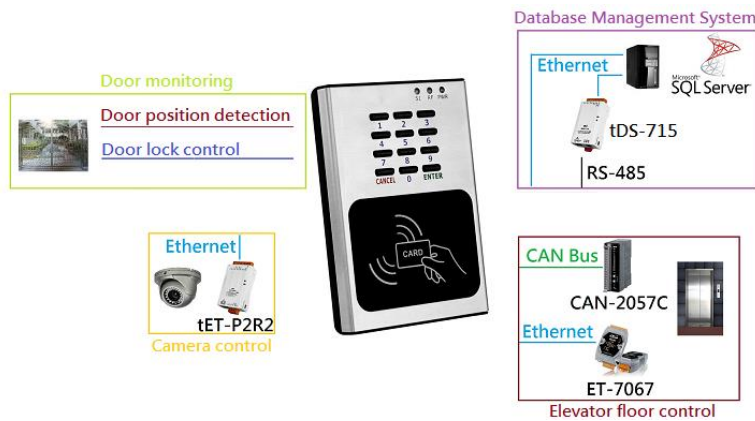

Ordering Information

ACS-11P-MF CR	Proximity Card Reader with Keypad for Access Control System (RS-485, Ethernet PoE) (English version of voice) (RoHS)
ACS-11P-MF-TC CR	Proximity Card Reader with Keypad for Access Control System (RS-485, Ethernet PoE) (Chinese version of voice) (RoHS)

Accessories

ET-7067 CR	Ethernet I/O Module with 8 Relay; for elevator floor control (RoHS)
tET-P2R2 CR	Tiny Ethernet module with 2 DI and 2 Form-A relay; for camera control (RoHS)
tDS-715 CR	Tiny Device Server with PoE and 1 RS-422/485 Port (RoHS)