



**iWSN-100X-CLE**

**iWN-101X-CLE**

iWSN Environmental Sensing Module (Asia Only)

## ■ Features


- Self-powered by built-in a chargeable Li-ion battery
- Split-core current transformer (CT) for easy installation
- Energy harvest from the CT induced electricity.
- Uses 433 MHz radio frequency for communication
- 16 RF Channels and 4 Group ID, consist of maximum 64 RF sub-networks
- Provides expansion interface for flexibility and extensibility
- Offers wall-mount mechanism and magnet for installation
- Provides two modes of power supply: CT induced current or DC power supply



## ■ Introduction

iWSN wireless environmental sensing series including wireless signal sensing and expansion module. By means of sub-1G RF communication interface, iWSN wireless environmental sensing module can approach to the real wireless deployment. It is suitable for measuring various signals such as temperature, humidity, CO<sub>2</sub>e, TVOC, CO and vibration, provides users more choices for various applications. iWSN wireless environmental sensing module provide two modes of power supply: CT induced current or DC power supply. Diverse power supply delivers reliable electricity and reduces the cost of wiring. Considering the maintenance and installation, the iWSN wireless environmental sensing module uses the DIP switch for configuration. Through the flexibility of the expansion interface, the iWSN wireless environmental sensing module can be widely used in the application of saving power, big data analysis, and predict maintenance.

## ■ Applications

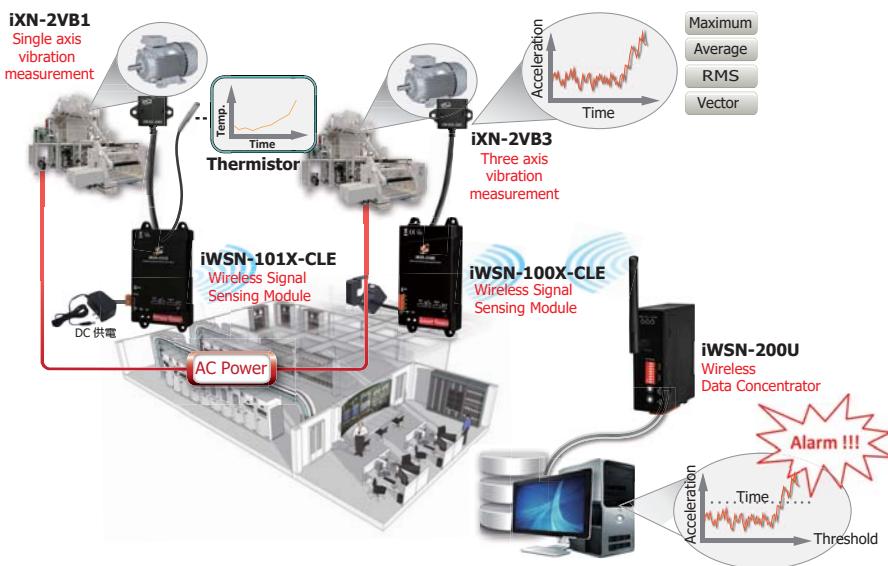


## ■ System Specifications

Model	iWSN-100X-CLE	iWSN-101C-CLE
<b>Bus Interface</b>		
Channels		1
Type	4 pole 3.5mm audio cable with 25 cm wire lead	
<b>EMS Protection</b>		
EFT (IEC 61000-4-4)	+/- 500 V	
ESD (IEC 61000-4-2)	+/- 4 kV Contact	
<b>LED Indicators</b>		
Status	1 x Power 1 x STA	
<b>Temperature Measurement</b>		
Channels	-	1
Range	-	0 °C ~ +80 °C
Accuracy	-	±2 °C
<b>RF</b>		
Channels	0 ~ 15 configured by DIP switch	
Group ID	0 ~ 3 configured by DIP switch	
Radio Frequency	433.1000 ~ 434.6000 MHz	
Transmission Power	9±1dBm (PA Off) / 18±1dBm (PA On)	
Transmission Distance (LoS)	100 m	
Node ID	1 ~ 31 configured by DIP switch	


Model	iWSN-100X-CLE	iWSN-101C-CLE
Working Duty (configured by DIP switch)	1 sec, 10 sec, 30 sec and 60 sec 3 min, 5 min, 10 min and 30 min	
<b>Antenna</b>		
Type	0 dBi Omni directional PCB antenna	
<b>Power</b>		
Input Type (Jumper-selectable)	Split-Core CTΦ16mm (100A); Φ24mm (200A); Φ36mm (400A); For charging only DC Power Supply 1~3 VDC, 1A	
Battery	Li-ion battery (compliant with UL1642) charged by CT induced current	
<b>Mechanical</b>		
Dimensions (mm)	85 x 152 x 25 (W x L x H)	94 x 152 x 21 (W x L x H)
Installation	Wall-mount or magnet adsorption	
<b>Environment</b>		
Operating Temperature	0 °C to +45 °C	
Storage Temperature	-20 °C to +50 °C	
Humidity	10 to 90% RH, Non-condensing	

## Appearance

**iWSN-100X-CLE**

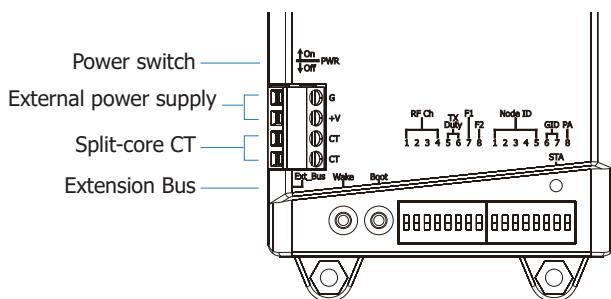


**iWSN-101X-CLE**

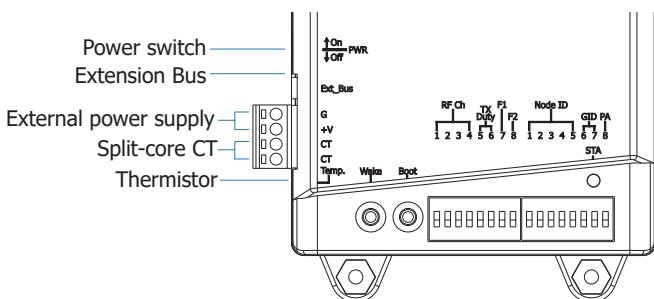

## Dimensions (Units: mm)


**iWSN-100X-CLE**

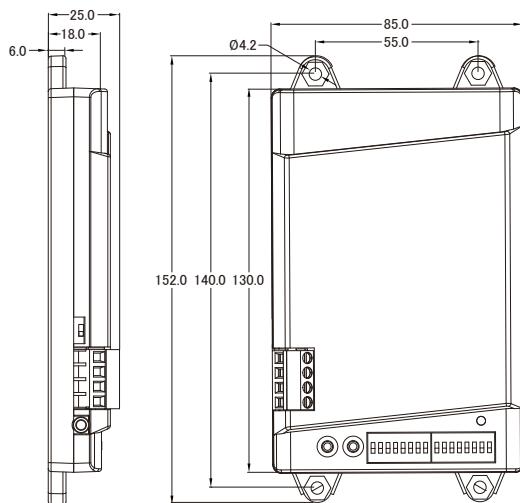

Left Side View

Front View

**iWSN-101X-CLE**

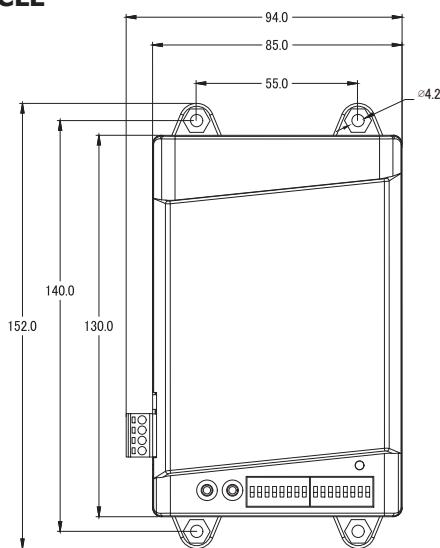

Front View

## Ordering Information

<b>iWSN-100X-CLE CR</b>	iWSN Environmental Sensing Module with 1-ch CT Input and 1 Expansion Interface (RoHS) (Asia Only)
<b>iWSN-101X-CLE CR</b>	iWSN Environmental Sensing Module with 1-ch CT Input, 1-ch Thermistor Input and 1 Expansion Interface (RoHS) (Asia Only)

## Accessories

<b>iWSN-200U CR</b>	iWSN data concentrator with RS-232/RS-485 serial port (RoHS)
<b>iWSN-200E CR</b>	iWSN data concentrator with Ethernet port (RoHS)
<b>iXN-0TH CR</b>	iWSN temperature and humidity sensing module (RoHS)
<b>iXN-0VC CR</b>	iWSN CO2e/TVOC sensing module (RoHS)
<b>iXN-1CX CR</b>	iWSN CO sensing module (RoHS)
<b>iXN-2VB1 CR</b>	iWSN 1-axis vibration sensing module (RoHS)
<b>iXN-2VB3 CR</b>	iWSN 3-axis vibration sensing module (RoHS)
<b>CA-TM-P100-L020P CR</b>	NTC Thermistor, Epoxy Resin to Connector Cable, 2M (-40 °C ~ +80 °C) (RoHS)
<b>CA-TM-P100-L050P CR</b>	NTC Thermistor, Epoxy Resin to Connector Cable, 5M (-40 °C ~ +80 °C) (RoHS)
<b>CA-TM-M100-L050P CR</b>	NTC Thermistor, Stainless Steel to Connector Cable, 5M (-40 °C ~ +105 °C) (RoHS)
<b>CA-TM-M200-L050P CR</b>	NTC Thermistor, Magnet to Connector Cable, 5M (-40 °C ~ +105 °C) (RoHS)