


**ET-2217H**

Ethernet I/O Module with 8-ch High Speed AI


**PET-2217H**

## Features

- Web Server for Configuration
- Support TCP Streaming, Modbus TCP/UDP, MQTT, and SNMP V2c Protocols
- 2-port Ethernet Switch (LAN Bypass) for Daisy-chain Wiring
- Supports Dual-watchdog
- I/O Pair Connection (Push and Pull)
- Built-in I/O
  - 8-ch High Speed AI (Differential)



## Introduction

The ET-2217H is a module with 8 differential high speed analog inputs. The module provides a programmable input range for all Analog Input channels, including  $\pm 2.5$  V, 0 to 5V,  $\pm 5$  V, 0 to 10 V,  $\pm 10$  V, 0 to 20 mA, 4 to 20 mA, and  $\pm 20$  mA. Each analog input channel can be configured with an individual input range, providing high overvoltage protection up to 50 VDC and overcurrent protection up to 50 mA at 50 VDC/VAC. Voltage and current input can be selected via a DIP switch.

The ET-2217H has a sampling rate of 8 KHz (total) and uses TCP Streaming continuous transmission mode. It can be used to record the voltage and current information. The module also provides 4 kV ESD/EFT protection, 2 kV Surge protection, and 3000 VDC intra-module isolation.

## System Specifications

Model	ET-2217H	PET-2217H
<b>Software</b>		
Built-in Web Server		Yes
<b>CPU Module</b>		
CPU	32-bit ARM	
Watchdog Timer		Module, Communication (Programmable)
<b>Isolation</b>		
2-way Isolation	Ethernet: 1500 VDC, I/O: 3000 VDC	I/O: 3000 VDC
<b>EMS Protection</b>		
EFT (IEC 61000-4-4)		$\pm 4$ kV for Power Line
ESD (IEC 61000-4-2)		$\pm 4$ kV Contact for Each Terminal, $\pm 8$ kV Air for Random Point
Surge (IEC 61000-4-5)		$\pm 2$ kV for Power Line
<b>LED Indicators</b>		
Status	Run, Ethernet	Run, Ethernet, PoE
<b>Ethernet</b>		
Ports	2 x RJ-45, 10/100 Base-Tx, Switch Ports	
PoE	-	Yes
LAN bypass		Yes
Access Control		Password and IP Filter
Protocol		Modbus TCP, Modbus UDP, MQTT, SNMP V2c, TCP Streaming (Access data by SDK library)
<b>Power</b>		
Reverse Polarity Protection		Yes
Consumption	2.5 W (max.)	2.7 W (max.)
Powered from PoE	-	IEEE 802.3af, Class1
Powered from Terminal Block		+10 to +48 VDC
<b>Mechanical</b>		
Casing		Metal
Dimensions (mm)		33 x 127 x 117 (W x L x H)
Installation		DIN-Rail mounting / Wall mounting (Optional ASO-0015)
<b>Environment</b>		
Operating Temperature		-25 ~ +75 °C
Storage Temperature		-40 ~ +80 °C
Humidity		10 ~ 90% RH, Non-condensing

## I/O Specifications


Model	ET-2217H	PET-2217H
<b>Analog Input</b>		
Channels	8 Differential	
Type	Voltage, Current (DIP switch selectable)	
Range	Voltage ±2.5 V, 0 ~ +5 V, ±5 V, 0 ~ +10 V, ±10 V	Current 0 ~ +20 mA, ±20 mA, +4 ~ +20 mA
Resolution	16-bit	
Accuracy	±0.1% of FSR	
Sampling Rate	8K Hz (total channels, TCP Streaming)	
Input Impedance	Voltage 20 MΩ	Current 136 Ω
Common Voltage Protection	±200 VDC	
Overshoot Protection	+50 VDC	
Overcurrent Protection	50 mA at 50 VDC (max.)	
Individual Channel Configuration	Yes	

## Data Transmission Mode

### Continuous Transmission (Maximum sampling rate of 8 kHz per channel)

After starting A/D acquisition, data is continuously transmitted to the Host PC And you can specify the required channels for collection.

Total simultaneous sampling channels	Maximum sampling rate per channel
8	1 KHz
4	2 KHz
2	4 KHz
1	8 KHz


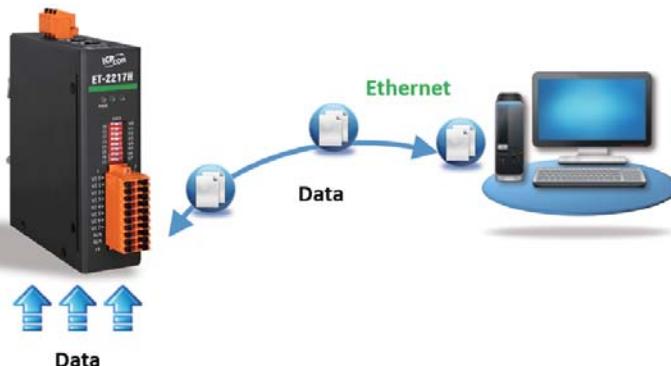


The **continuous collection mode** uses TCP streaming to transmit the collected data back to the PC. The streaming method of this module is that the firmware of the module uses polling scanning to sample data, and the data sampling rate is fixed.

The firmware polling scanning places the data in the module buffer. When the data reaches a certain amount, it is automatically sent to the host. The host sends a start collection command, and the module uses large data packets according to the above method, sending each packet to the host until the host sends a stop collection command to stop collecting data.

### Modbus/TCP (Command Response Mode)

This mode of the Modbus/TCP protocol is a commonly used communication method for acquisition modules. The firmware of the acquisition module will collect data at a fixed sampling rate and temporarily store it in the module memory (Modbus Register table). When the host sends a command to the module, the module will send the temporarily stored relevant data back to the host as needed.

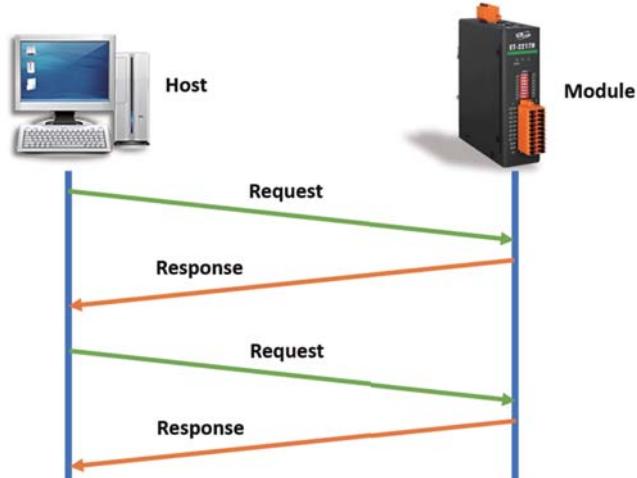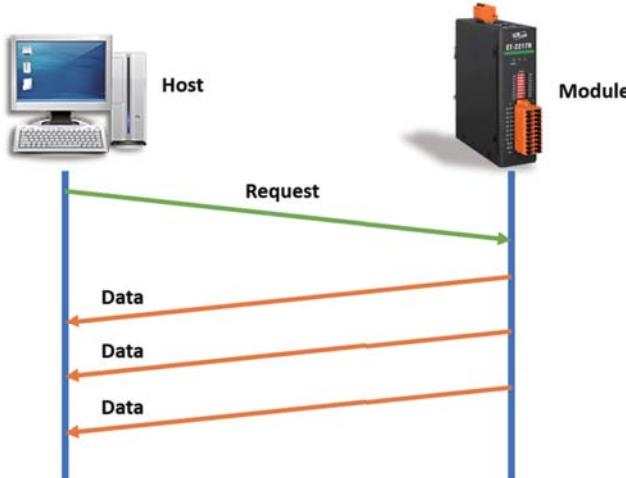



## ■ Software Specifications

PC Software	
Support OS	Windows 7/8/10/11 and Linux
Utility	Configuration, graphically display and data logging

SDK	<u>Windows</u>
	<ul style="list-style-type: none"> <li>◦ Microsoft VC, C#, VB.NET SDK API and Demo</li> <li>◦ Python Demo</li> <li>◦ NI LabVIEW Toolkit and Demo</li> </ul> <u>Linux</u> <ul style="list-style-type: none"> <li>◦ C/C++ library and Demo</li> <li>◦ .NET library and Demo</li> <li>◦ Python Demo</li> </ul>


## ■ Wire Connections

Voltage Input	Current Input
	


## ■ Pin Assignments

Port	Pin Assignment	Pin Assignment	SW2	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
SW1	 0: Run 1-E: Run IP F: Init	I0		V0	VI 0+	01	VI 0-
	F.G.	I1		V1	VI 1+	03	VI 1-
PWR	GND	I2		V2	VI 2+	05	VI 2-
	+ Vs	I3		V3	VI 3+	07	VI 3-
ETH1		I4		V4	VI 4++	09	VI 4-
ETH2		I5		V5	VI 5++	11	VI 5-
		I6		V6	VI 6++	13	VI 6-
		I7		V7	VI 7++	15	VI 7-
					N/A	17	N/A
					N/A	19	N/A
20-pin Connector							

## ■ Appearance

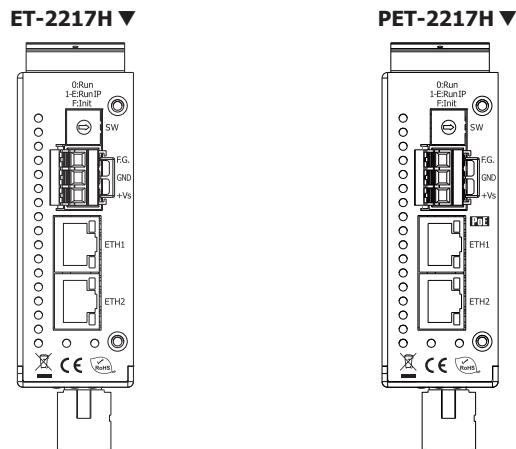

## Dimensions (Units: mm)

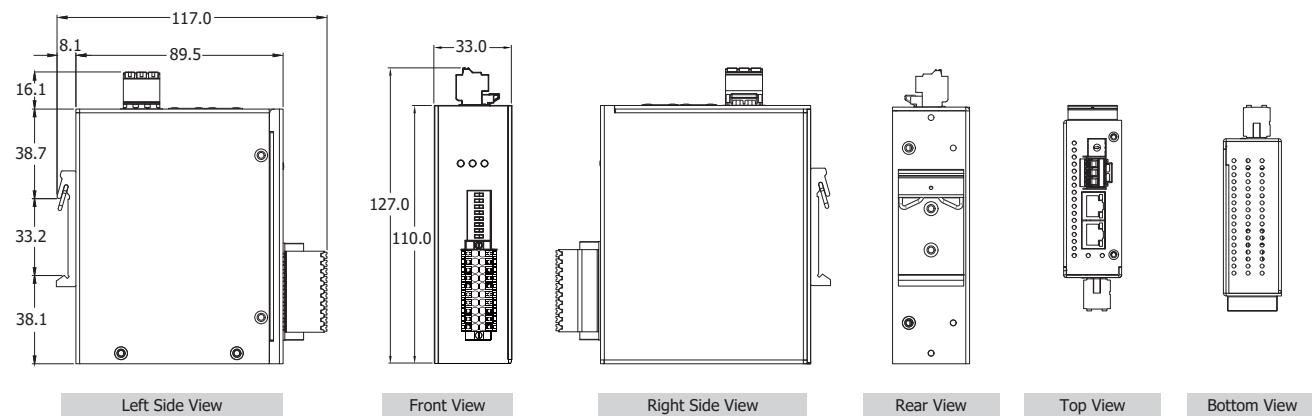

## ET-2217 Series Comparison Table

Model	(P)ET-2217	(P)ET-2217H	(P)ET-2217CI
Ethernet	2-port	2-port	2-port
PoE	Yes, PET-2217	Yes, PET-2217H	Yes, PET-2217CI
Channels	8 DIFF or 16 SE	8 DIFF	8 DIFF
Channel to Channel Isolation	No	No	Yes, 3000 VDC
Overvoltage Protection	120 VDC	50 VDC	120 VDC
Overcurrent Protection	50 mA at 110 VDC	50 mA at 50 VDC	50 mA at 110 VDC
Max. Sampling Rate	200 Hz (total channels)	8K Hz (total channels)	200 Hz (per channel)
Data Logger	No	No	320,000 records/ channel
Voltage/Current Inputs	DIP Switch	DIP Switch	Software
Terminals Block (Screw Locking)	Yes	Yes	Yes
Casing	Metal	Metal	Metal
Dimensions (mm)	33 x 127 x 117 (W x L x H)	33 x 127 x 117 (W x L x H)	33 x 176 x 129 (W x L x H)
Operating Temperature	-25 ~ 75°C	-25 ~ 75°C	-25 ~ 75°C

## Ordering Information

<b>ET-2217H CR</b>	Ethernet I/O Module with 2-port Ethernet Switch, 8-ch High Speed AI (RoHS)
<b>PET-2217H CR</b>	PoE I/O Module with 2-port Ethernet Switch, 8-ch High Speed AI (RoHS)

## Accessories

<b>ASO-0015 CR</b>	Wall Mount Kit (W: 28 mm) (RoHS)
--------------------	----------------------------------



**(P)ET-2000 + ASO-0015**