

## X103

7-channel isolated D/I

### Features

- Used with I-7188XC
- 7-channel Isolated Digital Input



### Introduction

The X-board series are for I-7188XA, I-7188XB, I-7188XC, I-7188XG, I-7188EG, I-7188EX and uPAC-7186EX Series (uPAC-7186EX, uPAC-7186PEX, uPAC-7186EG, uPAC-7186EX-FD, uPAC-7186EX-SM).


Above one  $\mu$ PAC can plug only one X-board.

X103 is a 7-channel Isolated Digital Input X-board for I-7188XC.

### Specifications

Digital Input	
Channels	7
Digital Logic Level	High: 3.5 V ~ 30 V Low: 0 V ~ 1 V
Isolation	Yes
Power	
Consumption	0.3 W
Mechanical	
Dimensions (mm)	38 mm x 64 mm
Environmental	
Operating Temperature	-25 ~ +75 °C
Storage Temperature	-40 ~ +80 °C
Humidity	5 ~ 90 %, Non-condensing

### Pin Assignments

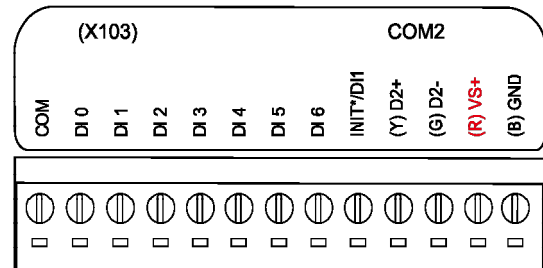

### Ordering Information

<b>X103</b>	7-channel isolated D/I
-------------	------------------------