

X110
14-channel D/I

Features

- 14-channel Non-Isolation Digital Input



Introduction

The X-board series are for I-7188XA, I-7188XB, I-7188XC, I-7188XG, I-7188EG, I-7188EX and uPAC-7186EX Series (uPAC-7186EX, uPAC-7186PEX, uPAC-7186EG, uPAC-7186EX-FD, uPAC-7186EX-SM).


Above one μ PAC can plug only one X-board.

X110 is a 14-channel Non-Isolation Digital Input X-board for I-7188XB, I-7188XG, I-7188EX, I-7188EG and uPAC-7186EX Series.

Specifications

Digital Input	
Channels	14
Digital Logic Level	High: 3.5 V ~ 30 V Low: 0 V ~ 1 V
Isolation	None
Mechanical	
Dimensions (mm)	38 mm x 64 mm
Environmental	
Operating Temperature	-25 ~ +75 °C
Storage Temperature	-40 ~ +80 °C
Humidity	5 ~ 90 %, Non-condensing

Pin Assignments

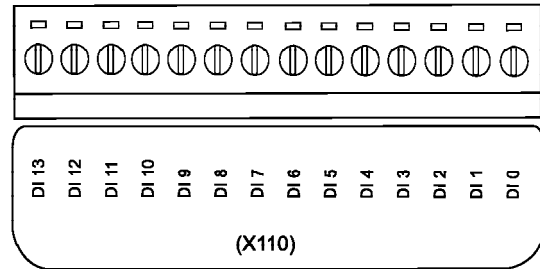

Ordering Information

X110 CR	14-channel D/I (RoHS)
----------------	-----------------------