

X111
13-channel D/O

Features

- 13-channel Non-Isolation Digital Output



Introduction

The X-board series are for I-7188XA, I-7188XB, I-7188XC, I-7188XG, I-7188EG, I-7188EX and uPAC-7186EX Series (uPAC-7186EX, uPAC-7186PEX, uPAC-7186EG, uPAC-7186EX-FD, uPAC-7186EX-SM).


Above one μ PAC can plug only one X-board.

X111 is a 13-channel Non-Isolation Digital Output X-board for I-7188XB, I-7188XG, I-7188EX, I-7188EG and uPAC-7186EX Series.

Specifications

Digital Output	
Channels	13
Type	Open Collector, TTL
Load Voltage	$\leq +30$ VDC
Max. Load Current	100 mA
Isolation	None
Mechanical	
Dimensions (mm)	38 mm x 64 mm
Environmental	
Operating Temperature	-25 ~ +75 °C
Storage Temperature	-40 ~ +80 °C
Humidity	5 ~ 90 %, Non-condensing

Pin Assignments

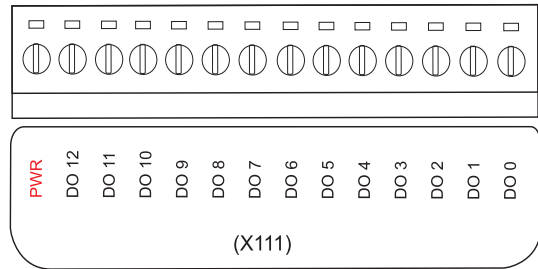

Ordering Information

X111 CR	13-channel D/O (RoHS)
----------------	-----------------------