



X200

1-channel A/D (0 ~ 2.5 V)

Features

- 1-channel Non-Isolation Analog Input
- 12-bit input (0 ~ 2.5 VDC)



Introduction

The X-board series are for I-7188XA, I-7188XB, I-7188XC, I-7188XG, I-7188EG, I-7188EX and uPAC-7186EX Series (uPAC-7186EX, uPAC-7186PEX, uPAC-7186EG, uPAC-7186EX-FD, uPAC-7186EX-SM).


Above one μ PAC can plug only one X-board.

X200 is a 1-channel Non-Isolation Analog Input X-board for I-7188XC.

Specifications

Analog Input	
Channels	1
Type	Voltage
Range	0 ~ 2.5 VDC
Resolution	12-bit
Sampling Rate	900 Hz Max.
Input Impedance	100 k Ω
Overvoltage Protection	± 5 VDC
Isolation	none
Mechanical	
Dimensions (mm)	38 mm x 64 mm
Environmental	
Operating Temperature	-25 ~ +75 $^{\circ}$ C
Storage Temperature	-40 ~ +80 $^{\circ}$ C
Humidity	5 ~ 90 %, Non-condensing

Pin Assignments

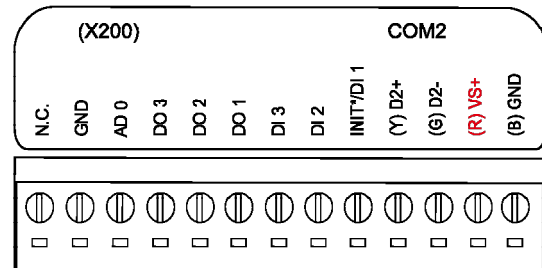

Ordering Information

X200	1-channel A/D (0 ~ 2.5 V)
-------------	---------------------------