

## X202

7-channel A/D (0 ~ 20 mA)

### Features

- 7-channel Non-Isolation Analog Input
- 12-bit input (0 ~ 20 mA)



### Introduction

The X-board series are for I-7188XA, I-7188XB, I-7188XC, I-7188XG, I-7188EG, I-7188EX and uPAC-7186EX Series (uPAC-7186EX, uPAC-7186PEX, uPAC-7186EG, uPAC-7186EX-FD, uPAC-7186EX-SM).


Above one  $\mu$ PAC can plug only one X-board.

X202 is a 7-channel Non-Isolation Analog Input X-board for I-7188XB, I-7188XG, I-7188EX, I-7188EG and uPAC-7186EX Series.

### Specifications

Analog Input	
Channels	7
Type	Current
Range	0 ~ 20 mA
Resolution	12-bit
Sampling Rate	1 KHz Max.
Input Impedance	125 Ohm
Common Voltage Protection	$\pm 15$ VDC
Isolation	None
Mechanical	
Dimensions (mm)	38 mm x 64 mm
Environmental	
Operating Temperature	-25 ~ +75 °C
Storage Temperature	-40 ~ +80 °C
Humidity	5 ~ 90 %, Non-condensing

### Pin Assignments

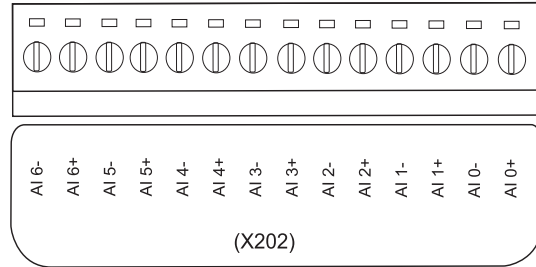

### Ordering Information

<b>X202</b>	7-channel A/D (0 ~ 20 mA)
-------------	---------------------------