

X500

1 埠 RS-232 (9-Pin)

■ 特色

- 1 埠非隔離 9 線式 RS-232



■ 介紹

X-board 系列適用於 I-7188XA、I-7188XB、I-7188XC、I-7188XG、I-7188EG、I-7188EX 和 uPAC-7186EX 系列 (uPAC-7186EX、uPAC-7186PEX、uPAC-7186EG、uPAC-7186EX-FD、uPAC-7186EX-SM)。


一個 μ PAC 上只能插一個 X-board。

X500 是用於 I-7188XC 的 1 埠非隔離 9 線式 RS-232 X-board。(不含外殼)

■ 規格

COM Ports	
Ports	1 x 9-wire RS-232 (TxD, RxD, RTS, CTS, DSR, DTR, DCD, RI, GND without case, for I-7188XA/I-7188XC) 1 x 3-wire RS-232 (TxD, RxD, GND with case, for I-7188XC)
Baud Rate	115200 bps Max. 1200 ~ 115200 bps 10 k, 20 k, 50 k, 125 k, 250 kbps, 500 k, 800 k, 1M 125 k, 250 k, 500 k
FIFO 容量	16 bytes
電源	
功耗	0.4 W
機構	
尺寸 (mm)	38 mm x 64 mm
環境	
工作溫度	-25 ~ +75 °C
儲存溫度	-40 ~ +80 °C
濕度	5 ~ 90 %, Non-condensing

■ 接腳定義

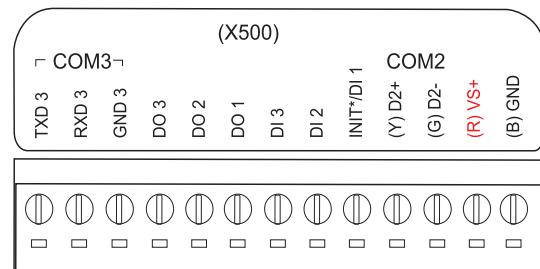

■ 訂購資訊

X500 CR	1 埠 RS-232 (9-Pin) (RoHS)
----------------	---------------------------