

XW507


1-port Non-Isolated RS-422/485 with 5-ch Isolated Digital Input and 5-ch Isolated Digital Output

Introduction

XW507 is a RS-422/485 port & DI/O expansion board for use with uPAC-50xx and WP-51xx series controllers. XW507 provides 1 Port Non-isolated RS-485 serial ports and 5-ch Isolated DI(Wet) and 5-ch Isolated DO(Sink) that have 128-byte FIFO buffers and support communication speeds up to 115,200 bps.

The serial communication modules are designed for use with intelligent devices like bar code readers, intelligent sensors, instrumentation equipment, computers, and almost any device with an RS-422 or RS-485 port.

Pin Assignments

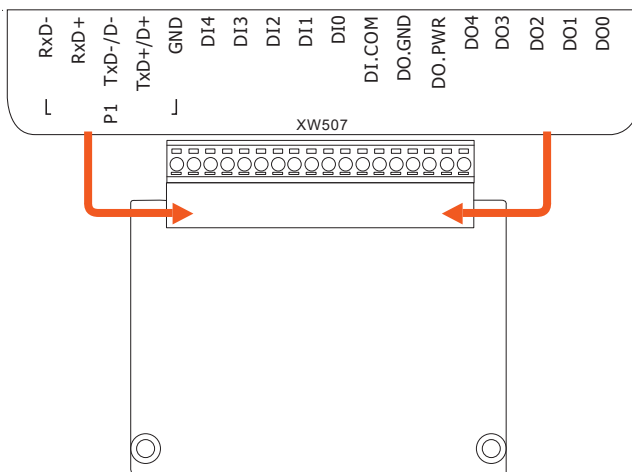

Ordering Information

| | |
|-----------------|---|
| XW507 CR | 1-port Non-Isolated RS-422/485, 5-ch Isolated DI (Wet) and 5-ch Isolated DO (Sink, NPN, 10 ~ 40 VDC) Expansion Board (RoHS) |
|-----------------|---|

Features

- Baud 115200 bps RS-422/485 supports
- I/O Expansion
 - DI(Wet): 5 Channels
 - DO(Sink): 5 Channels



Specifications

| Digital Input | |
|--------------------------------|-----------------------------------|
| Channels | 5 |
| Type | Wet |
| Sink/Source (NPN/PNP) | Sink/Source |
| Wet Contact, ON Voltage Level | +10 VDC ~ +50 VDC |
| Wet Contact, OFF Voltage Level | +4 VDC Max. |
| Isolation | 3750 Vrms |
| Input Impedance | 10 K Ohm |
| Overvoltage Protection | 60 VDC |
| Digital Output | |
| Channels | 5 |
| Type | Open Collector |
| Sink/Source (NPN/PNP) | Sink |
| Load Voltage | +10 VDC ~ 40 VDC |
| Max. Load Current | 200 mA/channel at 25 °C |
| Overload Protection | 1.4 A |
| Isolation | 3750 Vrms |
| COM Ports | |
| Ports | 1x RS-485/RS-422 |
| Baud Rate | 115200 bps Max. |
| Parity | None, Even, Odd, Mark, Space |
| Data Bit | 5, 6, 7, 8 |
| Stop Bit | 1, 1.5, 2 |
| FIFO Size | 128 bytes |
| Power | |
| Consumption | 0.4 W |
| Mechanical | |
| Dimensions (mm) | 66 mm x 82 mm x 17 mm (W x L x H) |
| Environmental | |
| Operating Temperature | -25 ~ +75 °C |
| Storage Temperature | -30 °C ~ +75 °C |
| Humidity | 10 ~ 95% RH, Non-condensing |