



I-87069W | I-87069PW

8-channel PhotoMOS Relay Output Module

Features

- 8 PhotoMos Relay Outputs
- No Arcing, No Bounce, and No Switching Noise
- Photocouple Isolation
- Power-on Value and Safe Value
- Embedded Dual Watchdog
- 2000/5000 VDC Intra-module Isolation
- 4 kV ESD Protection



Introduction

Both the I-87069W and the I-87069PW features eight Form A PhotoMOS relay output channels. In comparison to electromechanical relays, the PhotoMOS relays provide a faster response time, greater electrical endurance, higher vibration and shock resistance. There are also no arcing, no bounce, and no switching noise for the PhotoMOS relay. There are options for configuring power-on and safe digital output values, and both the I-87069W and the I-87069PW each include eight LED indicators that are used to display channel status as well as providing 4 kV ESD protection.

System Specifications

Model	I-87069W	I-87069PW
COM Port		
Ports	RS-485	
Data Format	N, 8, 1	
Baud Rate	1200 ~ 115200 bps	
Protocol	DCON	
CPU Module		
Dual Watchdog Timer	Module (1.6 Seconds), Communication (Programmable)	
LED Indicators		
System LED Indicator	1	
I/O LED Indicator	8	
Isolation		
Intra-module Isolation, Field-to-Logic	5000 VDC	2000 VDC
EMS Protection		
ESD (IEC 61000-4-2)	±4 kV Contact for Each port, ±8 kV Air for Random Poin	
ESD (IEC 61000-4-4)	±4 kV for Power	
Power		
Consumption	0.3 W Max.	
Mechanical		
Dimensions (W x L x H)	30 mm x 115 mm x 102 mm	
Environment		
Operating Temperature	-25 ~ +75 °C	
Storage Temperature	-40 ~ +85 °C	
Humidity	10 ~ 95 % RH, Non-condensing	


I/O Specifications

Model	I-87069W	I-87069PW
PhotoMOS Relay Output		
Channels	8	
Type	PhotoMOS Relay, Form A	
Operating Load Voltage Range	350 V (AC peak or DC)	80 V (AC peak or DC)
Continous Load Current	0.13 A	1 A
Peak Load Current	0.4 A	3 A
Output Off State Leakage Current	1 uA	
Operating Time	2 ms (Max.)	5 ms (Max.)
Release Time	1 ms (Max.)	0.5 ms (Max.)
Electrical Endurance	No Arcing, No Bounce, and No Switching Noise	
Power-on Value	Yes	
Safe Value	Yes	


Applications

- All Types of On/Off Control
- Industrial Automation
- Industrial Machinery
- Building Automation
- Food and Beverage Systems
- Semiconductor Fabrication
- Control Systems


Internal I/O Structure

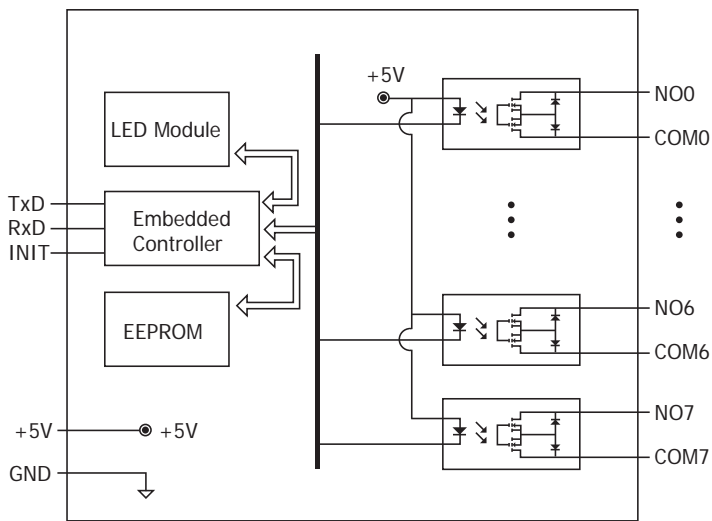


Pin Assignments

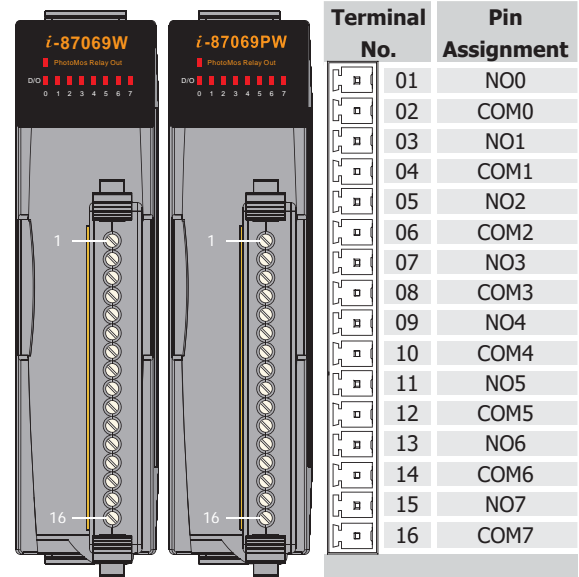

Wire Connections

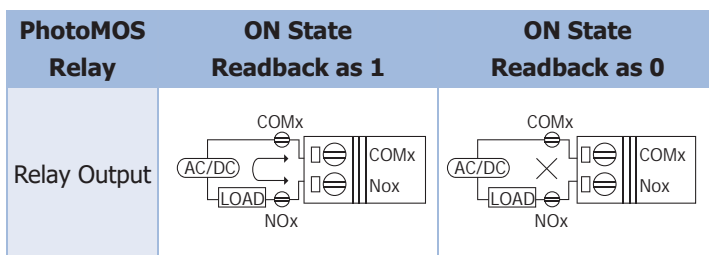

Dimensions (Unit: mm)

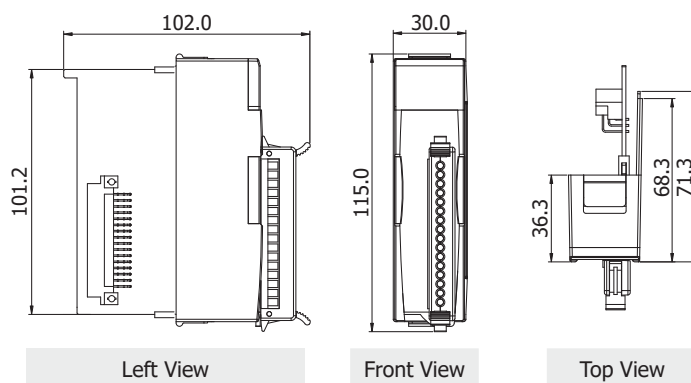

Ordering Information

I-87069W-G CR	8-channel PhotoMOS Relay Output Module (RoHS)
I-87069PW-G CR	8-channel PhotoMOS Relay Output Module (RoHS)