



e-A16SH

200 KS/s High-speed, 16-bit,
16-channel Simultaneously Sampled Analog Input

Features

- 16 channels Synchronous Sample & Hold Analog Input
- 16 Single-ended Analog Inputs
- 2 channels timer/counter
- 16-bit AD Converter, 200kHz Sampling Rate for each channel
- Built-in 2048 samples FIFO for Analog Inputs
- Software Calibration
- Wide Operating Temperature Range: -25 to +75 °C




Introduction

The e-A16SH is an e-Bus x 1 (similar to PCI-E x1) module that provides 16-ch Analog Input. With a FIFO of 2048 samples, the maximum sampling rate is up to 200 kS/s with 16 16-bit A/D converters simultaneously sampling on each channel. The module has two channels timer/counter. This module needs to be installed on an e-Bus x1 slot of the AXP-9000-IoT Programmable Automation Controller (PAC).

e-A16SH supports more kinds of trigger modes for A/D conversion: software trigger, internal pacer trigger and external pacer trigger. The software trigger can acquire a sample whenever needed, while the internal pacer saves CPU loading by triggering the sampling at pre-programmed frequency. An external pacer can be used for triggering by external frequency source.

The module installed on AXP-9000 with 64-bit Windows 10 IoT OS supports DLL SDK and Active X control together with various language sample programs based on Visual C++, Visual Basic, C#.NET, Visual Basic.NET and LabVIEW are provided in order to help users quickly and easily develop their own applications.

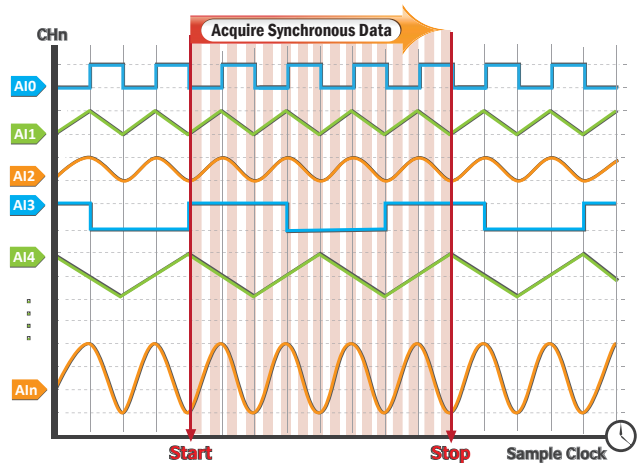


System Specifications

Bus Interface	
Type	e-Busx1
Hardware	
Connector	32-pin Terminal Block
Software	
SDK	LabVIEW Demo, VB/VC/Delphi/BCB/ VB.NET/C#.NET/VC.NET/MATLAB Demo
LED Display	
System LED Indicator	1 LED as Power Indicator
Power	
Consumption	600 mA @ +3.3 V
Mechanical	
Dimensions (W x L x H)	31 mm x 134 mm x 145 mm
Environment	
Operating Temperature	-25 ~ +60 °C
Storage Temperature	-40 ~ +85 °C
Humidity	10 ~ 90% RH, Non-condensing


I/O Specifications

Analog Input		
Channels	16 Single-ended (Simultaneously)	
Range	Gain	1, 2
	Bipolar Input	±10 V, ±5 V
Resolution	16-bit	
Accuracy	0.05 % of FSR ± 1 LSB @ 25 °C, ±10 V,	
Sampling Rate	200 kS/s	
Input Impedance	10, 000 MΩ/4 pF	
Overvoltage Protection	Continuous ± 35 Vp-p	
FIFO Size	2 k Samples (Total)	
Trigger Mode	Software, Pacer, External	
Isolation	2500 VDC (Bus-type)	
Data Transfer	Polling, Interrupt, DMA	
Timer/Counter		
Channels	2	


Pin Assignments

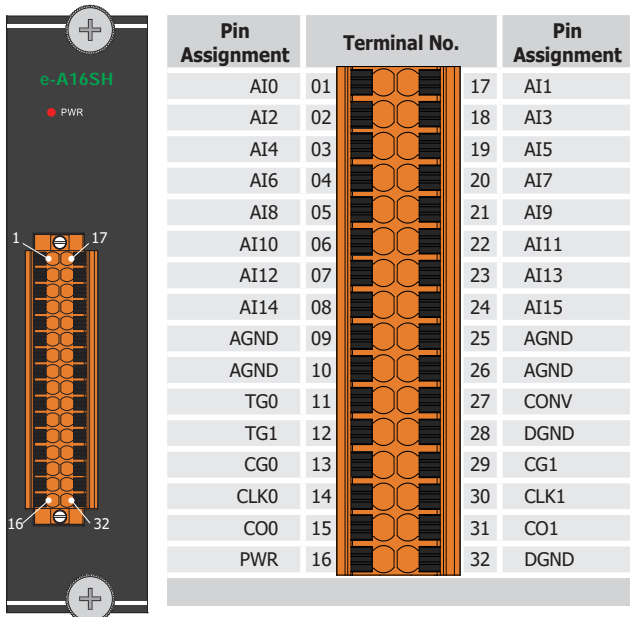


Dimensions (Units: mm)

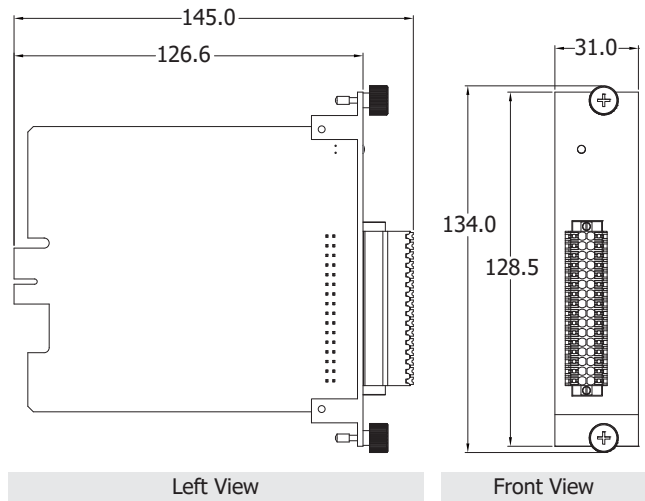

Wire Connections

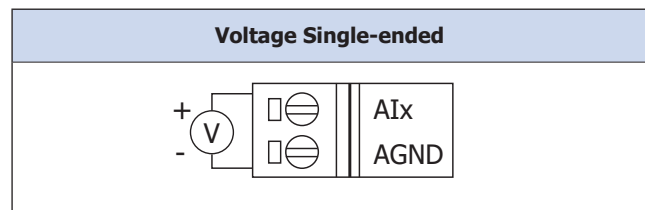

Internal I/O Structure

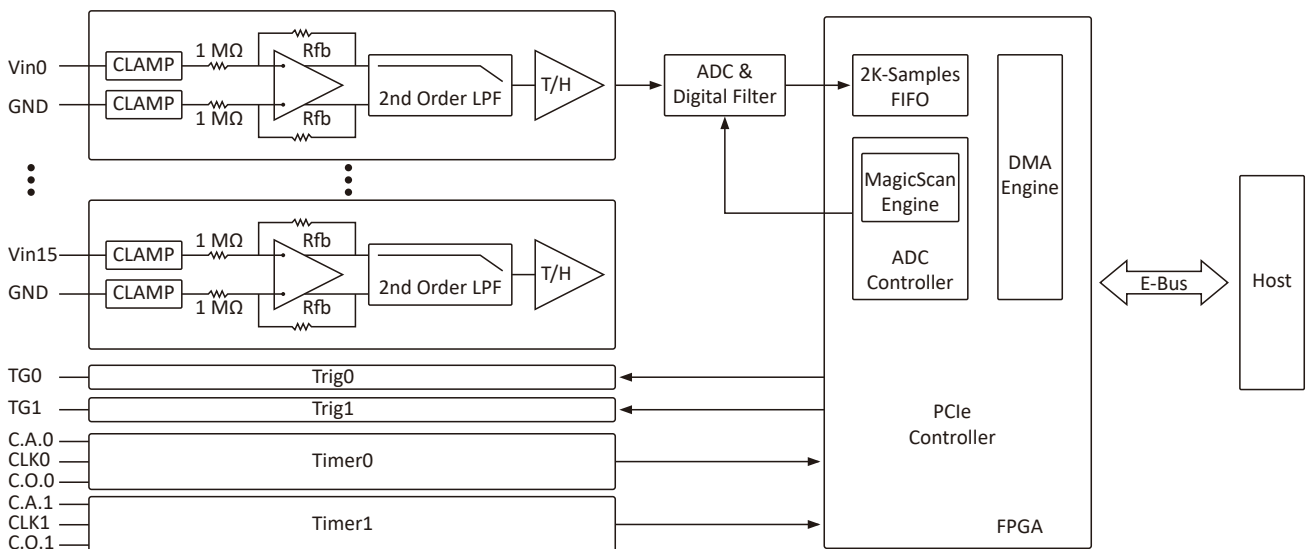

Ordering Information

e-A16SH CR	200 KS/s High-speed, 16-bit, 16-channel Simultaneously Sampled Analog Input (RoHS)
-------------------	--