



ET-M8194H

Ethernet Remote Unit
with High-speed 4-axis Motion Control Module

Features


- Remote control via Modbus TCP
- Can be controlled using SCADA, PAC, or PLC
- Can be integrated into multi-station, multi-axis applications
- 4-axis motion control capability
- 2/3-axis linear interpolation function
- 2-axis circular interpolation function
- Programmable automatic homing function
- EzMove Utility for configuration and macro programming
- Test motion functions via EzMove without compilation
- Library for rapid development of applications
- Easy wiring for multi-station applications
- Can be set as a remote or stand-alone motion controller
- Supports high-speed FRnet I/O: 128 DO and 128 DI



Introduction

The **ET-M8194H** is a new product from ICP DAS that can be used to implement remote control functionality via the Ethernet and includes an I-8094H module (a 4-axis stepping/pulse-type servo motor control module with an embedded CPU) and an Ethernet communication interface. The intelligent ET-M8194H can provide users with the ability to develop a wide range of remote motion control applications, and can be integrated in any system where the host platform is built on the Modbus TCP protocol (for example: PC, PAC or PLC). In addition, implementing a multi-station, multi-axis motion control solution can easily be achieved by cascading several ET-M8194H devices using Ethernet cables, either with or without Ethernet switches. ICP DAS also provides the EzMove Utility and an API Library that can be used to configure the ET-M8194H and to rapidly develop customized control applications.

Hardware

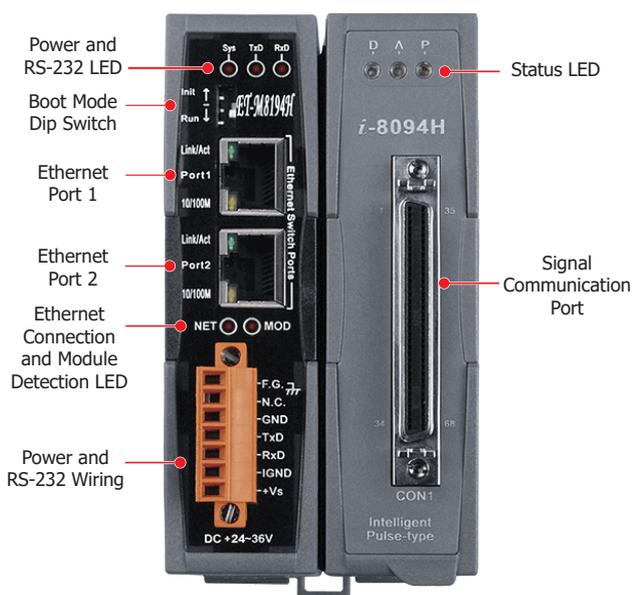

ET-M8194H Interface Functions

Software Supported: ET-M8194H SDK

EzMove Utility

EzMove is a configuration utility developed by ICP DAS for the ET-M8194H controller. It is intended to perform motion control tasks and movement test on equipment without the need to first create customized applications. As the EzMove Utility is a Modbus client, it can be used to create and edit Macro Programs (MP), which can then be uploaded to the ET-M8194H. The EzMove Utility can also display and plot position/velocity of all four axes as well as display Modbus TCP messages for easy reference.



API Library

The ET-M8194H API Library is composed of nine groups of functions, which can be utilized to edit Macro Programs (MP) and send Modbus TCP commands required to control or configure the I-8094H. The library provides users with the ability to simultaneously control a large number of ET-M8194H from the PC.

DLL and libraries for the following development environments are provided:

- Visual C++
- BCB 5.0, 6.0
- C#, VB.NET
- Visual Basic 6.0

Specifications

Model	ET-M8194H	Model	ET-M8194H
Software		Ring Counter Mode	
OS Support	Windows 7/8/10 32/64 bit		32-bit
Development	Visual C++ lib/DLL, C#, VB.Net DLL, Visual Basic 6.0, BCB 5.0, 6.0 Macro Programming	Counting Rate	
Utility	EzMove Utility		4 MHz
Hardware		Counter Width	
Connector	68-pin SCSI-II		32-bit
General		Pulse Output	
No. of Axes	4	Mode	CW/CCW, PULSE/DIR
Motion Control Type	IC Chip Based	Counter Width	32-bit
Synchronous Action	10 activation factors and 14 actions	Rate	4 MPPS (Max.)
Speed Profile	T/S-curve	Interpolation	
Position Control Mode	Incremental and absolute mode	Cicular	Any 2 axes (one group only)
Command Type	Pulse Command	Continuous	Yes
Auto-Home Search	Yes	Linear	Any 2 to 3 axes (one group only)
Input Signal Filter	2 ~ 16 ms, 8 stages	Digital Input	
Axis I/O		Channels	Local: 4 DI Expandable: 128 DI
Servo Interface Output	SVON	Isolation	2500 Vrms (with DN-8468)
Latch Input	Yes	Digital Output	
Manual Pulse Generator	Yes	Channels	Expandable: 128 DO
Mechanical Switch Input	Home, Limit+/-, Near Home, Emergency	Isolation	2500 Vrms (with DN-8468)
Position Compare Output	10 KHz (X and Y only)	Ethernet	
Servo Interface Input	INP, ALM	Protocol	Modbus TCP
Encoder Input		Power	
Mode	A/B Phase, Up/Down	Input Range	+24V
		Mechanical	
		Dimensions (mm)	65 x 121 x 99 (W x L x H)
		Environment	
		Operating Temperature	-20 ~ +75°C
		Storage Temperature	-30 ~ +85°C
		Humidity	10 ~ 90% RH, Non-condensing

Applications

- X-Y-Z Table
- Fix-Pitch Stamping Machine
- Transfer Machine
- Spinner
- Loader/Unloader

Ordering Information

ET-M8194H	Ethernet Remote Automation Unit with High-speed 4-axis Motion Control Module
------------------	--

Accessories

DN-8468UB	Photo-isolated Universal Snap-on Wiring Terminal Board
DN-8468GB	Photo-isolated General Purpose Wiring Terminal Board
DN-8468MB	Photo-isolated Snap-on Wiring Terminal Board for Mitsubishi MELSERVO-J2 Servo Amplifier
DN-8468PB	Photo-isolated Snap-on Wiring Terminal Board for Panasonic MINAS A4/A5 Servo Amplifier
DN-8468YB	Photo-isolated Snap-on Wiring Terminal Board for Yaskawa Sigma II/III/V Servo Amplifier
DN-8468DB	Photo-isolated Snap-on Wiring Terminal Board for Delta ASDA-A Servo Amplifier
DN-8468FB	Photo-isolated Snap-on Wiring Terminal Board for Fuji FALDIC-W Servo Amplifier
CA-SCSI15-H3	68-pin SCSI-II Connector Cable; Length 1.5 M
CA-SCSI30-H3	68-pin SCSI-II Connector Cable; Length 3.0 M
CA-SCSI50-H2	68-pin SCSI-II Connector Cable; Length 5.0 M