
DN-843I-CT-1

3-channel 1 A Current Transformer


DN-843I-CT-10

3-channel 10 A Current Transformer


DN-843I-CT-20

3-channel 20 A Current Transformer


DN-843I-CT-50

3-channel 50 A Current Transformer

■ Features


- AC/DC Source Input
- Linear Attenuation Ratio
- High Current Input Measurement
- Isolation Input
- Channel to Channel Isolation
- Easily Wire Connection




■ Introduction

The maximum input range is from ± 1 A to ± 50 A and can be attenuated to from ± 1.6 V to ± 10 V. The "I" version provide 3000 Vdc intra-modules isolation and 3000 Vdc channel to channel isolation to avoid the noise interference from inputs to outputs or channel to channel. It can be used with the analog input modules such as I-7017 and I-87017 etc. to measure the high current.

■ Applications

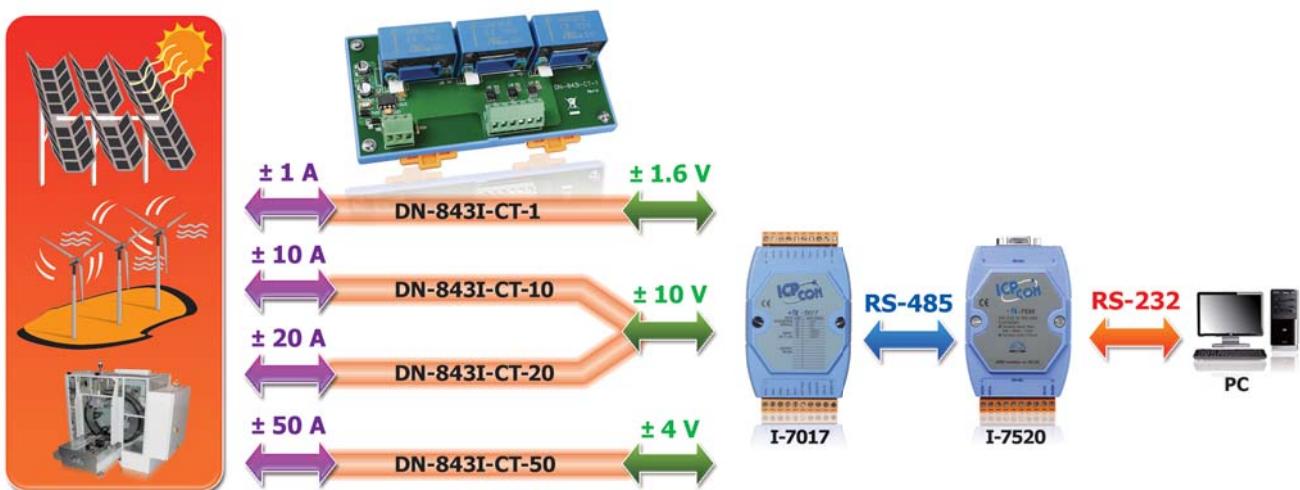


■ Installation

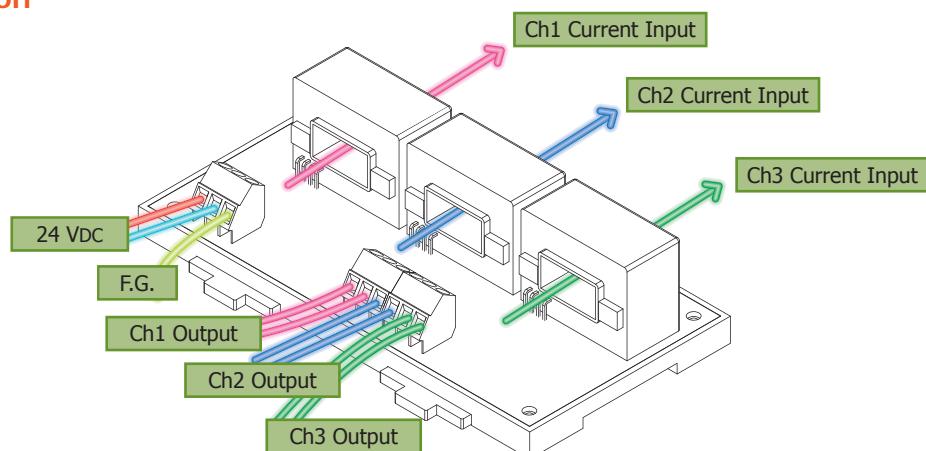

■ Specifications

Models	DN-843I-CT-1	DN-843I-CT-10	DN-843I-CT-20	DN-843I-CT-50		
EMS Protection						
ESD (IEC 61000-4-2)	± 4 kV contact for power line, input and output channels, ± 8 kV air for random point					
CT						
Type	Solid Core (closed)					
Inside Diameter	20.4 X 10.4 mm					
Analog Input						
Channels	3					
Type	AC/DC Current					
Range	± 1 A	± 10 A	± 20 A	± 50 A		
Accuracy	Zero ≤ 100 mV, 3% of FSR		1% of FSR			
Bandwidth	50 KHz					
Input Impedance	> 1 M Ω					
Chanel to Channel Isolation	Yes, 3000 Vrms					
Intra-module Isolation	3000 VDC					
Analog Output						
Channels	3					
Type	AC/DC Voltage					
Range	± 1.6 Vpp	± 10 Vpp	± 4 Vpp			
Power						
Input Range	+10 VDC ~ +24 VDC					
Consumption	1.2 W					
Mechanical						
Casing	Plastic					
Dimensions (mm)	148 x 83 x 39 (W x L x D)					
Installation	DIN-Rail Mounting					
Environment						
Operating Temperature	-25 ~ +75 °C					
Storage Temperature	-30 ~ +75 °C					
Humidity	10 ~ 90% RH, Non-condensing					

■ Dimensions (Units: mm)

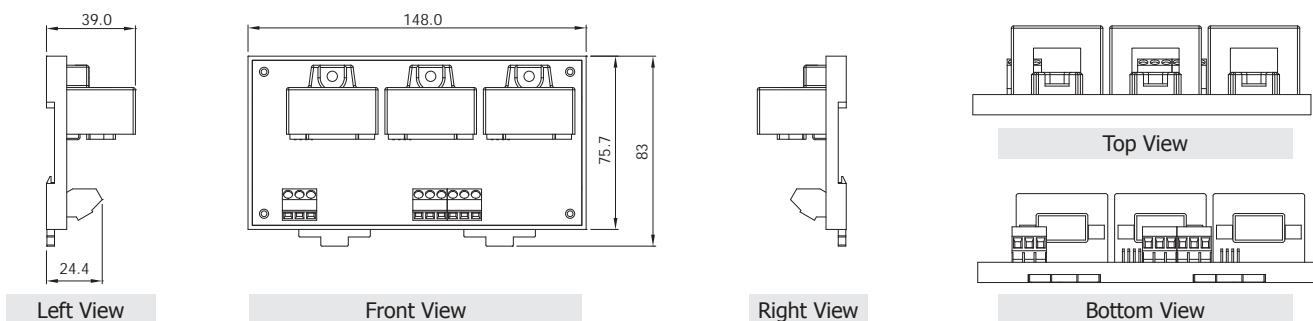

■ Selection Guide

DN-84



Number of Channels
3: 3 channels



I: Channel to channel Isolation



CT: Current Transformer



Input Current Range

■ Ordering Information

DN-843I-CT-1 CR	3-channel 1 A Current Transformer (RoHS)
DN-843I-CT-10 CR	3-channel 10 A Current Transformer (RoHS)
DN-843I-CT-20 CR	3-channel 20 A Current Transformer (RoHS)
DN-843I-CT-50 CR	3-channel 50 A Current Transformer (RoHS)

■ Accessories

	MDR-20-24 CR 24 V/1 A, 24 W Power Supply with DIN-Rail Mounting (RoHS)
	I-7017-G CR 8-channel Analog Input Module with DCON Protocol (Gray Cover) (RoHS)
	I-87017-G CR 8-channel Analog Input Module (RoHS)