

Management Switch

Real-time Redundancy with Cyber-Ring

- Guaranteed performance over the full wide range operating temperature ($-40^{\circ}\text{C} \sim +75^{\circ}\text{C}$)
- DIN-Rail mount for industrial usage
- 0% packet loss per port / 60 Sec
- Provide DIP/rotary switch for quick set-up
- With Cyber-Ring topology, enables real-time redundant, fault-tolerant, self- healing operations (Cyber-Ring)
- Redundant power inputs
- Support Modbus protocol
- Support both RS-485/Ethernet interfaces for the management




SCADA

Modbus - TCP

Modbus - RTU

Backup path

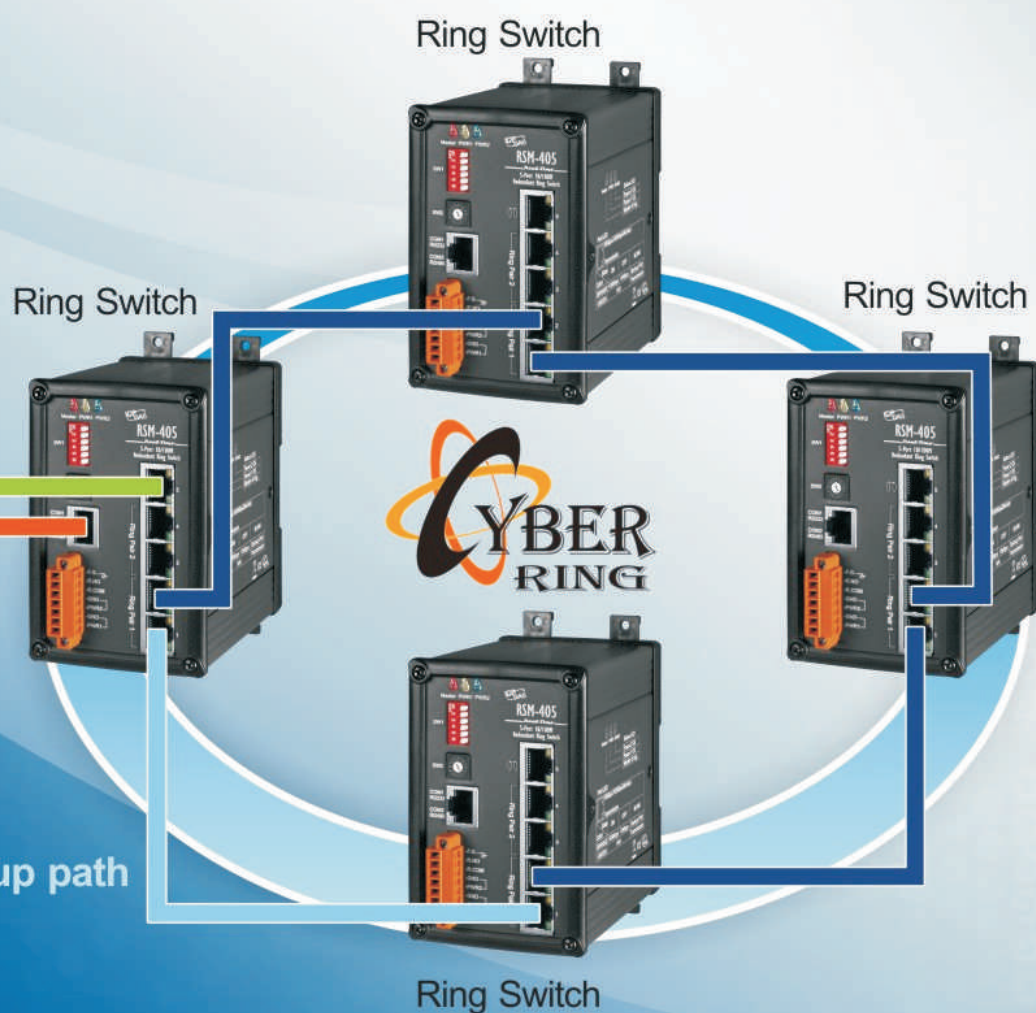

ICP DAS CO., LTD.

TEL : +886-3-597-3366

FAX : +886-3-597-3733

e-mail : sales@icpdas.com

<http://www.icpdas.com>