


高速多功能摄取卡

全新

PCI-2602U

- Universal PCI(3.3V/5V) Interface.
- 16 S.E./8 Diff. analog inputs, 8192 samples FIFO.
- 16-bit ADC with max. 1 MS/s sampling rate.
- 2-ch 16-bit voltage output.
- 32-ch programmable DI/DO.
- 8-bit analog/digital pattern generator.
- Analog/Digital external trigger.

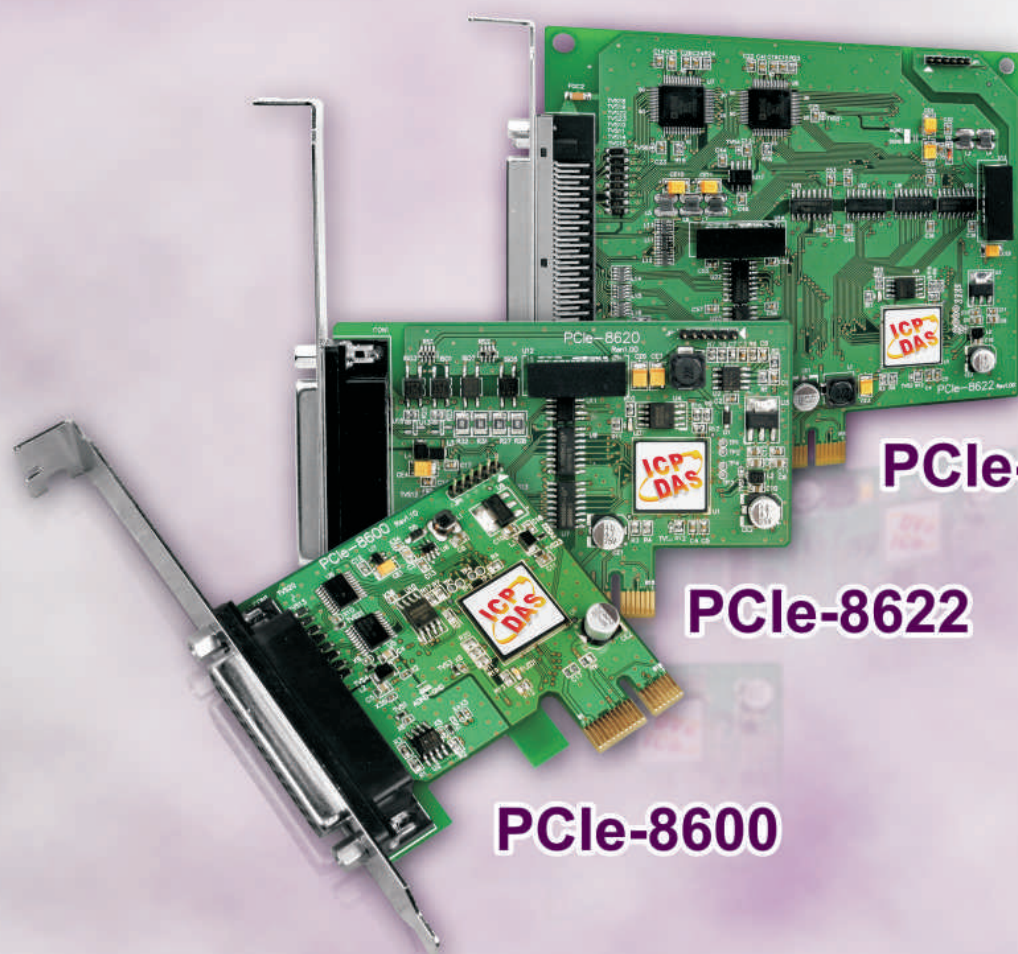

PCIe-8620

PCIe-8622

PCIe-8600

- PCI Express x1, Low profile.
- 16-bit 200KHz AD Sampling Rate for all channels.
- 8/16-ch Synchronous Sample & Hold.
- 8/16-ch S.E.
- 2048-samples hardware FIFO for analog input.
- 4/12-ch Isolated DO (PCIe-8620/ PCIe-8622 only).
- 4/12-ch Isolated DI (PCIe-8620/ PCIe-8622 only).
- 2-ch, 16-bit DA (PCIe-8622 only).

PCIe-813

- PCI Express x1.
- 32 S.E. Isolated analog inputs, 8192 samples FIFO.
- 16-bit ADC with max. 1 MS/s sampling rate.
- Analog external trigger.



泓格科技股份有限公司 ICP DAS CO., LTD.

TEL : +886-3-597-3366 FAX : +886-3-597-3733 e-mail : sales@icpdas.com

<http://www.icpdas.com>