

tSL-P4R1 / tSL-PA4R1

Stack Light Monitoring Solution



Easy to Integrate Stack Light Status to MES for Machine Utilization and Throughput


Features

- Detects on, off, or flashing status of each color segment
- 4-channel DC/AC digital inputs
- 1-channel alarm relay output
- User-defined combinatorial status of multiple color segments
- Reports time period of the previous status
- Supports Modbus RTU, Modbus TCP and MQTT protocols
- Includes RS-485/Ethernet/PoE communication interface
- Web-based configuration interface and firmware update via Ethernet



Ethernet

Control Room

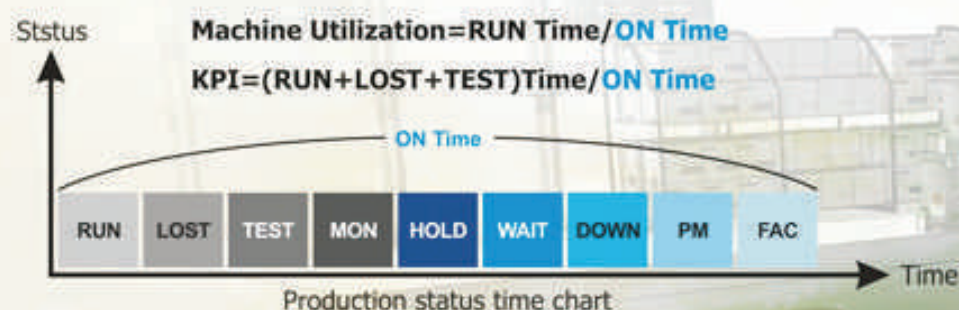

#1:RUN #2:STOP

iKAN series

Ethernet

WISE-5231

tSL-PA4R1

tSL-PA4R1

RS-485

RS-485



ICP DAS CO., LTD.

TEL:+886-3-597-3366 FAX:+866-3-597-3733 email:sales@icpdas.com

www.icpdas.com