



iCAM-760D Quick Start

v1.1, 05/2020

Packing List

iCAM-760D package includes the following items:



iCAM-760D




Bracket




Screw Pack




Accessory Pack



Alignment Sticker



Software CD




Quick Start

Technical Resources

How to search for drivers, manuals and spec information on ICP DAS website.

- For Mobile Web

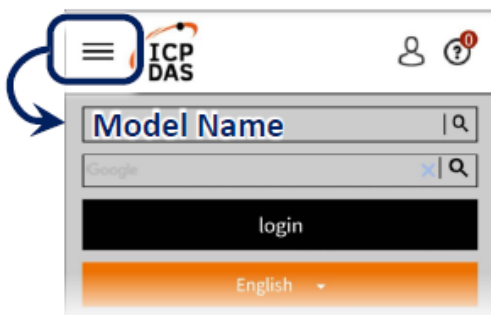

Technical Support


service@icpdas.com

www.icpdas.com

- For Desktop Web



1 Physical Connection

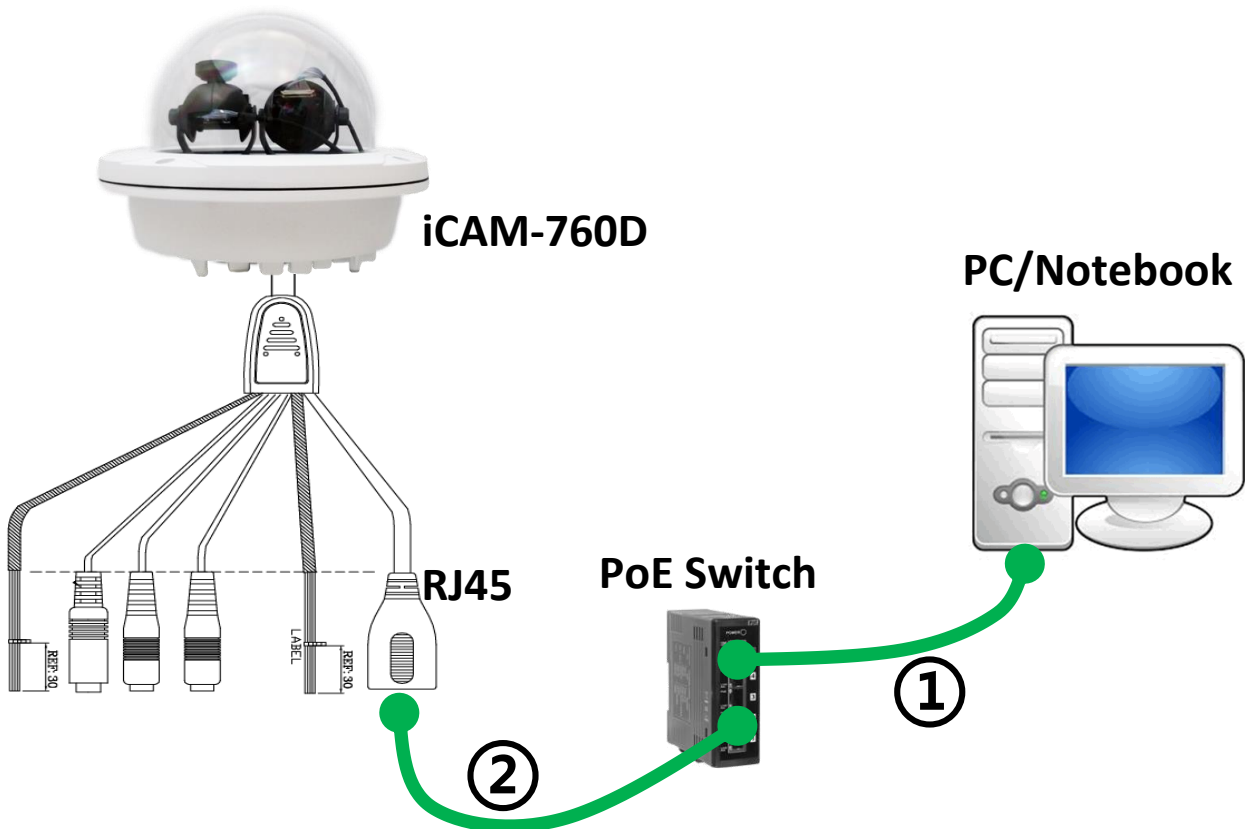

- 1) Be sure that your PC or laptop has connected to your local Ethernet network.
- 2) Be sure that IP Camera has connected to your local networking via the LAN port (RJ45) on the cable. For this PoE model, user can use PoE Switch as power supply.
- 3) Use CAM FINDER software utility in CD to set up the camera (see the next page), or directly set up the camera via the Micro IE browser using the following default IP information:

IP: 192.168.255.2

Submask: 255.255.0.0

Gateway address: 192.168.0.1

DNS Server address: 8.8.8.8


Default

Username: admin

Password: admin

2 CAM FINDER Installation

CAM FINDER software utility installation is required for finding out your camera on local network that you can launch camera web pages via Internet Browser or do some basically setting directly without camera web pages.

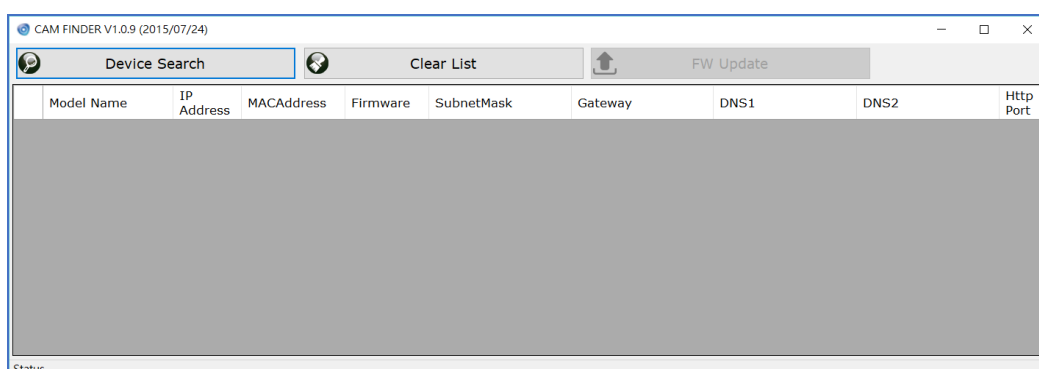

CAM FINDER utility programs are located in the Software **iCAM CD** provided together with the device. Please insert the CD into the PC CD-ROM Drive, open the folder “**Software_Utility**” and then “**CAM FINDER**”. Launch the **CAM FINDER** setup file “**setup.exe**” and complete the installation step by step.

iCAM CD Path: \Software_Utility\Cam Finder\  **setup.exe**

The latest version of the **CAM FINDER** software program is available on the **iCAM** product website, please see the **page 1** of this Quick Start.


3 Network Configuration

CAM FINDER is a utility that provides an easier, more efficient way to configure the IP address and network settings of the devices. It even provides a convenient way to set the network settings for multiple devices simultaneously using the batch setting function. Moreover, **CAM FINDER** can save the network settings for all devices as a backup and restore them when necessary.




Double click the CAM FINDER icon on the Desktop of PC to run the software.

Click the right key of mouse on the gray area and select the [Language] can change the software language that supports for [Traditional Chinese], [English], [Spanish] and [Simplified Chinese].

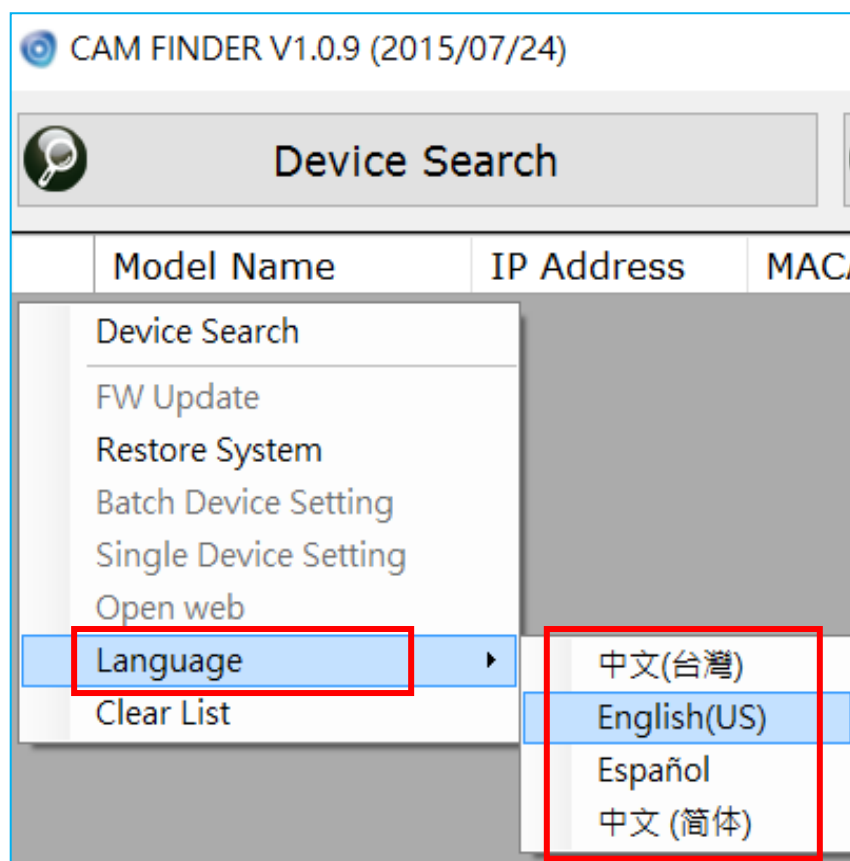


Using CAM FINDER to Assign an IP Address

- 1) Click the **[Device Search]** on the top of Window to search the camera on the network.

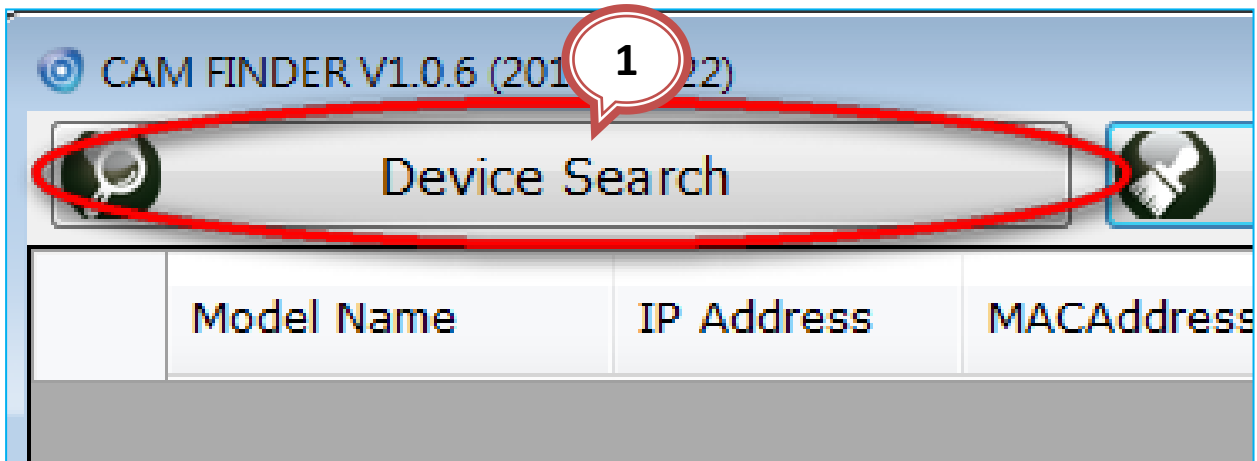

- 2) From the list, select the device with the MAC Address that corresponds to the Camera that is to be configured.

- 3) Double click the selected item or click the **right key of mouse** to the selected item and select the **[Single Device Setting]** to open the Property Page.

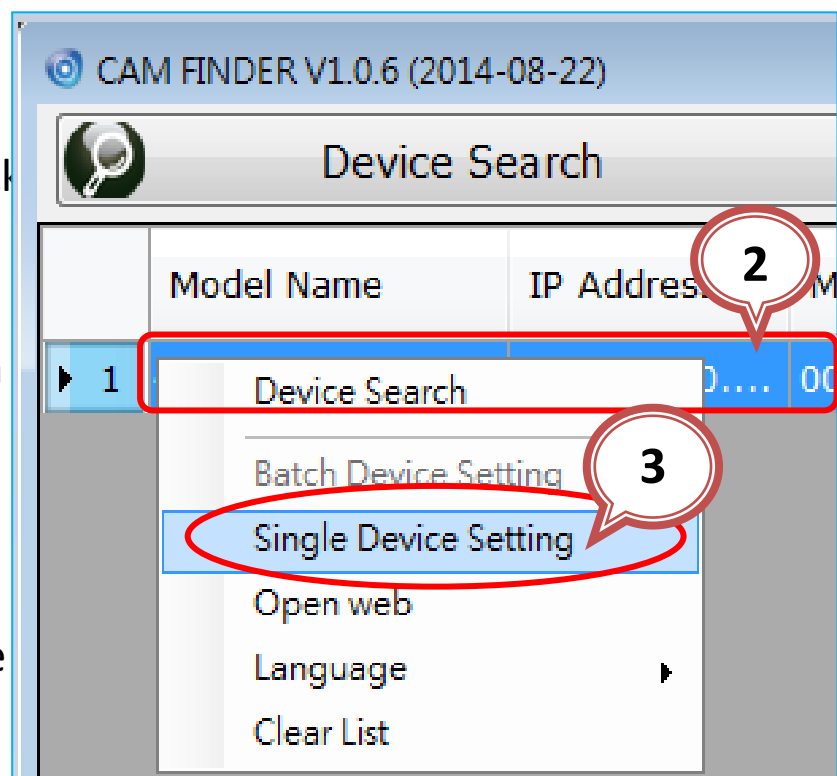

4) Modify the relative network settings of Static IP Address.

The 'Property' window displays the following settings:

Device Setting	
MACAddress	00-34-64-88-99-12
Firmware	0.0.0_1113_4Gboard

Property	
☒ Static IP address	
IP Address	192 . 168 . 33 . 50
SubnetMask	255 . 255 . 255 . 0
Gateway	192 . 168 . 33 . 1
Http Port	80
DNS1	168 . 95 . 1 . 1
DNS2	168 . 95 . 192 . 1

Certification	
☐ Use Custom	
Username	admin
Password	*****

DHCP	
☐ Use DHCP Service	

Buttons: Set, Cancel


Status

5) After modifying the camera properties, click [Set] button to save and enable the configuration modifications.

The 'Property' window displays the same settings as the previous screenshot. The 'Set' button is highlighted with a red circle, and a callout bubble with the number '5' points to it.


Open the Web-based UI of the selected camera

- 1) To access the Web-based UI of the selected unit, run the **[Open Web]** on the select item.

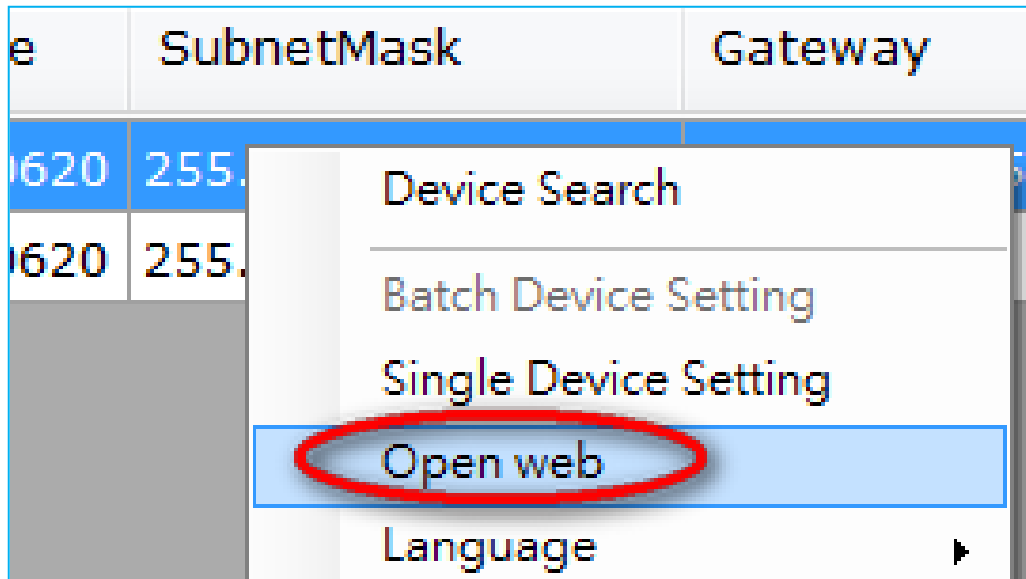

- 2) For first time user, there will be a prompt to install the **NETCAM VIEWER** PLUG-IN. Click the hyper-link directly to download.

Before completing the installation, you should close the browser first for PLUG-IN component installation. After installation completed, re-launch the browser.

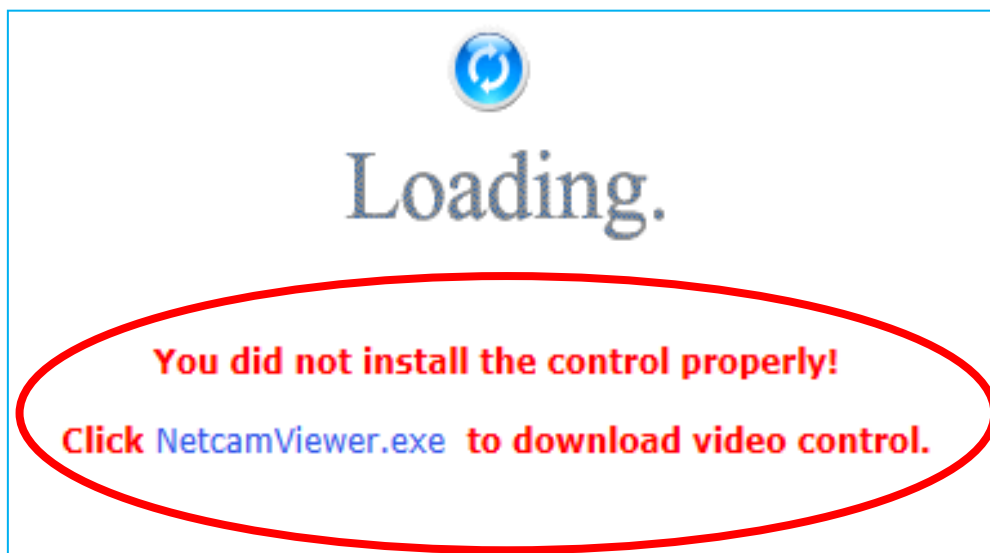

3) If the device has been configured correctly, the default Web browser will open to the home page of the selected device.

* Username and password is required. (Default is admin / admin)

