



I Features

- Universal Inputs and Universal Outputs
- Status LED for Universal inputs and outputs
- Integrated Design Allows You to Take Advantage of Inputs and Outputs
- Any Universal I/O point can be configured as analog input/ output, digital input or counter input
- 100 VDC Over Voltage Protection for Universal Inputs
- Open Wire Detection for +4 to +20 mA Outputs
- Support Modbus RTU Protocol
- Easy Mounting and Connection
- Space Saving Design
- Wide Operating Temperature Range: -25°C to +75°C









Introduction _

The M-6026U-32 of distributed I/O provides a wide variety of input, output, and smart control solutions, all of which are based on a single universal hardware platform. The M-6026U-32 combines inputs and outputs, saving your time and space when both are at a premium. Since M-6032U-32 feature both inputs and outputs on the same board, retailers can reduce the space requirement for I/O boards by as much as 50%! Traditional I/O board schemes required retail operators to mount separate input and output boards within an enclosure, increasing the time and cost to mount the boards. The M-6000 I/O boards are communications devices needed to connect to the facility management system to control refrigeration, HVAC and lighting systems.

Applications _____

- Heating system in buildings
- Ventilation system

- Air-conditioning system
- HVAC control, lighting control, door monitoring

System Specifications _____


RS-485		
Interface	RS-485 x 1	
Format	N, 8, 1	
Baud Rate	1200 to 115200 bps	
Protocol	Modbus/RTU	
Dual Watchdog	Yes, Module (2.3 seconds), Communication (Programmable)	
EMS Protection		
ESD (IEC 61000-4-2)	±4 kV Contact for each Terminal	
	±8 kV Air for Random Point	
Power Requirements		
Power from Terminal Block	24 VAC or 24 VDC	
Fuse Protection	1 A	
Power Consumption	14 W Max.	
Mechanical		
Dimensions (W x L x H)	240 mm x 135 mm x 65 mm	
Environment		
Operating Temperature	-25 to +75°C	
Storage Temperature	-40 to +80°C	
Humidity	10 to 95% RH, Non-condensing	

I/O Specifications _____


Universal Input		
Channels		16
Туре		0 ~ 2.5V, 0 ~ 5 V, 0 ~ 10 V,
		0 to 20 mA, 4 to 20 mA, Pt1000,
		Dry Contact Digital Input
Resolution		16-bit
Accuracy		±0.1% of FSR
Digital Input	On Level	Close to GND
	Off Level	OPEN
Over Voltage Protection		100 VDC
Universal Output		
Channels		16
Туре		0 to 20 mA, 4 to 20 mA, 0 to 10 V
Resolution		12-bit
Accuracy		±0.2% of FSR
Voltage Output Capability		10 V@ 20mA
Open Wire Detection for Current Output		Yes, Only 4 to 20 mA


ICP DAS CO., LTD. Website: http://www.icpdas.com E-mail: sales@icpdas.com

Pin Assignments _____

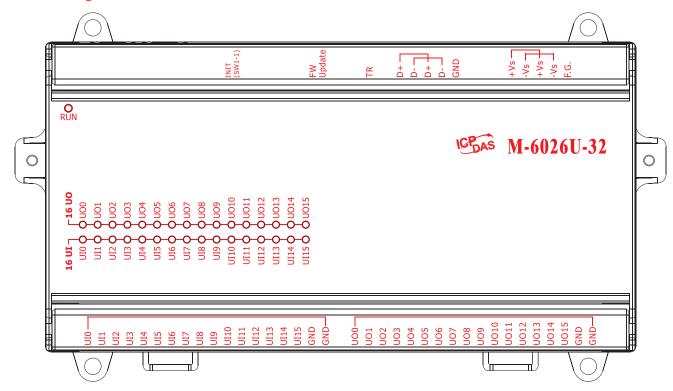


✓ Wire Connections

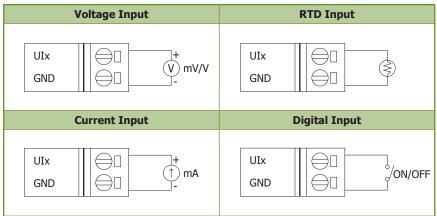



Dimensions (Units: mm)

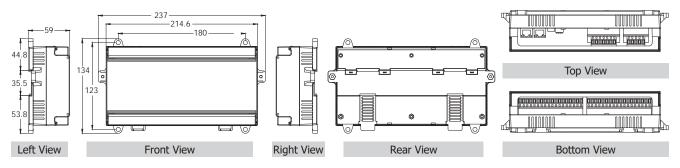

Ordering Information -

M-6026U-32 CR 16-channel Universal Input and 16-channel Universal Output (RoHS)

Website: http://www.icpdas.com E-mail: sales@icpdas.com Vol. LC 1.0.00