


XML_Read folder : c# demo executable file.

Note:

The default working path is located at \temp on the device, so it needs to copy the executable files and all xml file to the device in the \temp directory and the all files could work.

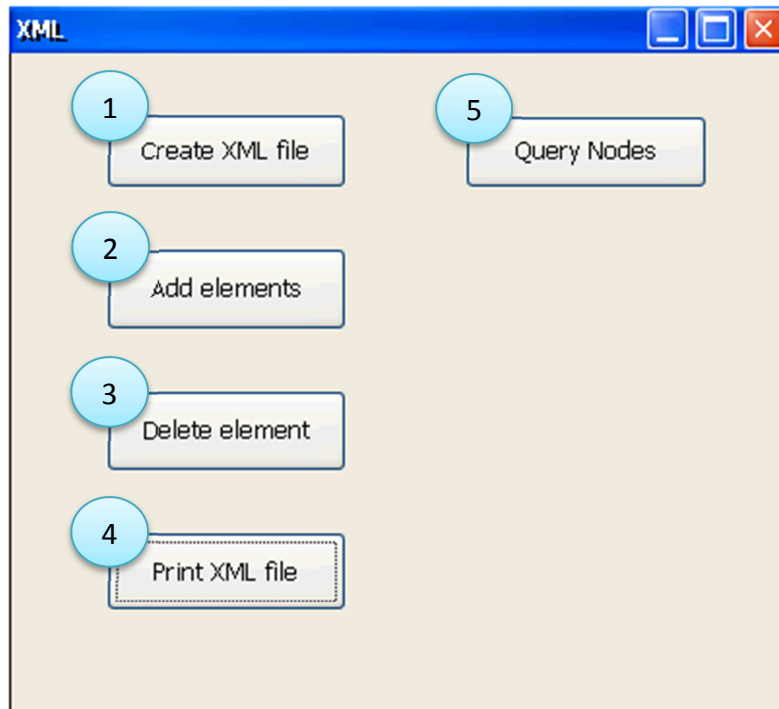

1. Create XML file

Create an XML document file, data.xml on \temp.

2. Add elements

Add the nodes on xml file (data.xml).

3. Delete element

Delete the nodes added on step 2.

4. Print XML file

Print the contents of data.xml on console windows.

5. Query Nodes

Query XML DOM nodes defined on the xml file, e.xml. (The e.xml file must be located at [\\temp](#) on PAC)